

Local Government Energy Audit: Energy Audit Report





Copyright ©2017 TRC Energy Services. All rights reserved.

Reproduction or distribution of the whole, or any part of the contents of this document without written permission of TRC is prohibited. Neither TRC nor any of its employees makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any data, information, method, product or process disclosed in this document, or represents that its use will not infringe upon any privately-owned rights, including but not limited to, patents, trademarks or copyrights.

Partridge Hall

I Normal Ave
Montclair, New Jersey 07043
Montclair State University
July 24, 2018

Final Report by:

TRC Energy Services

Disclaimer

The intent of this energy analysis report is to identify energy savings opportunities and recommend upgrades to the facility's energy using equipment and systems. Approximate savings are included in this report to help make decisions about reducing energy use at the facility. This report, however, is not intended to serve as a detailed engineering design document. Further design and analysis may be necessary in order to implement some of the measures recommended in this report.

The energy conservation measures and estimates of energy savings have been reviewed for technical accuracy. However, estimates of final energy savings are not guaranteed, because final savings may depend on behavioral factors and other uncontrollable variables. TRC Energy Services (TRC) and New Jersey Board of Public Utilities (NJBPU) shall in no event be liable should the actual energy savings vary.

Estimated installation costs are based on TRC's experience at similar facilities, pricing from local contractors and vendors, and/or cost estimates from *RS Means*. The owner of the facility is encouraged to independently confirm these cost estimates and to obtain multiple estimates when considering measure installations. Since actual installed costs can vary widely for certain measures and conditions, TRC and NJBPU do not guarantee installed cost estimates and shall in no event be held liable should actual installed costs vary from estimates.

New Jersey's Clean Energy Program (NJCEP) incentive values provided in this report are estimates based on program information available at the time of the report. Incentive levels are not guaranteed. The NJBPU reserves the right to extend, modify, or terminate programs without prior notice. The owner of the facility should review available program incentives and eligibility requirements prior to selecting and installing any energy conservation measures.

Table of Contents

1	Execu	Executive Summary4					
	1.1	Facility Summary	4				
	1.2	Your Cost Reduction Opportunities					
	Fne	ergy Conservation Measures	Δ				
		ergy Efficient Practices					
		-Site Generation Measures					
	1.3	Implementation Planning	6				
2		ty Information and Existing Conditions					
	2.1	Project Contacts	8				
	2.2	General Site Information					
	2.3	Building Occupancy					
	2.4	Building Envelope					
	2.5	On-Site Generation	9				
	2.6	Energy-Using Systems	10				
	Ligl	hting System	10				
		lled Water System					
		am to Hot Water Heating System					
		Distribution System					
		ect Expansion Air Conditioning System (DX)					
		Iding Energy Management System (BEMS) mestic Hot Water Heating System					
		Iding Plug Load					
3		nergy Use and Costs					
	3.1	Total Cost of Energy	14				
	3.2	Electricity Usage					
	3.3	Steam Usage					
	3.4	Chilled Water Usage					
	3.5	Benchmarking	18				
	3.6	Energy End-Use Breakdown	19				
4	Energ	gy Conservation Measures	20				
	4.1	High Priority ECMs	20				
	4.2	Plug Load Equipment Control - Vending Machines	21				
	ECI	M 1: Vending Machine Control	21				
	4.3	Other Evaluated ECMs	22				
	lmį	olement Demand Control Ventilation (DCV)	22				
5	Energ	gy Efficient Practices	23				
	Red	duce Air Leakage	23				
		se Doors and Windows					
		form Proper Lighting Maintenance					
	Dev	velop a Lighting Maintenance Schedule	23				

	Ensu	re Lighting Controls Are Operating Properly	23
		orm Routine Motor Maintenance	
		n Evaporator/Condenser Coils on AC Systems	
		n and/or Replace HVAC Filters	
		k for and Seal Duct Leakage	
	Repa	air/Replace Steam Traps	24
	Plug	Load Controls	24
	Wate	er Conservation	25
6	On-Site	e Generation Measures	26
	6.1	Photovoltaic	26
	6.2	Combined Heat and Power	
7	Demar	nd Response	28
8	Project	t Funding / Incentives	29
	8.1	SmartStart	30
	8.2	Energy Savings Improvement Program	
9	Energy	Purchasing and Procurement Strategies	32
	9.1	Retail Electric Supply Options	32
	9.2	Retail Natural Gas Supply Options	

Appendix A: Equipment Inventory & Recommendations

Appendix B: ENERGY STAR® Statement of Energy Performance

Table of Figures

Figure 1 – Previous 12 Month Utility Costs	5
Figure 2 – Potential Post-Implementation Costs	5
Figure 3 – Summary of Energy Reduction Opportunities	5
Figure 4 – Project Contacts	8
Figure 5 - Building Schedule	8
Figure 6 – Building Façade	9
Figure 7 - Building Lighting Systems	10
Figure 8 – Air Side Systems	11
Figure 9 – DX Based Systems	12
Figure 10 – Building Energy Management System (BEMS)	13
Figure 11 – Vending Machines	13
Figure 12 - Utility Summary	14
Figure 13 - Energy Cost Breakdown	14
Figure 14 - Electric Usage & Demand	15
Figure 15 - Electric Usage & Demand	15
Figure 16 –Steam Usage	16
Figure 17 –Steam Usage	16
Figure 18 – Chilled Water Usage	17
Figure 19 – Chilled Water Usage	17
Figure 20 - Energy Use Intensity Comparison — Existing Conditions	18
Figure 21 - Energy Use Intensity Comparison – Following Installation of Recommended Measures	18
Figure 22 - Energy Balance (% and kBtu/SF)	19
Figure 23 – Summary of High Priority ECMs	20
Figure 24 – Summary of Plug Load Equipment Controls ECMs	21
Figure 25 – Summary of Other Evaluated ECMs	22
Figure 26 - FCM Incentive Program Fligibility	29

I EXECUTIVE SUMMARY

The New Jersey Board of Public Utilities (NJBPU) has sponsored this Local Government Energy Audit (LGEA) Report for Partridge Hall.

The goal of an LGEA report is to provide you with information on how your facility uses energy, identify energy conservation measures (ECMs) that can reduce your energy use, and provide information and assistance to help facilities implement ECMs. The LGEA report also contains valuable information on financial incentives from New Jersey's Clean Energy Program (NJCEP) for implementing ECMs.

This study was conducted by TRC Energy Services (TRC), as part of a comprehensive effort to assist New Jersey higher education facilities in controlling energy costs and protecting our environment by offering a wide range of energy management options and advice.

I.I Facility Summary

Partridge Hall is a 50,510-square foot university facility which was constructed in 1969. The building is a five-story educational facility having several spaces including classrooms, bathrooms, common areas, hallways, kitchen area, mechanical, electrical, and elevator rooms.

Lighting consists primarily of LED fixtures, which are efficient in performance as well as energy consumption. Exterior lighting is provided by LED screw-in lamps. Lighting control is provided by a combination of occupancy sensor for interior fixture and DDC for exterior fixtures.

Cooling is provided by chilled water (CHW) from the District Energy Plant to Partridge Hall's mechanical room, where it is distributed by pumps to the building's air handling equipment. High pressure steam is provided from the District Energy Plant to Partridge Hall's mechanical room, where it is converted to heating and domestic hot water by steam to water heat exchangers. Heating hot water is distributed to the building's air handling units (AHU) and variable air volume (VAV) reheat coils.

Cooling and ventilation are provided to the zones by a combination of air handling units and split systems. All the units have chilled and hot water coils for cooling and heating respectively.

Electricity, steam, and chilled water are supplied to the building by the campuses central cogeneration plant. A thorough description of the facility and our observations are located in Section 2.


1.2 Your Cost Reduction Opportunities

Energy Conservation Measures

TRC evaluated one (1) measure that represents an opportunity for Partridge Hall to reduce annual energy costs by \$657 and annual greenhouse gas emissions by 3,936 lbs. CO₂e. We estimate that if the measure is implemented as recommended, the project will pay for itself in 1.4 years. TRC has defined high priority measures as the evaluated measures that have a simple payback less than the typical equipment life of the proposed equipment. The breakdown of existing and potential utility costs after project implementation are illustrated in Figure 1 and Figure 2, respectively. Together these measures represent an opportunity to reduce Partridge Hall's annual energy use by 1%.

Figure I - Previous 12 Month Utility Costs

Figure 2 - Potential Post-Implementation Costs

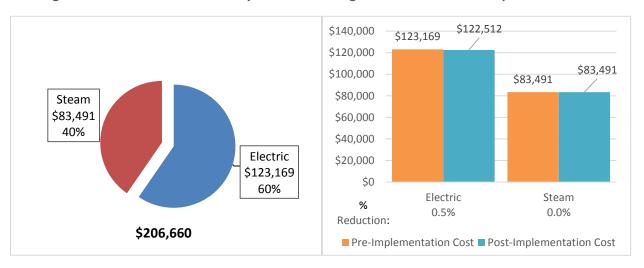

A detailed description of Partridge Hall's existing energy use can be found in Section 3.

Estimates of the total cost, energy savings, and financial incentives for the evaluated energy efficient upgrades are summarized below in Figure 3. A brief description of each category can be found below and a description of savings opportunities can be found in Section 4.

Figure 3 - Summary of Energy Reduction Opportunities

Energy Conservation Measure	High Priority?	Annual Electric Savings (kWh)	Chilled Water Savings (Ton-Hr)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	_	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)	•	CO ₂ e Emissions Reduction (lbs)
HVAC System Improvements		0	2,584	0.0	36.0	\$1,395.66	\$33,985.50	\$0.00	\$33,985.50	24.4	5,272
Implement Demand Control Ventilation	No	▼ 0	2,584	0.0	36.0	\$1,395.66	\$33,985.50	\$0.00	\$33,985.50	24.4	5,272
Plug Load Equipment Control - Vending Machine		3,909	0	0.0	0.0	\$656.66	\$920.00	\$0.00	\$920.00	1.4	3,936
ECM 1 Vending Machine Control Yes		3,909	0	0.0	0.0	\$656.66	\$920.00	\$0.00	\$920.00	1.4	3,936
TOTALS FOR HIGH PRIORITY MEASURES		3,909	0	0.0	0.0	\$656.66	\$920.00	\$0.00	\$920.00	1.4	3,936
TOTALS FOR ALL EVALUATED MEASURES		3,909	2,584	0.0	36.0	\$2,052.32	\$34,905.50	\$0.00	\$34,905.50	17.0	9,208

^{* -} All incentives presented in this table are based on NJ Smart Start Building equipment incentives and assume proposed equipment meets minimum performance criteria for that program.

HVAC System Improvements generally involve the installation of automated controls to reduce heating and cooling demand during periods of reduced demand. These measures could encompass changing temperature setpoints, using outside air for free cooling, or limiting excessive outside air during extreme outdoor air temperature conditions. These measures save energy by reducing the demand on HVAC systems and the amount of time systems operate.

Plug Load Equipment control measures generally involve installing automated devices that limit the power usage or operation of equipment that is plugged into an electric outlets when not in use.

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).

Energy Efficient Practices

TRC also identified 12 low cost or no cost energy efficient practices. A facility's energy performance can be significantly improved by employing certain behavioral or operational adjustments and by performing better routine maintenance on building systems. These practices can extend equipment lifetime, improve occupant comfort, provide better health and safety, as well as reduce annual energy and O&M costs. Potential opportunities identified at Partridge Hall include:

- Reduce Air Leakage
- Close Doors and Windows
- Perform Proper Lighting Maintenance
- Develop a Lighting Maintenance Schedule
- Ensure Lighting Controls Are Operating Properly
- Perform Routine Motor Maintenance
- Clean Evaporator/Condenser Coils on AC Systems
- Clean and/or Replace HVAC Filters
- Check for and Seal Duct Leakage
- Repair/Replace Steam Traps
- Install Plug Load Controls
- Water Conservation

For details on these Energy Efficient Practices, please refer to Section 5.

On-Site Generation Measures

TRC evaluated the potential for installing on-site generation for Partridge Hall. Based on the configuration of the site and its loads there is a low potential for installing any PV and combined heat and power self-generation measures.

For details on our evaluation and on-site generation potential, please refer to Section 6.

1.3 Implementation Planning

To realize the energy savings from the ECMs listed in this report, a project implementation plan must be developed. Available capital must be considered and decisions need to be made whether it is best to pursue individual ECMs separately, groups of ECMs, or a comprehensive approach where all ECMs are implemented together, possibly in conjunction with other facility upgrades or improvements.

Rebates, incentives, and financing are available from NJCEP, as well as other sources, to help reduce the costs associated with the implementation of energy efficiency projects. Prior to implementing any measure, please review the relevant incentive program guidelines before proceeding. This is important because in most cases you will need to submit applications for the incentives prior to purchasing materials or commencing with installation.

The ECMs outlined in this report may qualify under the following program(s):

- SmartStart
- Energy Savings Improvement Program (ESIP)

For facilities wanting to pursue only selected individual measures (or planning to phase implementation of selected measures over multiple years), incentives are available through the SmartStart program. To participate in this program you may utilize internal resources, or an outside firm or contractor, to do the final design of the ECM(s) and do the installation. Program pre-approval is required for some SmartStart incentives, so only after receiving pre-approval should you proceed with ECM installation. The incentive estimates listed above in Figure 3 are based on the SmartStart program. More details on this program and others are available in Section 8.

Larger facilities with an interest in a more comprehensive whole building approach to energy conservation should consider participating in the Pay for Performance (P4P) program. Projects eligible for this project program must meet minimum savings requirements. Final incentives are calculated based on actual measured performance achieved at the end of the project. The application process is more involved, and it requires working with a qualified P4P contractor, but the process may result in greater energy savings overall and more lucrative incentives, up to 50% of project's total cost.

For larger facilities with limited capital availability to implement ECMs, project financing may be available through the Energy Savings Improvement Program (ESIP). Supported directly by the NJBPU, ESIP provides government agencies with project development, design, and implementation support services, as well as, attractive financing for implementing ECMs. An LGEA report (or other approved energy audit) is required for participation in ESIP. Please refer to Section 8.2 for additional information on the ESIP Program.

The Demand Response Energy Aggregator is a (non-NJCEP) program designed to reduce electric loads at commercial facilities, when wholesale electricity prices are high or when the reliability of the electric grid is threatened due to peak power demand. Demand Response (DR) service providers (a.k.a. Curtailment Service Providers) are registered with PJM, the independent system operator (ISO) for mid-Atlantic state region that is charged with maintaining electric grid reliability. By enabling grid operators to call upon commercial facilities to reduce their electric usage during times of peak demand, the grid is made more reliable and overall transmission costs are reduced for all ratepayers. Curtailment Service Providers provide regular payments to medium and large consumers of electric power for their participation in DR programs. Program participation is voluntary and facilities receive payments whether or not they are called upon to curtail their load during times of peak demand. Refer to Section 7 for additional information on this program.

Additional information on relevant incentive programs is located in Section 8. You may also check the following website for more details: www.njcleanenergy.com/ci.

2 FACILITY INFORMATION AND EXISTING CONDITIONS

2.1 Project Contacts

Figure 4 – Project Contacts

Name	Role	E-Mail	Phone #				
Customer							
Ana Pinto	Director of Energy Management	pintoa@mail.montclair.edu	973-655-3244				
TRC Energy Services							
Moussa Traore	Auditor	MTraore@trcsolutions.com	(732) 855-0033				

2.2 General Site Information

On July 06, 2017, TRC performed an energy audit at Partridge Hall located in Montclair, New Jersey. TRC met with Ana Pinto to review the facility operations and help focus our investigation on specific energy-using systems.

Partridge Hall is a 50,510-square foot university facility which was constructed in 1969. The building is a five-story educational facility having several spaces including classrooms, bathrooms, common areas, hallways, kitchen area, mechanical, electrical, and elevator rooms. Partridge Hall is the home of the graduate school and the new school of nursing. The facility opened in fall 2016 after undergoing a major renovation that began in October 2015.

2.3 Building Occupancy

The school building is open all days of the week. The typical schedule is presented in the table below. The entire facility is used year-round by the community and camps are run throughout the summer.

Figure 5 - Building Schedule

Building Name	Weekday/Weekend	Operating Schedule
Partridge Hall	Weekday	8:00 AM - 8:00 PM
Partridge Hall	Weekend	8:00 AM - 8:00 PM

2.4 Building Envelope

Partridge Hall is a five-story building. The construction is of concrete masonry block with finished and painted exterior and double-pane, tinted windows with fixed frames. The sloped roof is constructed of tile roofing material.



Figure 6 – Building Façade

2.5 On-Site Generation

Partridge Hall does not have any on-site electric generation capacity.

2.6 Energy-Using Systems


Please see Appendix A: Equipment Inventory & Recommendations for an inventory of the facility's equipment.

Lighting System

Lighting is provided mostly by 2-foot and 4-foot fixtures that contain linear LED tubes. Most of the fixtures are 1-lamp, 2-lamp, and 6-lamp fixtures. In addition to the 4-foot fixtures, the facility also has 2-foot LED fixtures.

Some of the interior spaces are lit by 9-Watt LED screw-in lamps. All the exit signs are 2-Watt LED lamps.



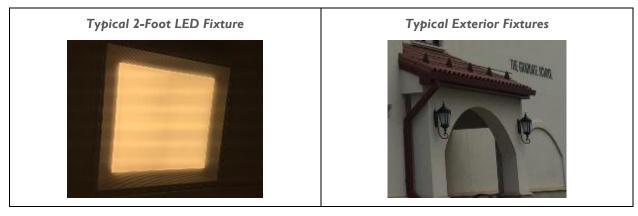

Lighting control in interior areas is provided by occupancy sensors. The exception is exit signs, which operate continuously.

The building's exterior lighting is minimal and consists primarily of LED 11-Watt screw-in lamps that are controlled by DDC.

Chilled Water System

Chilled water (CHW) is provided from the District Energy Plant to Partridge Hall's mechanical room, where it is distributed by pumps to the building's air handling equipment. The water is distributed by two (2) variable speed 10 hp pumps.

Steam to Hot Water Heating System

The heating hot water (HHW) system consists of a steam to water heat exchanger in the mechanical room that receives low pressure steam from the District Energy Plant. From there, the HHW is distributed to the building's AHUs and VAV heating coils. The HHW is distributed by two (2) 7.5 hp hot water pumps equipped with variable speed drives (VFDs).

Air Distribution System

There are three (3) main AHUs for the building that provide the space conditioning and ventilation. Rooftop units (RTU) one (1) and two (2) have 10 hp supply fans (SF) each and no return fans. Both of the fan motors are equipped with VFDs and are connected to zone side variable air volume boxes with reheat.

In addition to the two (2) RTU, the facility is also served by an AHU with two (2) 7.5 hp supply fans (SF) and a 5 hp return fan (RF). Both supply and the return fans have variable frequency drives (VFD) for demand based speed variation. Similar to the RTU units, AHU-1 is also connected to zone side VAV boxes.





Generally, the zone temperatures are maintained between 70° and 73° F. The equipment is approximately ten years old and in good condition.

Direct Expansion Air Conditioning System (DX)

There are five (5) split-system air-source heat pumps at the facility. The unit capacities range from two (2) to three (3) tons. All of these units have efficiencies between 8.5 and 11.3 EER.





Building Energy Management System (BEMS)

The majority of the facility is controlled with an automated logic controls (ALC) building energy management system (BEMS). The BEMS provides controls for the chiller, fans, pumps, and terminal units.




Figure 10 - Building Energy Management System (BEMS)

Domestic Hot Water Heating System

Low pressure steam from the District Energy Plant produces domestic hot water through a dedicated steam to water heat exchanger located in the mechanical room. The pump motors are approximately ten (10) years old and in good condition.

Building Plug Load

There are about 87 computer work stations throughout the facility. Roughly 90% of the computers are desktop units with LCD monitors. There is no centralized personal computer power management software installed. The facility has two (2) refrigerated and two (2) non-refrigerated beverage vending machines located in the lobby.



Figure II - Vending Machines

3 SITE ENERGY USE AND COSTS

This building receives electricity through a master meter. It also receives electricity, steam and chilled water from the campus central cogeneration plant. These utilities were prorated for individual buildings based on building size and function.

Prorated and direct purchase utility data were evaluated to determine the annual energy performance metrics for the building in energy cost per square foot and energy usage per square foot. These metrics are an estimate of the relative energy efficiency of this building. There are a number of factors that could cause the energy use of this building to vary from the "typical" energy usage profile for facilities with similar characteristics. Local weather conditions, building age and insulation levels, equipment efficiency, daily occupancy hours, changes in occupancy throughout the year, equipment operating hours, and energy efficient behavior of occupants all contribute to benchmarking scores. Please refer to the Benchmarking section within Section 3.5 for additional information.

3.1 Total Cost of Energy

The following energy consumption and cost data is based on data that was provided by the campus for each utility. A profile of the annual energy consumption and energy cost of the facility was developed from this information.

 Utility Summary for Partridge Hall

 Fuel
 Usage
 Cost

 Electricity
 1,461,911 kWh
 \$123,169

 Steam
 4,580 kLbs
 \$83,491

 Total
 \$206,660

Figure 12 - Utility Summary

The current annual energy cost for this facility is \$206,660 as shown in the chart below.

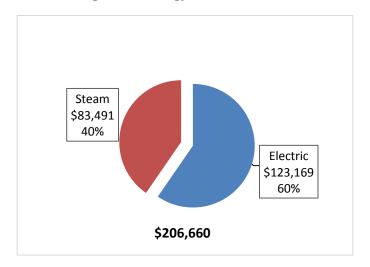


Figure 13 - Energy Cost Breakdown

3.2 Electricity Usage

Electricity is provided by PSE&G and the campus cogeneration plant. The average electric for electricity purchased from PSE&G was \$0.168/kWh, which is the blended rate that includes energy supply, distribution, and other charges. This rate is used throughout the analyses in this report to assess energy costs and savings. The monthly electricity consumption is shown in the chart below.

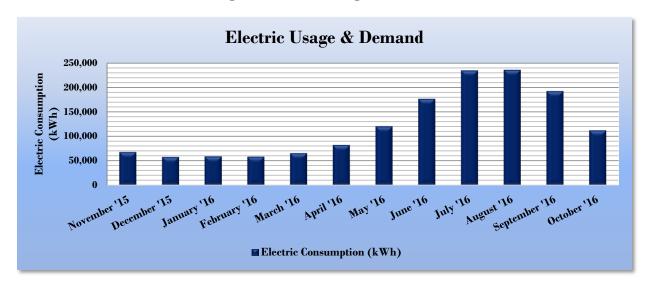


Figure 14 - Electric Usage & Demand

Figure 15 - Electric Usage & Demand

Electric Billing Data for Partridge Hall								
Period Ending	Days in Period	Electric Usage (kWh)	Total Electric Cost	TRC Estimated Usage?				
11/30/15	30	67,814	\$4,833	Yes				
12/31/15	31	57,633	\$4,598	Yes				
1/31/16	31	58,911	\$4,006	Yes				
2/28/16	28	58,358	\$7,966	Yes				
3/31/16	31	65,581	\$4,471	Yes				
4/30/16	30	82,084	\$6,015	Yes				
5/31/16	31	120,340	\$9,793	Yes				
6/30/16	30	176,417	\$15,266	Yes				
7/31/16	31	234,624	\$20,416	Yes				
8/31/16	31	235,726	\$20,601	Yes				
9/30/16	30	192,306	\$16,297	Yes				
10/31/16	31	112,118	\$8,906	Yes				
Totals	365	1,461,911	\$123,169	12				
Annual	365	1,461,911	\$123,169					

3.3 Steam Usage

Steam is provided by campus CHP. The average steam cost for the past 12 months is \$18.227/kLb, which is the blended rate used throughout the analyses in this report. The steam consumption is shown in the table below.

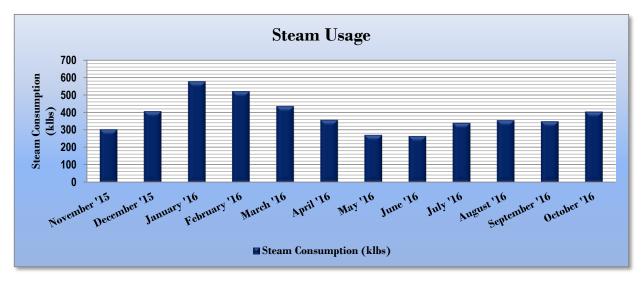


Figure 16 -Steam Usage

Figure 17 –Steam Usage

Steam Billing Data for Partridge Hall								
Period Ending	Days in Period	Usage I		TRC Estimated Usage?				
11/30/15	30	303	\$4,618	Yes				
12/31/15	31	406	\$6,241	Yes				
1/31/16	31	577	\$9,014	Yes				
2/28/16	28	521	\$21,594	Yes				
3/31/16	31	435	\$6,612	Yes				
4/30/16	30	356	\$5,352	Yes				
5/31/16	31	271	\$4,220	Yes				
6/30/16	30	264	\$4,005	Yes				
7/31/16	31	340 \$5,117		Yes				
8/31/16	31	355	\$5,348	Yes				
9/30/16	30	349	\$5,232	Yes				
10/31/16	31	404	\$6,138	Yes				
Totals	365	4,580	\$83,491	12				
Annual	365	4,580	\$83,491					

3.4 Chilled Water Usage

Chilled water is provided by the campus cogeneration plant. The average chilled water cost is \$0.327/ton-hr, which is the blended rate used throughout the analyses in this report. The chilled water consumption is shown in the table below. Chilled water is produced by steam engine chillers at the cogeneration plant, however, for ease of analysis and reporting chilled water use and cost has been combined with electricity use and cost in this report in the summary graphics.

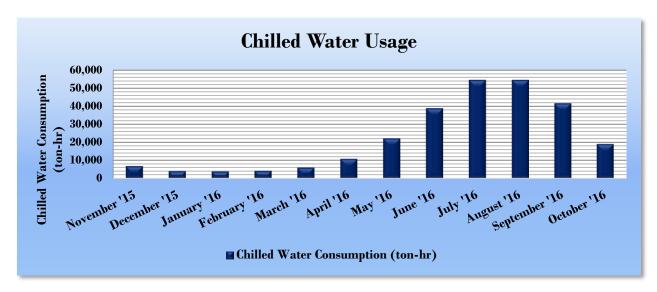


Figure 18 - Chilled Water Usage

Figure 19 - Chilled Water Usage

	Chilled \	Water Billing Data fo	r Partridge Hall	
Period Ending	Days in Period	Chilled Water Usage (ton-hr)	Total Electric Cost	TRC Estimated Usage?
11/30/15	30	6,952	\$2,276	Yes
12/31/15	31	4,134	\$1,361	Yes
1/31/16	31	4,029	\$1,341	Yes
2/28/16	28	4,353	\$1,783	Yes
3/31/16	31	6,106	\$1,994	Yes
4/30/16	30	10,932	\$3,544	Yes
5/31/16	31	22,168	\$7,374	Yes
6/30/16	30	38,784	\$12,663	Yes
7/31/16	31	54,396	\$17,663	Yes
8/31/16	31	54,396	\$17,680	Yes
9/30/16	30	41,529	\$13,447	Yes
10/31/16	31	19,063	\$6,223	Yes
Totals	365 266,84		\$87,349	12
Annual	365	266,841	\$87,349	

3.5 Benchmarking

This facility was benchmarked using *Portfolio Manager*, an online tool created and managed by the United States Environmental Protection Agency (EPA) through the ENERGY STAR® program. Portfolio Manager analyzes your building's consumption data, cost information, and operational use details and then compares its performance against a national median for similar buildings of its type. Metrics provided by this analysis are Energy Use Intensity (EUI) and an ENERGY STAR® score for select building types.

The EUI is a measure of a facility's energy consumption per square foot, and it is the standard metric for comparing buildings' energy performance. Comparing the EUI of a building with the national median EUI for that building type illustrates whether that building uses more or less energy than similar buildings of its type on a square foot basis. EUI is presented in terms of "site energy" and "source energy." Site energy is the amount of fuel and electricity consumed by a building as reflected in utility bills. Source energy includes fuel consumed to generate electricity consumed at the site, factoring in electric production and distribution losses for the region.

Energy Use Intensity Comparison - Existing Conditions								
	Dortridge Hell	National Median						
	Partridge Hall	Building Type: Higher Education - Public						
Source Energy Use Intensity (kBtu/ft²)	440.0	262.6						
Site Energy Use Intensity (kBtu/ft²)	207.0	130.7						

Figure 20 - Energy Use Intensity Comparison - Existing Conditions

Implementation of all recommended measures in this report would improve the building's estimated EUI significantly, as shown in the table below:

Energy Use Intensity Comparison - Following Installation of Recommended Measures								
	Dortridge Hell	National Median						
	Partridge Hall	Building Type: Higher Education - Public						
Source Energy Use Intensity (kBtu/ft²)	439.2	262.6						
Site Energy Use Intensity (kBtu/ft²)	206.8	130.7						

Figure 21 - Energy Use Intensity Comparison - Following Installation of Recommended Measures

Many types of commercial buildings are also eligible to receive an ENERGY STAR® score. This score is a percentile ranking from 1 to 100. It compares your building's energy performance to similar buildings nationwide. A score of 50 represents median energy performance, while a score of 75 means your building performs better than 75 percent of all similar buildings nationwide and may be eligible for ENERGY STAR® certification.

As the electric and gas accounts were shared between various buildings, it was not possible to benchmark these buildings and provide a score individually. A campus wide Portfolio Manager Statement of Energy Performance (SEP) was generated.

For more information on ENERGY STAR® certification go to: https://www.energystar.gov/buildings/facility-owners-and-managers/existing-buildings/earn-recognition/energy-star-certification/how-app-1.

A Portfolio Manager account has been created online for your facility and you will be provided with the login information for the account. We encourage you to update your utility information in Portfolio Manager regularly, so that you can keep track of your building's performance. Free online training is available to help you use ENERGY STAR® Portfolio Manager to track your building's performance at: https://www.energystar.gov/buildings/training.

3.6 Energy End-Use Breakdown

In order to provide a complete overview of energy consumption across building systems, an energy balance was performed. An energy balance utilizes standard practice engineering methods to evaluate all components of the various electric and fuel-fired systems found in a building to determine their proportional contribution to overall building energy usage. This chart of energy end uses highlights the relative contribution of each equipment category to total energy usage. This can help determine where the greatest benefits might be found from energy efficiency measures.

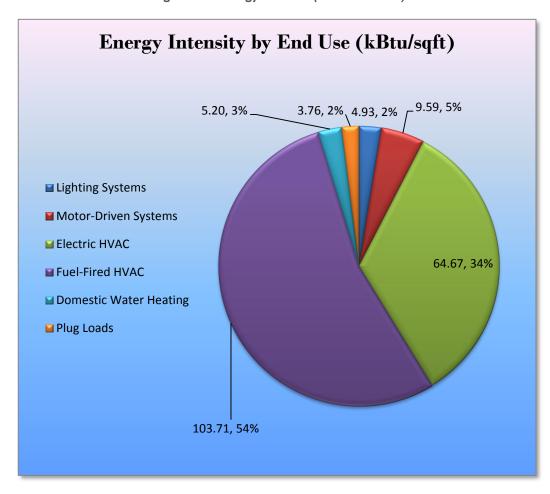


Figure 22 - Energy Balance (% and kBtu/SF)

4 ENERGY CONSERVATION MEASURES

Level of Analysis

The goal of this audit report is to identify potential energy efficiency opportunities, help prioritize specific measures for implementation, and provide information to the Partridge Hall regarding financial incentives for which they may qualify to implement the recommended measures. For this audit report, most measures have received only a preliminary analysis of feasibility which identifies expected ranges of savings and costs. This level of analysis is usually considered sufficient to demonstrate project cost-effectiveness and help prioritize energy measures. Savings are based on the New Jersey Clean Energy Program Protocols to Measure Resource Savings dated June 29, 2016, approved by the New Jersey Board of Public Utilities. Further analysis or investigation may be required to calculate more precise savings based on specific circumstances. A higher level of investigation may be necessary to support any custom SmartStart or Pay for Performance, or Direct Install incentive applications. Financial incentives for the ECMs identified in this report have been calculated based the NJCEP prescriptive SmartStart program. Some measures and proposed upgrade projects may be eligible for higher incentives than those shown below through other NJCEP programs as described in Section 8.

The following sections describe the evaluated measures.

4.1 High Priority ECMs

The measures below have been evaluated by the auditor and are recommended for implementation at the facility.

CO₂e **Annual Estimated Estimated** Estimated Electric Water Fuel **Energy Cost** Payback Emissions **Energy Conservation Measure** Install Cost **Net Cost** Incentive Savings Savings Savings Savings Savings Period Reduction (\$) (\$)* (\$) (kWh) (Ton-Hr) (MMBtu) (kW) (\$) (yrs)** (lbs) ECM 1 Vending Machine Control 3,909 0.0 0.0 \$656.66 \$920.00 \$0.00 \$920.00 3.936 TOTALS 3.909 0.0 0.0

Figure 23 – Summary of High Priority ECMs

^{* -} All incentives presented in this table are based on NJ Smart Start Building equipment incentives and assume proposed equipment meets minimum performance criteria for that program.

^{** -} Simple Pay back Period is based on net measure costs (i.e. after incentives).

4.2 Plug Load Equipment Control - Vending Machines

Our recommendations for plug load equipment controls are summarized in Figure 24 below.

Figure 24 - Summary of Plug Load Equipment Controls ECMs

Energy Conservation Measure	Annual Electric Savings (kWh)	Chilled Water Savings (Ton-Hr)			_	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)		CO ₂ e Emissions Reduction (Ibs)
Plug Load Equipment Control - Vending Machine		0	0.0	0.0	\$656.66	\$920.00	\$0.00	\$920.00	1.4	3,936
ECM 1 Vending Machine Control	3,909	0	0.0	0.0	\$656.66	\$920.00	\$0.00	\$920.00	1.4	3,936

ECM 1: Vending Machine Control

Summary of Measure Economics

	Chilled Water Savings (Ton-Hr)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)		Estimated Net Cost (\$)	Simple Payback Period (yrs)	CO ₂ e Emissions Reduction (lbs)
3,909	0	0.0	0.0	\$656.66	\$920.00	\$0.00	\$920.00	1.4	3,936

Measure Description

Vending machines operate continuously, even during non-business hours. It is recommended to install occupancy sensor controls to reduce the energy use. These controls power down vending machines when the vending machine area has been vacant for some time, then power up at regular intervals, as needed, to turn machine lights on or keep the product cool. Energy savings are a dependent on vending machine and activity level in the area surrounding the machines.

4.3 Other Evaluated ECMs

The measures below have been evaluated by the auditor but are not recommended for implementation at the facility. Reasons for exclusion can be found in each measure description section.

Figure 25 - Summary of Other Evaluated ECMs

Energy Conservation Measure	Annual Electric Savings (kWh)	Chilled Water Savings (Ton-Hr)	Peak Demand Savings (kW)		•	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)	•	CO ₂ e Emissions Reduction (lbs)
HVAC System Improvements	0	2,584	0.0	36.0	\$1,395.66	\$33,985.50	\$0.00	\$33,985.50	24.4	5,272
Implement Demand Control Ventilation	0	2,584	0.0	36.0	\$1,395.66	\$33,985.50	\$0.00	\$33,985.50	24.4	5,272
TOTALS	0	2,584	0.0	36.0	\$1,395.66	\$33,985.50	\$0.00	\$33,985.50	24.4	5,272

^{* -} All incentives presented in this table are based on NJ Smart Start Building equipment incentives and assume proposed equipment meets minimum performance criteria for that program.

Implement Demand Control Ventilation (DCV)

Summary of Measure Economics

Annual Electric Savings (kWh)	Chilled Water Savings (Ton-Hr)		Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)		Estimated Net Cost (\$)	Simple Payback Period (yrs)	CO ₂ e Emissions Reduction (lbs)
0	2,584	0.0	36.0	\$1,395.66	\$33,985.50	\$0.00	\$33,985.50	24.4	5,272

Measure Description

Demand control ventilation (DCV) monitors indoor air CO₂ content to measure room occupancy. This data is used to regulate the amount of outdoor air provided to the space for ventilation. In order to ensure adequate air quality, standard ventilation systems often provide outside air based on a space's estimated maximum occupancy. However, during low occupancy periods, the space may be over ventilated. This wastes energy through excessive fan usage and additional cost to heat and cool the excessive air flow. DCV reduces unnecessary outdoor air intake by regulating ventilation based on actual occupancy levels, saving significant amounts of energy. DCV is best suited for facilities where occupancy levels vary significantly hour-to-hour and day-to-day.

Energy savings associated with DCV are based on hours of operation, space occupancy, system air flow, outside air reduction, and other factors. Energy savings results from eliminating unnecessary ventilation and space conditioning.

Reasons for not Recommending

DCV is not recommended for this building due to the long payback.

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).

5 ENERGY EFFICIENT PRACTICES

In addition to the quantifiable savings estimated in Section 4, a facility's energy performance can also be improved through application of many low cost or no-cost energy efficiency strategies. By employing certain behavioral and operational changes and performing routine maintenance on building systems, equipment lifetime can be extended; occupant comfort, health and safety can be improved; and energy and O&M costs can be reduced. The recommendations below are provided as a framework for developing a whole building maintenance plan that is customized to your facility. Consult with qualified equipment specialists for details on proper maintenance and system operation.

Reduce Air Leakage

Air leakage, or infiltration, occurs when outside air enters a building uncontrollably through cracks and openings. Properly sealing such cracks and openings can significantly reduce heating and cooling costs, improve building durability, and create a healthier indoor environment. This includes caulking or installing weather stripping around leaky doors and windows allowing for better control of indoor air quality through controlled ventilation.

Close Doors and Windows

Ensure doors and windows are closed in conditioned spaces. Leaving doors and windows open leads to a significant increase in heat transfer between conditioned spaces and the outside air. Reducing a facility's air changes per hour (ACH) can lead to increased occupant comfort as well as significant heating and cooling savings, especially when combined with proper HVAC controls and adequate ventilation.

Perform Proper Lighting Maintenance

In order to sustain optimal lighting levels, lighting fixtures should undergo routine maintenance. Light levels decrease over time due to lamp aging, lamp and ballast failure, and buildup of dirt and dust on lamps, fixtures and reflective surfaces. Together, these factors can reduce total illumination by 20% - 60% or more, while operating fixtures continue drawing full power. To limit this reduction, lamps, reflectors and diffusers should be thoroughly cleaned of dirt, dust, oil, and smoke film buildup approximately every 6 – 12 months.

Develop a Lighting Maintenance Schedule

In addition to routine fixture cleaning, development of a maintenance schedule can both ensure maintenance is performed regularly and can reduce the overall cost of fixture re-lamping and re-ballasting. By re-lamping and re-ballasting fixtures in groups, lighting levels are better maintained and the number of site visits by a lighting technician or contractor can be minimized, decreasing the overall cost of maintenance.

Ensure Lighting Controls Are Operating Properly

Lighting controls are very cost-effective energy efficient devices, when installed and operating correctly. As part of a lighting maintenance schedule, lighting controls should be tested annually to ensure proper functioning. For occupancy sensors, this requires triggering the sensor and verifying that the sensor's timer settings are correct. For daylight sensors, maintenance involves cleaning of sensor lenses and confirming setpoints and sensitivity are appropriately configured.

Perform Routine Motor Maintenance

Motors consist of many moving parts whose collective degradation can contribute to a significant loss of motor efficiency. In order to prevent damage to motor components, routine maintenance should be performed. This maintenance consists of cleaning surfaces and ventilation openings on motors to prevent overheating, lubricating moving parts to reduce friction, inspecting belts and pulleys for wear and to ensure they are at proper alignment and tension, and cleaning and lubricating bearings. Consult a licensed technician to assess these and other motor maintenance strategies.

Clean Evaporator/Condenser Coils on AC Systems

Dirty evaporators and condensers coils cause a restriction to air flow and restrict heat transfer. This results in increased evaporator and condenser fan load and a decrease in cooling system performance. Keeping the coils clean allows the fans and cooling system to operate more efficiently.

Clean and/or Replace HVAC Filters

Air filters work to reduce the amount of indoor air pollution and increase occupant comfort. Over time, filters become less and less effective as particulate buildup increases. In addition to health concerns related to clogged filters, filters that have reached saturation also restrict air flow through the facility's air conditioning or heat pump system, increasing the load on the distribution fans and decreasing occupant comfort levels. Filters should be checked monthly and cleaned or replaced when appropriate.

Check for and Seal Duct Leakage

Duct leakage in commercial buildings typically accounts for 5% to 25% of the supply airflow. In the case of rooftop air handlers, duct leakage can occur to the outside of the building, significantly increasing cooling and heating costs. By sealing sources of leakage, cooling, heating, and ventilation energy use can be reduced significantly, depending on the severity of air leakage.

Repair/Replace Steam Traps

Properly functioning steam traps ensure that all latent heat in the steam is delivered to the end use by preventing pressurized steam from leaking. Steam traps should be inspected as part of the regular steam system maintenance. Traps that are blocked, venting, or allowing steam to leak through should be repaired or replaced. Repairing or replacing existing steam traps will reduce steam losses.

Plug Load Controls

There are a variety of ways to limit the energy use of plug loads including increasing occupant awareness, removing under-utilized equipment, installing hardware controls, and using software controls. Some control steps to take are to enable the most aggressive power settings on existing devices or install load sensing or occupancy sensing (advanced) power strips. For additional information refer "Plug Load Best Practices Guide" http://www.advancedbuildings.net/plug-load-best-practices-guide-offices.

Water Conservation

Installing low-flow faucets or faucet aerators, low-flow showerheads, and kitchen sink pre-rinse spray valves saves both energy and water. These devices save energy by reducing the overall amount of hot water used hence reducing the energy used to heat the water. The flow ratings for EPA WaterSense™ (http://www3.epa.gov/watersense/products) labeled devices are 1.5 gallons per minute (gpm) for bathroom faucets, 2.0 gpm for showerheads, and 1.28 gpm for pre-rinse spray valves.

Installing dual flush or low-flow toilets and low-flow or waterless urinals are additional ways to reduce the sites water use, however, these devices do not provide energy savings at the site level. Any reduction in water use does however ultimately reduce grid level electricity use since a significant amount of electricity is used to deliver water from reservoirs to end users. The EPA WaterSense™ ratings for urinals is 0.5 gallons per flush (gpf) and toilets that use as little as 1.28 gpf (this is lower than the current 1.6 gpf federal standard).

6 ON-SITE GENERATION MEASURES

On-site generation measure options include both renewable (e.g., solar, wind) and non-renewable (e.g., fuel cells) on-site technologies that generate power to meet all or a portion of the electric energy needs of a facility, often repurposing any waste heat where applicable. Also referred to as distributed generation, these systems contribute to Greenhouse Gas (GHG) emission reductions, demand reductions and reduced customer electricity purchases, resulting in the electric system reliability through improved transmission and distribution system utilization.

The State of New Jersey's Energy Master Plan (EMP) encourages new distributed generation of all forms and specifically focuses on expanding use of combined heat and power (CHP) by reducing financial, regulatory and technical barriers and identifying opportunities for new entries. The EMP also outlines a goal of 70% of the State's electrical needs to be met by renewable sources by 2050.

Preliminary screenings were performed to determine the potential that a generation project could provide a cost-effective solution for your facility. Before making a decision to implement, a feasibility study should be conducted that would take a detailed look at existing energy profiles, siting, interconnection, and the costs associated with the generation project including interconnection costs, departing load charges, and any additional special facilities charges.

6.1 Photovoltaic

Sunlight can be converted into electricity using photovoltaics (PV) modules. Modules are racked together into an array that produces direct current (DC) electricity. The DC current is converted to alternating current (AC) through an inverter. The inverter is interconnected to the facility's electrical distribution system. The amount of unobstructed area available determines how large of a solar array can be installed. The size of the array combined with the orientation, tilt, and shading elements determines the energy produced.

A preliminary screening based on the campus' electric demand and the size and location of free areas on campus was performed and is addressed in the campus level summary report.

For more information on solar PV technology and commercial solar markets in New Jersey, or to find a qualified solar installer, who can provide a more detailed assessment of the specific costs and benefits of solar develop of the site, please visit the following links below:

- Basic Info on Solar PV in NJ: http://www.njcleanenergy.com/whysolar
- NJ Solar Market FAQs: http://www.njcleanenergy.com/renewable-energy/program-updates-and-background-information/solar-transition/solar-market-faqs
- **Approved Solar Installers in the NJ Market**: http://www.njcleanenergy.com/commercial-industrial/programs/nj-smartstart-buildings/tools-and-resources/tradeally/approved vendorsearch/?id=60&start=1

6.2 Combined Heat and Power

Combined heat and power (CHP) is the on-site generation of electricity along with the recovery of heat energy, which is put to beneficial use. Common technologies for CHP include reciprocating engines, microturbines, fuel cells, backpressure steam turbines, and (at large facilities) gas turbines. Electric generation from a CHP system is typically interconnected to local power distribution systems. Heat is recovered from exhaust and ancillary cooling systems and interconnected to the existing hot water (or steam) distribution systems.

The campus has a CHP plant that uses natural gas fired turbines to generate electricity. Waste heat from the turbines is used to produce steam which is either delivered to buildings on campus or used to produce chilled water which is delivered to buildings on campus. Since the campus has a CHP that serves a significant portion of the campus further evaluation of individual building CHP applications were not done.

7 DEMAND RESPONSE

Demand Response (DR) is a program designed to reduce the electric load of commercial facilities when electric wholesale prices are high or when the reliability of the electric grid is threatened due to peak demand. Demand Response service providers (a.k.a. Curtailment Service Providers) are registered with PJM, the independent system operator (ISO) for mid-Atlantic state region that is charged with maintaining electric grid reliability.

By enabling grid operators to call upon Curtailment Service Providers and commercial facilities to reduce electric usage during times of peak demand, the grid is made more reliable and overall transmission costs are reduced for all ratepayers. Curtailment Service Providers provide regular payments to medium and large consumers of electric power for their participation in DR programs. Program participation is voluntary and participants receive payments whether or not their facility is called upon to curtail their electric usage.

Typically an electric customer needs to be capable of reducing their electric demand, within minutes, by at least 100 kW or more in order to participate in a DR program. Customers with a greater capability to quickly curtail their demand during peak hours will receive higher payments. Customers with back-up generators onsite may also receive additional DR payments for their generating capacity if they agree to run the generators for grid support when called upon. Eligible customers who have chosen to participate in a DR programs often find it to be a valuable source of revenue for their facility because the payments can significantly offset annual electric costs.

Participating customers can often quickly reduce their peak load through simple measures, such as temporarily raising temperature set points on thermostats, so that air conditioning units run less frequently, or agreeing to dim or shut off less critical lighting. This usually requires some level of building automation and controls capability to ensure rapid load reduction during a DR curtailment event. DR program participants may need to install smart meters or may need to also sub-meter larger energy-using equipment, such as chillers, in order to demonstrate compliance with DR program requirements.

DR does not include the reduction of electricity consumption based on normal operating practice or behavior. For example, if a company's normal schedule is to close for a holiday, the reduction of electricity due to this closure or scaled-back operation is not considered a demand response activity in most situations.

The first step toward participation in a DR program is to contact a Curtailment Service Provider. A list of these providers is available on PJM's website and it includes contact information for each company, as well as the states where they have active business (http://www.pjm.com/markets-and-operations/demand-response/csps.aspx). PJM also posts training materials that are developed for program members interested in specific rules and requirements regarding DR activity (http://www.pjm.com/training/training%20material.aspx), along with a variety of other DR program information.

Curtailment Service Providers typically offer free assessments to determine a facility's eligibility to participate in a DR program. They will provide details regarding program rules and requirements for metering and controls, assess a facility's ability to temporarily reduce electric load, and provide details on payments to be expected for participation in the program. Providers usually offer multiple options for DR to larger facilities and may also install controls or remote monitoring equipment of their own to help ensure compliance with all terms and conditions of a DR contract.

In our opinion this building is not is a good candidate for DR.

8 Project Funding / Incentives

The NJCEP is able to provide the incentive programs described below, and other benefits to ratepayers, because of the Societal Benefits Charge (SBC) Fund. The SBC was created by the State of New Jersey's Electricity Restructuring Law (1999), which requires all customers of investor-owned electric and gas utilities to pay a surcharge on their monthly energy bills. As a customer of a state-regulated electric or gas utility and therefore a contributor to the fund your organization is eligible to participate in the LGEA program and also eligible to receive incentive payment for qualifying energy efficiency measures. Also available through the NJBPU are some alternative financing programs described later in this section. Please refer to Figure 26 for a list of the eligible programs identified for each recommended ECM.

Figure 26 - ECM Incentive Program Eligibility

	Energy Conservation Measure	SmartStart Prescriptive	Direct Install	Existing	Users	Combined Heat & Power and Fuel Cell
ECM 1	Vending Machine Control	Х				

SmartStart is generally well-suited for implementation of individual measures or small group of measures. It provides flexibility to install measures at your own pace using in-house staff or a preferred contractor. Direct Install caters to small to mid-size facilities that can bundle multiple ECMs together. This can greatly simplify participation and may lead to higher incentive amounts, but requires the use of pre-approved contractors. The Pay for Performance (P4P) program is a "whole-building" energy improvement program designed for larger facilities. It requires implementation of multiple measures meeting minimum savings thresholds, as well as use of pre-approved consultants. This facility does not meet all of the criteria for participating in the P4P program based on the measures identified in this study. The Large Energy Users Program (LEUP) is available to New Jersey's largest energy users giving them flexibility to install as little or as many measures, in a single facility or several facilities, with incentives capped based on the entity's annual energy consumption. LEUP applicants can use in-house staff or a preferred contractor.

Generally, the incentive values provided throughout the report assume the SmartStart program is utilized because it provides a consistent basis for comparison of available incentives for various measures, though in many cases incentive amounts may be higher through participation in other programs.

Brief descriptions of all relevant financing and incentive programs are located in the sections below. Further information, including most current program availability, requirements, and incentive levels can be found at: www.njcleanenergy.com/ci.

8.1 SmartStart

Overview

The SmartStart program offers incentives for installing prescriptive and custom energy efficiency measures at your facility. Routinely the program adds, removes or modifies incentives from year to year for various energy efficiency equipment based on market trends and new technologies.

Equipment with Prescriptive Incentives Currently Available:

Electric Chillers
Electric Unitary HVAC
Gas Cooling
Gas Heating
Gas Water Heating
Ground Source Heat Pumps
Lighting

Lighting Controls
Refrigeration Doors
Refrigeration Controls
Refrigerator/Freezer Motors
Food Service Equipment
Variable Frequency Drives

Most equipment sizes and types are served by this program. This program provides an effective mechanism for securing incentives for energy efficiency measures installed individually or as part of a package of energy upgrades.

Incentives

The SmartStart prescriptive incentive program provides fixed incentives for specific energy efficiency measures, whereas the custom SmartStart program provides incentives for more unique or specialized technologies or systems that are not addressed through prescriptive incentive offerings for specific devices.

Since your facility is an existing building, only the retrofit incentives have been applied in this report. Custom measure incentives are calculated at \$0.16/kWh and \$1.60/therm based on estimated annual savings, capped at 50% of the total installed incremental project cost, or a project cost buy down to a one-year payback (whichever is less). Program incentives are capped at \$500,000 per electric account and \$500,000 per natural gas account, per fiscal year.

How to Participate

To participate in the SmartStart program you will need to submit an application for the specific equipment to be installed. Many applications are designed as rebates, although others require application approval prior to installation. Applicants may work with a contractor of their choosing and can also utilize internal personnel, which provides added flexibility to the program. Using internal personnel also helps improve the economics of the ECM by reducing the labor cost that is included in the tables in this report.

Detailed program descriptions, instructions for applying and applications can be found at: www.njcleanenergy.com/SSB.

8.2 Energy Savings Improvement Program

The Energy Savings Improvement Program (ESIP) is an alternate method for New Jersey's government agencies to finance the implementation of energy conservation measures. An ESIP is a type of "performance contract," whereby school districts, counties, municipalities, housing authorities and other public and state entities enter in to contracts to help finance building energy upgrades. This is done in a manner that ensures that annual payments are lower than the savings projected from the ECMs, ensuring that ESIP projects are cash flow positive in year one, and every year thereafter. ESIP provides government agencies in New Jersey with a flexible tool to improve and reduce energy usage with minimal expenditure of new financial resources. NJCEP incentive programs can be leveraged to help further reduce the total project cost of eligible measures.

This LGEA report is the first step to participating in ESIP. Next, you will need to select an approach for implementing the desired ECMs:

- (1) Use an Energy Services Company or "ESCO."
- (2) Use independent engineers and other specialists, or your own qualified staff, to provide and manage the requirements of the program through bonds or lease obligations.
- (3) Use a hybrid approach of the two options described above where the ESCO is utilized for some services and independent engineers, or other specialists or qualified staff, are used to deliver other requirements of the program.

After adopting a resolution with a chosen implementation approach, the development of the Energy Savings Plan (ESP) can begin. The ESP demonstrates that the total project costs of the ECMs are offset by the energy savings over the financing term, not to exceed 15 years. The verified savings will then be used to pay for the financing.

The ESIP approach may not be appropriate for all energy conservation and energy efficiency improvements. Entities should carefully consider all alternatives to develop an approach that best meets their needs. A detailed program descriptions and application can be found at: www.njcleanenergy.com/ESIP.

Please note that ESIP is a program delivered directly by the NJBPU and is not an NJCEP incentive program. As mentioned above, you may utilize NJCEP incentive programs to help further reduce costs when developing the ESP. You should refer to the ESIP guidelines at the link above for further information and guidance on next steps.

9 ENERGY PURCHASING AND PROCUREMENT STRATEGIES

9.1 Retail Electric Supply Options

In 1999, New Jersey State Legislature passed the Electric Discount & Energy Competition Act (EDECA) to restructure the electric power industry in New Jersey. This law deregulated the retail electric markets, allowing all consumers to shop for service from competitive electric suppliers. The intent was to create a more competitive market for electric power supply in New Jersey. As a result, utilities were allowed to charge Cost of Service and customers were given the ability to choose a third party (i.e. non-utility) energy supplier.

Energy deregulation in New Jersey has increased energy buyers' options by separating the function of electricity distribution from that of electricity supply. So, though you may choose a different company from which to buy your electric power, responsibility for your facility's interconnection to the grid and repair to local power distribution will still reside with the traditional utility company serving your region.

If your facility is not purchasing electricity from a third party supplier, consider shopping for a reduced rate from third party electric suppliers. If your facility is purchasing electricity from a third party supplier, review and compare prices at the end of the current contract or every couple years.

A list of third party electric suppliers, who are licensed by the state to provide service in New Jersey, can be found online at: www.state.nj.us/bpu/commercial/shopping.html.

9.2 Retail Natural Gas Supply Options

The natural gas market in New Jersey has also been deregulated. Most customers that remain with the utility for natural gas service pay rates that are market-based and that fluctuate on a monthly basis. The utility provides basic gas supply service (BGSS) to customers who choose not to buy from a third party supplier for natural gas commodity.

A customer's decision about whether to buy natural gas from a retail supplier is typically dependent upon whether a customer seeks budget certainty and/or longer-term rate stability. Customers can secure longer-term fixed prices by signing up for service through a third party retail natural gas supplier. Many larger natural gas customers may seek the assistance of a professional consultant to assist in their procurement process.

If your facility is not purchasing natural gas from a third party supplier, consider shopping for a reduced rate from third party natural gas suppliers. If your facility is purchasing natural gas from a third party supplier, review and compare prices at the end of the current contract or every couple years.

A list of third party natural gas suppliers, who are licensed by the state to provide service in New Jersey, can be found online at: www.state.nj.us/bpu/commercial/shopping.html.





APPENDIX A: EQUIPMENT INVENTORY & RECOMMENDATIONS

Lighting Inventory & Recommendations

-	Existing C	onditions	<u></u>			Proposed Condition	ns						Energy Impact	& Financial A	nalysis				
Location	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Main Lobby	63	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	None	No	63	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Main Lobby	4	LED - Linear Tubes: (2) 2' Lamps	Occupancy Sensor	17	3,058	None	No	4	LED - Linear Tubes: (2) 2' Lamps	Occupancy Sensor	17	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Main Lobby	4	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	3,058	None	No	4	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Main Lobby	11	Exit Signs: LED - 2 W Lamp	None	6	8,760	None	No	11	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Main Lobby	9	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	None	No	9	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Main Lobby	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
167	12	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	None	No	12	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
163	17	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	None	No	17	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
163	2	LED - Linear Tubes: (2) 2' Lamps	Occupancy Sensor	17	3,058	None	No	2	LED - Linear Tubes: (2) 2' Lamps	Occupancy Sensor	17	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
160	28	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	None	No	28	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
155	3	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	None	No	3	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
153	15	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	None	No	15	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Womens Restroom	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Mens Restroom	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Closet	1	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	None	No	1	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
125	36	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	None	No	36	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
125	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
120	30	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	None	No	30	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Corridor 2nd Floor	18	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	None	No	18	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Corridor 2nd Floor	4	LED - Linear Tubes: (2) 2' Lamps	Occupancy Sensor	17	3,058	None	No	4	LED - Linear Tubes: (2) 2' Lamps	Occupancy Sensor	17	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Corridor 2nd Floor	10	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	None	No	10	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Corridor 2nd Floor	4	Exit Signs: LED - 2 W Lamp	None	6	8,760	None	No	4	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Corridor 2nd Floor	3	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	3	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
267	13	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	None	No	13	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Restroom	2	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	None	No	2	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00





	Existing C	Conditions				Proposed Condition	ıs						Energy Impact	& Financial Ar	nalysis				
Location	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Restroom	1	LED - Linear Tubes: (1) 2' Lamp	Occupancy Sensor	9	3,058	None	No	1	LED - Linear Tubes: (1) 2' Lamp	Occupancy Sensor	9	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
264	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
263F	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
263F	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
263D	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
263C	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
263B	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
263A	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
260	3	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	None	No	3	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
253	21	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	21	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
258	3	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	None	No	3	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
254	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Womens Restroom	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
244	8	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	8	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
246	1	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	None	No	1	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
242	10	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	10	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
242A1	4	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	None	No	4	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Mens Restroom	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
239	1	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	None	No	1	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
231	13	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	None	No	13	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
228	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
224	3	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	None	No	3	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
225	13	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	13	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
222	3	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	None	No	3	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
218	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00





	Existing C	Conditions				Proposed Condition	ns						Energy Impact	& Financial A	nalysis				
Location	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
219	15	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	None	No	15	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
217	15	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	None	No	15	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
205	2	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	None	No	2	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
203	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Corridor 3rd Floor	10	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	None	No	10	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Corridor 3rd Floor	13	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	None	No	13	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Corridor 3rd Floor	15	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	15	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Corridor 3rd Floor	15	Exit Signs: LED - 2 W Lamp	None	6	8,760	None	No	15	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
313	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
315	6	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	6	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
317	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
319	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
321	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
323	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
325	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
327	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
329	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
331	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
326	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
324	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
322	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
333	7	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	7	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
333A	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
333B	1	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	None	No	1	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
336	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00





	Existing C	onditions				Proposed Conditio	ns						Energy Impact	& Financial A	nalysis				
Location	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
338	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
339	1	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	None	No	1	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Mens Restroom	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Womens Restroom	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
369	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
371	6	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	6	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
373	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
375	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
374	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
377	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
379	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
378	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
381	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
380	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
383	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
385	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
387	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
391	8	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	8	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
398	4	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	None	No	4	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
398	4	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	None	No	4	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
353	6	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	None	No	6	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
357	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
356	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
358	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
341	8	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	8	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00





	Existing C	Conditions				Proposed Condition	ns						Energy Impact	& Financial A	nalysis				
Location	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
361	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
362	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Corridor 4th Floor	10	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	None	No	10	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Corridor 4th Floor	9	Exit Signs: LED - 2 W Lamp	None	6	8,760	None	No	9	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Corridor 4th Floor	14	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	None	No	14	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Corridor 4th Floor	18	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	18	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Office Graduate School	13	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	13	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Office Graduate School	8	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	None	No	8	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
451	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
449	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
448	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
446	2	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	None	No	2	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
444	2	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	None	No	2	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
443	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
441	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
458	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
461	6	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	6	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
463	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
462	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
465	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
467	1	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	1	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
469	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
471	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
473	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
475	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00





	Existing C	onditions				Proposed Condition	ns						Energy Impac	& Financial A	nalysis				
Location	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
474	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
476	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
477	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
479	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
481	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
483	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
482	6	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	None	No	6	LED Screw-In Lamps: LED - 2 Pin - 9W	Occupancy Sensor	9	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
482	3	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	None	No	3	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
487C	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	4	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
487B	6	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	6	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
487A	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	None	No	2	LED - Linear Tubes: (6) 2' Lamps	Occupancy Sensor	51	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Stairwells	26	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	None	No	26	LED - Linear Tubes: (1) 4' Lamp	Occupancy Sensor	15	3,058	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Exterior Perimeter	16	LED Screw-In Lamps: LED - 11W	DDC	11	4,380	None	No	16	LED Screw-In Lamps: LED - 11W	DDC	11	4,380	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00





Motor Inventory & Recommendations

		Existing (Conditions					Proposed	Conditions		Energy Impact	t & Financial A	nalysis				
Location	Area(s)/System(s) Served	Motor Quantity	Motor Application		Full Load Efficiency		Annual Operating Hours	Install High Efficiency Motors?				Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Mechanical Room	Partridge Hall	2	Supply Fan	7.5	91.7%	Yes	3,391	No	91.7%	No	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Mechanical Room	Partridge Hall	1	Return Fan	5.0	89.5%	Yes	2,745	No	89.5%	No	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Mechanical Room	Partridge Hall	2	Condenser Water Pump	0.8	77.0%	No	2,745	No	77.0%	No	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Mechanical Room	Partridge Hall	2	Heating Hot Water Pump	7.5	91.0%	Yes	3,391	No	91.0%	No	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Mechanical Room	Partridge Hall	2	Chilled Water Pump	10.0	91.7%	Yes	3,391	No	91.7%	No	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Rooftop	Partridge Hall	1	Supply Fan	10.0	91.7%	Yes	3,391	No	91.7%	No	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Rooftop	Partridge Hall	1	Supply Fan	10.0	91.7%	Yes	3,391	No	91.7%	No	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Rooftop	Partridge Hall	2	Exhaust Fan	0.2	85.5%	No	2,745	No	85.5%	No	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00

Electric HVAC Inventory & Recommendations

		Existing (Conditions			Proposed	Condition	s					Energy Impac	t & Financial A	nalysis				
Location	Area(s)/System(s) Served	System Quantity	System Type		Capacity per Unit			System Type	Capacity per Unit	Cooling Mode Efficiency (SEER/EER)	,	Install Dual Enthalpy Economizer?		Total Annual kWh Savings	MMRtu	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Rooftop	Partridge Hall	3	Split-System Air-Source HP	3.00	36.00	No						No	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Rooftop	Partridge Hall	1	Split-System Air-Source HP	2.00	27.00	No						No	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Ground Floor	Partridge Hall	1	Split-System Air-Source HP	2.50	33.00	No						No	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00





Electric Chiller Inventory & Recommendations

		Existing (Conditions		Proposed	Condition	S				Energy Impact	& Financial Ar	nalysis				
Location		Chiller Quantity	System Type				System Type	Capacity	Full Load Efficiency (kW/Ton)	Efficiency	kW Savings	Total Annual	MMRfu	Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years
Central Plant	Partridge Hall	1	Water-Cooled Centrifugal Chiller	196.00	No		_				0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00

Fuel Heating Inventory & Recommendations

Existing Conditions					Proposed Conditions					Energy Impact & Financial Analysis							
Location	Area(s)/System(s) Served	System Quantity	System Type	•		•		Output Capacity per Unit (MBh)		Heating Efficiency Units	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Central Plant	Partridge Hall	1	Forced Draft Steam Boiler	4,000.00	No						0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00

Demand Control Ventilation Recommendations

		Recommendation Inputs					Energy Impact & Financial Analysis						
Location	Area(s)/System(s) Affected	Number of Zones	Cooling Capacity of Controlled System (Tons)	Electric Heating Capacity of Controlled System (kBtu/hr)	Output Heating Capacity of Controlled System (MBh)	Ton-Hr	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years		
Building	Throughout Building	25	38.00		550.00	2,584	36.0	\$1,395.66	\$33,985.50	\$0.00	24.35		

DHW Inventory & Recommendations

	Existing C	Conditions	Proposed Conditions				Energy Impact & Financial Analysis									
Location	Area(s)/System(s) Served	System Quantity	System Type	Replace?	System Quantity	System Type	Fuel Type	System Efficiency		Total Peak kW Savings	Total Annual	l MMBtu	Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years
Mechanical Room	Partridge Hall	1	Indirect System	No						0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00





Plug Load Inventory

	Existing (Conditions		
Location	Quantity	Equipment Description	Energy Rate (W)	ENERGY STAR Qualified?
Partridge Hall	87	Desktop and LCD Monitor	191.0	Yes
Partridge Hall	19	Printer	515.0	Yes
Partridge Hall	7	Copier	515.0	Yes
Partridge Hall	4	Microwave	1,000.0	Yes
Partridge Hall	3	Small Freezer	500.0	Yes
Partridge Hall	7	Television	375.0	Yes
Partridge Hall	1	Dryer	5,750.0	Yes
Partridge Hall	1	Washing Machine	900.0	Yes
Partridge Hall	1	Fumehood	2,400.0	Yes
Partridge Hall	3	Coffee Maker	400.0	Yes

Vending Machine Inventory & Recommendations

	Existing (Conditions	Proposed Conditions	Energy Impact & Financial Analysis									
Location	Quantity	Vending Machine Type	Install Controls?	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years			
Main Lobby	2	Refrigerated	Yes	0.00	3,224	0.0	\$541.58	\$460.00	\$0.00	0.85			
Main Lobby	2	Non-Refrigerated	Yes	0.00	685	0.0	\$115.09	\$460.00	\$0.00	4.00			





APPENDIX B: ENERGY STAR® STATEMENT OF ENERGY PERFORMANCE



ENERGY STAR[®] Statement of Energy Performance

Montclair State University Campus (Buildings 1-41)

Primary Property Type: College/University Gross Floor Area (ft³): 2,925,896

Built: 1908

ENERGY STAR® Score¹

For Year Ending: October 31, 2016 Date Generated: October 10, 2017

1. The ENERGY STAR score is a 1-100 assessment of a building's energy efficiency as compared with similar buildings nationwide, adjusting for climate and business activity.

Property & Contact Information

Property Address

Montclair State University Campus (Buildings 1-41) 1 Normal Avenue Montclair, New Jersey 07043

Property ID: 6069294

Property Owner Montclair Statet University

1 Normal Avenue Montclair, NJ 07043 973-655-3244

Primary Contact Ana Pinto 1 Normal Avenue Montclair, NJ 07043

973-655-3244 pintoa@montclair.edu

Energy Consumption and Energy Use Intensity (EUI)

Annual Energy by Fuel 172.3 kBtu/ft² District Chilled Water - 81,507,530 (16%) Other (kBtu)

District Steam (kBtu) 223,798,259 (44%) Electric - Grid (kBtu) 161,334,839 (32%) National Median Site EUI (kBtu/ft²) National Median Source EUI (kBtu/ft²) % Diff from National Median Source EUI

National Median Comparison

147.6 262.6 17%

Source EUI 306.4 kBtu/ft2

Natural Gas (kBtu) 37,406,141 (7%)

Annual Emissions

Greenhouse Gas Emissions (Metric Tons CO2e/year)

N/A

Signature & Stamp of Verifying Professional

	700.00	and is true and correct to the best of my knowledge
Signature:	Date:	-
Licensed Professional		

Professional Engineer Stamp (if applicable)