

Local Government Energy Audit: Energy Audit Report





Copyright ©2017 TRC Energy Services. All rights reserved.

Reproduction or distribution of the whole, or any part of the contents of this document without written permission of TRC is prohibited. Neither TRC nor any of its employees makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any data, information, method, product or process disclosed in this document, or represents that its use will not infringe upon any privately-owned rights, including but not limited to, patents, trademarks or copyrights.

Tony Canale Park

Sycamore Road

Egg Harbor Township, NJ 08234

Egg Harbor Township

March 1, 2018

Draft Report by:

TRC Energy Services

Disclaimer

The intent of this energy analysis report is to identify energy savings opportunities and recommend upgrades to the facility's energy using equipment and systems. Approximate saving are included in this report to help make decisions about reducing energy use at the facility. This report, however, is not intended to serve as a detailed engineering design document. Further design and analysis may be necessary in order to implement some of the measures recommended in this report.

The energy conservation measures and estimates of energy savings have been reviewed for technical accuracy. However, estimates of final energy savings are not guaranteed, because final savings may depend on behavioral factors and other uncontrollable variables. TRC Energy Services and New Jersey Board of Public Utilities (NJBPU) shall in no event be liable should the actual energy savings vary.

Estimated installation costs are based on TRC's experience at similar facilities, pricing from local contractors and vendors, and/or cost estimates from RS Means. The owner of the facility is encouraged to independently confirm these cost estimates and to obtain multiple estimates when considering measure installations. Since actual installed costs can vary widely for certain measures and conditions, TRC and NJBPU do not guarantee installed cost estimates and shall in no event be held liable should actual installed costs vary from estimates.

New Jersey's Clean Energy Program (NJCEP) incentive values provided in this report are estimates based on program information available at the time of the report. Incentive levels are not guaranteed. The NJBPU reserves the right to extend, modify, or terminate programs without prior notice. The owner of the facility should review available program incentives and eligibility requirements prior to selecting and installing any energy conservation measures.





Table of Contents

1	Execu	tive Summary	6				
	1.1 1.2	Facility Summary Your Cost Reduction Opportunities					
	Ene	rgy Conservation Measures	6				
		rgy Efficient Practices					
	On-S	Site Generation Measures	8				
	1.3	Implementation Planning	8				
2	Facilit	y Information and Existing Conditions	10				
	2.1	Project Contacts	10				
	2.2	General Site Information					
	2.3	Building Occupancy					
	2.4 2.5	Building Envelope On-Site Generation					
	2.6	Energy-Using Systems					
		ting System					
	_	tric HVAC					
		nestic Water Heating System					
	Buil	ding Plug Load					
	2.7	Water-Using Systems					
3	Site Energy Use and Costs						
	3.1	Total Cost of Energy					
	3.2	Electricity Usage					
	3.3 3.4	Benchmarking Energy End-Use Breakdown					
4		y Conservation Measures					
4		•					
	4.1 4.1.1	Recommended ECMsLighting Upgrades					
		1 1: Retrofit Fixtures with LED Lamps					
	4.1.2	HVAC System Upgrades	19				
	ECM	1 2: Install Pipe Insulation	20				
	4.1.3	Domestic Hot Water Heating System Upgrades	20				
	ECN	1 3: Install Low-Flow DHW Devices	21				
	4.2	ECMs Evaluated But Not Recommended	21				
	Inst	all LED Fixtures	22				
5		y Efficient Practices					
	_	uce Air Leakage					
	Dev	elop a Lighting Maintenance Schedule	23				
	Clea	n Evaporator/Condenser Coils on AC Systems	23				





	Cle	ean and/or Replace HVAC Filters	23
	Pe	erform Proper Water Heater Maintenance	23
	Wa	ater Conservation	24
6	On-S	Site Generation Measures	25
	6.1	Photovoltaic	25
	6.2	Combined Heat and Power	26
7	Dem	nand Response	27
8	Proje	ect Funding / Incentives	28
	8.1	SmartStart	28
	8.2	Direct Install	29
	8.3	Energy Savings Improvement Program	30
9	Ener	gy Purchasing and Procurement Strategies	31
	9.1	Retail Electric Supply Options	31
	9.2	Retail Natural Gas Supply Options	31

Appendix A: Equipment Inventory & Recommendations





Table of Figures

Figure 1 – Previous 12 Month Utility Costs	6
Figure 2 – Potential Post-Implementation Costs (Evaluated Project Measures)	7
Figure 3 – Potential Post-Implementation Costs (High Priority Measures)	7
Figure 4 – Summary of Energy Reduction Opportunities	7
Figure 5 – Project Contacts	10
Figure 6 - Building Schedule	10
Figure 7 - Utility Summary	14
Figure 8 - Energy Cost Breakdown	14
Figure 9 - Graph of 12 Months Electric Usage & Demand	15
Figure 10 - Table of 12 Months Electric Usage & Demand	15
Figure 11 - Energy Use Intensity Comparison — Existing Conditions	16
Figure 12 - Energy Use Intensity Comparison – Following Installation of Recommended Measures	16
Figure 13 - Energy Balance (% and kBtu/SF)	17
Figure 14 – Summary of Recommended ECMs	18
Figure 15 – Summary of Lighting Upgrade ECMs	19
Figure 16 - Summary of HVAC System Improvement ECMs	19
Figure 17 - Summary of Domestic Water Heating ECMs	20
Figure 18 – Summary of Measures Evaluated, But Not Recommended	21
Figure 19 - Photovoltaic Screening	25
Figure 20 - Combined Heat and Power Screening	26
Figure 21 - ECM Incentive Program Eligibility	28





I EXECUTIVE SUMMARY

The New Jersey Board of Public Utilities (NJBPU) has sponsored this Local Government Energy Audit (LGEA) Report for Egg Harbor Township.

The goal of an LGEA report is to provide you with information on how your facility uses energy, identify energy conservation measures (ECMs) that can reduce your energy use, and provide information and assistance to help facilities implement ECMs. The LGEA report also contains valuable information on financial incentives from New Jersey's Clean Energy Program (NJCEP) for implementing ECMs.

This study was conducted by TRC Energy Services, as part of a comprehensive effort to assist New Jersey local governments in controlling energy costs and protecting our environment by offering a wide range of energy management options and advice.

I.I Facility Summary

Egg Harbor Township Tony Canale Park has a 1,000 square foot building comprised of restrooms, storage space and an attic. The park has the most use in the spring to summer. There is an outdoor amphitheater which is used for concerts and movies. The park is used for activities about 4 nights a week, averaging about 100 people. The duration of use varies based on activity. A thorough description of the facility and our observations are located in Section 2.

1.2 Your Cost Reduction Opportunities

Energy Conservation Measures

TRC Energy Services evaluated 4 measures and recommends 3 measures which together represent an opportunity for Egg Harbor Township to reduce annual energy costs by roughly \$139 and annual greenhouse gas emissions by 597 lbs CO₂e. We estimate that if all measures were implemented as recommended, the project would pay for itself in roughly 7.9 years. The breakdown of existing and potential utility costs after project implementation are illustrated in the following figures. Together these measures represent an opportunity to reduce the site's annual energy costs by 2%.

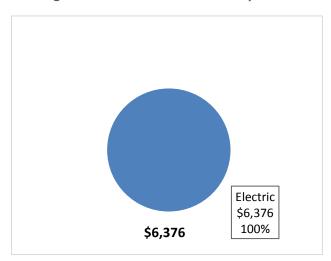


Figure I - Previous 12 Month Utility Costs





Figure 2 – Potential Post-Implementation Costs (Evaluated Project Measures)

Figure 3 – Potential Post-Implementation Costs (High Priority Measures)



A detailed description of Egg Harbor Township's existing energy use can be found in Section 3 "Site Energy Use and Costs".

Estimates of the total cost, energy savings, and financial incentives for the proposed energy efficient upgrades are summarized below in Figure 4. A brief description of each category can be found below and a description of savings opportunities can be found in Section 4, "Energy Conservation Measures".

Figure 4 – Summary of Energy Reduction Opportunities

	Energy Conservation Measure	Recommend?	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	_	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)		CO ₂ e Emissions Reduction (Ibs)
	Lighting Upgrades		6,471	0.4	0.0	\$1,513.41	\$60,800.51	\$590.00	\$60,210.51	39.8	6,516
	Install LED Fixtures	No	6,117	0.0	0.0	\$1,430.66	\$59,805.44	\$390.00	\$59,415.44	41.5	6,160
ECM 1	Retrofit Fixtures with LED Lamps	Yes	354	0.4	0.0	\$82.75	\$995.07	\$200.00	\$795.07	9.6	356
	HVAC System Improvements		109	0.0	0.0	\$25.49	\$261.00	\$0.00	\$261.00	10.2	110
ECM 2	Install Pipe Insulation	Yes	109	0.0	0.0	\$25.49	\$261.00	\$0.00	\$261.00	10.2	110
	Domestic Water Heating Upgrade		130	0.0	0.0	\$30.37	\$43.02	\$0.00	\$43.02	1.4	131
ECM 3	Install Low-Flow Domestic Hot Water Devices	Yes	130	0.0	0.0	\$30.37	\$43.02	\$0.00	\$43.02	1.4	131
	TOTALS		6,710	0.4	0.0	\$1,569.27	\$61,104.53	\$590.00	\$60,514.53	38.6	6,756

^{* -} All incentives presented in this table are based on NJ Smart Start Building equipment incentives and assume proposed equipment meets minimum performance criteria for that program.

** - Simple Payback Period is based on net measure costs (i.e. after incentives).

TOTALS (High Priority Measures)

593

0.4

0.0

\$138.61

\$1,299.09

\$200.00

\$1,099.09

7.9

597

Lighting Upgrades generally involve the replacement of existing lighting components such as lamps and ballasts (or the entire fixture) with higher efficiency lighting components. These measure save energy by reducing the power used by the lighting components due to improved electrical efficiency.

HVAC System Improvements generally involve the installation of automated controls to reduce heating and cooling demand during periods of reduced demand. These measures could encompass changing temperature setpoints, using outside air for free cooling, or limiting excessive outside air during extreme outdoor air temperature conditions. These measures save energy by reducing the demand on HVAC systems and the amount of time systems operate.





Domestic Hot Water upgrade measures generally involve replacing older inefficient domestic water heating systems with modern energy efficient systems. New domestic hot water heating systems can provide equivalent, or greater, water heating capacity compared to older systems at a reduced energy cost. These measures save energy by reducing the fuel used for domestic hot water heating due to improved heating efficiency or reducing standby losses.

Energy Efficient Practices

TRC Energy Services also identified 6 low cost or no cost energy efficient practices. A facility's energy performance can be significantly improved by employing certain behavioral or operational adjustments and by performing better routine maintenance on building systems. These practices can extend equipment lifetime, improve occupant comfort, provide better health and safety, as well as reduce annual energy and O&M costs. Potential opportunities identified at Egg Harbor Township include:

- Reduce Air Leakage
- Develop a Lighting Maintenance Schedule
- Clean Evaporator/Condenser Coils on AC Systems
- Clean and/or Replace HVAC Filters
- Perform Proper Water Heater Maintenance
- Water Conservation

For details on these Energy Efficient Practices, please refer to Section 5.

On-Site Generation Measures

TRC Energy Services evaluated the potential for installing on-site generation for Egg Harbor Township. Based on the configuration of the site and its loads there is a low potential for installing any PV and combined heat and power self-generation measures.

For details on our evaluation and on-site generation potential, please refer to Section 6.

1.3 Implementation Planning

To realize the energy savings from the ECMs listed in this report, a project implementation plan must be developed. Available capital must be considered and decisions need to be made whether it is best to pursue individual ECMs separately, groups of ECMs, or a comprehensive approach where all ECMs are implemented together, possibly in conjunction with other facility upgrades or improvements.

Rebates, incentives, and financing are available from NJCEP, as well as other sources, to help reduce the costs associated with the implementation of energy efficiency projects. Prior to implementing any measure, please review the relevant incentive program guidelines before proceeding. This is important because in most cases you will need to submit applications for the incentives prior to purchasing materials or commencing with installation.

The ECMs outlined in this report may qualify under the following program(s):

- SmartStart (SS)
- Direct Install (DI)

For facilities wanting to pursue only selected individual measures (or planning to phase implementation of selected measures over multiple years), incentives are available through the SmartStart program. To participate in this program you may utilize internal resources, or an outside firm or contractor, to do the final design of the ECM(s) and do the installation. Program pre-approval is required for some SS incentives,





so only after receiving pre-approval should you proceed with ECM installation. The incentive estimates listed above in Figure 4 are based on the SS program. More details on this program and others are available in Section 8.

This facility may also qualify for the Direct Install program which can provide turnkey installation of multiple measures, through an authorized network of participating contractors. This program can provide substantially higher incentives that SmartStart, up to 70% of the cost of selected measures, although measure eligibility will have to be assessed and be verified by the designated DI contractor and, in most cases, they will perform the installation work.

For larger facilities with limited capital availability to implement ECMs, project financing may be available through the Energy Savings Improvement Program (ESIP). Supported directly by the NJBPU, ESIP provides government agencies with project development, design, and implementation support services, as well as, attractive financing for implementing ECMs. An LGEA report (or other approved energy audit) is required for participation in ESIP. Please refer to Section 8.3 for additional information on the ESIP Program.

The Demand Response Energy Aggregator is a (non-NJCEP) program designed to reduce electric loads at commercial facilities, when wholesale electricity prices are high or when the reliability of the electric grid is threatened due to peak power demand. Demand Response (DR) service providers (a.k.a. Curtailment Service Providers) are registered with PJM, the independent system operator (ISO) for mid-Atlantic state region that is charged with maintaining electric grid reliability. By enabling grid operators to call upon commercial facilities to reduce their electric usage during times of peak demand, the grid is made more reliable and overall transmission costs are reduced for all ratepayers. Curtailment Service Providers provide regular payments to medium and large consumers of electric power for their participation in DR programs. Program participation is voluntary and facilities receive payments whether or not they are called upon to curtail their load during times of peak demand. Refer to Section 7 for additional information on this program.

Additional information on relevant incentive programs is located in Section 8. You may also check the following website for more details: www.njcleanenergy.com/ci





2 FACILITY INFORMATION AND EXISTING CONDITIONS

2.1 Project Contacts

Figure 5 - Project Contacts

Name	Role	E-Mail	Phone #				
Customer							
Matthew von der Hayden	Deputy Administrator	MVonDerHayden@ehtgov.org	609-926-4044				
Sam Gioconda	Division Manager, Buildings & Grounds	sgioconda@ehtgov.org	609-926-3838				
TRC Energy Services							
Aimee Lalonde	Auditor	Alalonde@trcsolutions.com	732-855-0033				

2.2 General Site Information

On September 29, 2017, TRC Energy Services performed an energy audit for this site at Egg Harbor Township located in Egg Harbor Township, NJ. TRC Energy Services' team met with Matt & Sam to review the facility operations and help focus our investigation on specific energy-using systems.

Egg Harbor Township Tony Canale Park has a 1,000 square foot building comprised of restrooms, storage space and an attic. There is an outdoor amphitheater which is used for concerts and movies. The duration of use varies based on activity. The building was constructed in 2008 and is in good condition. There is a newer restroom building at the park which is in good condition.

2.3 Building Occupancy

The park has the most use in the spring to summer. The park is used for activities about 4 nights a week averaging about 100 people. The typical schedule is presented in the table below.

Figure 6 - Building Schedule

Building Name	Weekday/Weekend	Operating Schedule		
Egg Harbor Township	Weekday	Infrequent Use		
Egg Harbor Township	Weekend	Infrequent Use		

2.4 Building Envelope

The building at Tony Canale Park is constructed of concrete block. The building has a pitched roof and appears to be in good condition. The exterior doors are constructed of aluminum and in good condition.

2.5 On-Site Generation

Tony Canale Park does not have any on-site electric generation capacity.


2.6 Energy-Using Systems

Lighting System

Lighting at the original building is provided by linear 32 Watt fluorescent T8 lamps with electronic ballasts. The lighting at the new restroom building are linear LED fixtures. The light fixtures are manually controlled via wall switches.





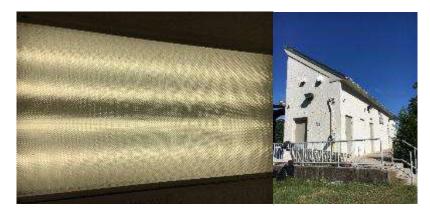

Building Lighting

The field lights are tall pole mounted stadium style lighting that include 1500W and 100W metal halide lamps and ballasts. The parking lot pole mounted lights include 150W and 100W metal halide lamps and ballasts. Upgrading these fixtures was of interest to the facility, however, due to low usage, it is not cost effective to upgrade these to LED technology on the basis of energy savings.



Site Lighting

Please see **Appendix A: Equipment Inventory & Recommendations** for an inventory of the facility's lighting equipment.

Electric HVAC

The building is conditioned by an air conditioning unit equipped with an electric forced air furnace and a cooling coil served by an outdoor condensing unit. The indoor unit is high efficiency and the outdoor unit is of low efficiency. However, due to the low use of this equipment there is limited potential for energy savings through replacement. We recommend replacing the outdoor condensing unit with a high efficiency unit of the same capacity once it reaches the end of its useful life. In the meantime, we recommend cleaning coils on this split AC system as part of general good maintenance practice.







Electric HVAC Equipment

Please see **Appendix A: Equipment Inventory & Recommendations** for an inventory of the facility's air conditioning equipment.

Domestic Water Heating System

The domestic hot water heating system for the original building consists of an electric storage tank water heater with an input rating of 4.5 kW. The water heater has a 40 gallon storage tank and is in good condition. The unit is located in the attic, and the domestic hot water piping was noted to be uninsulated. This provides an opportunity for energy savings by installing pipe insulation. Hot water is provided to hand washing sinks in the restrooms which are currently fit with higher flow devices. There is an opportunity for energy savings by replacing these with low flow aerators.



Domestic Water Heating Equipment (Main)

The domestic hot water heating system for the new restroom building consists of an electric storage tank water heater with an input rating of 1.7 kW. The water heater has a 10 gallon storage tank and is in good condition.







Domestic Water Heating Equipment (Restroom)

Please see **Appendix A: Equipment Inventory & Recommendations** for an inventory of the facility's domestic hot water equipment.

Building Plug Load

The plug loads at this park include the removable entertainment equipment that is required for activities such as the concerts and movies. The actual load and use of this equipment is unknown and estimated for the purposes of this report.

Please see **Appendix A: Equipment Inventory & Recommendations** for an inventory of the facility's plug load equipment.

2.7 Water-Using Systems

The washing sinks in the restrooms which are currently fit with higher flow devices. There is an opportunity for energy savings by replacing these with low flow aerators.





3 SITE ENERGY USE AND COSTS

Utility data for electricity was analyzed to identify opportunities for savings. In addition, data for electricity was evaluated to determine the annual energy performance metrics for the building in energy cost per square foot and energy usage per square foot. These metrics are an estimate of the relative energy efficiency of this building. There are a number of factors that could cause the energy use of this building to vary from the "typical" energy usage profile for facilities with similar characteristics. Local weather conditions, building age and insulation levels, equipment efficiency, daily occupancy hours, changes in occupancy throughout the year, equipment operating hours, and energy efficient behavior of occupants all contribute to benchmarking scores. Please refer to the Benchmarking section within Section 3.3 for additional information.

3.1 Total Cost of Energy

The following energy consumption and cost data is based on the last 12-month period of utility billing data that was provided for each utility. A profile of the annual energy consumption and energy cost of the facility was developed from this information.

Figure 7 - Utility Summary

Utility Summary for Egg Harbor Township							
Fuel	Usage	Cost					
Electricity	27,260 kWh	\$6,376					
Total	\$6,376						

The current annual energy cost for this facility is \$6,376 as shown in the chart below.

Electric \$6,376

\$6,376

100%

Figure 8 - Energy Cost Breakdown





3.2 Electricity Usage

Electricity is provided by Atlantic City Electric. The average electric cost over the past 12 months was \$0.234/kWh, which is the blended rate that includes energy supply, distribution, and other charges. This rate is used throughout the analyses in this report to assess energy costs and savings. The facility pays electrical demand costs. The monthly electricity consumption and peak demand are shown in the chart below.

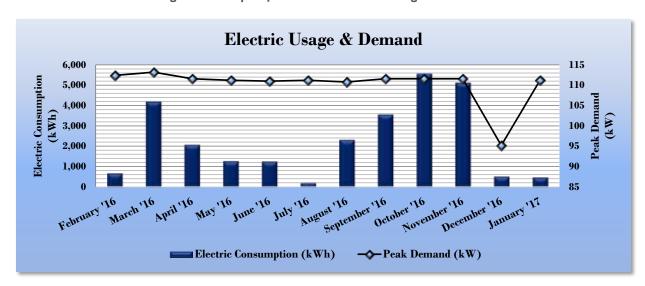


Figure 9 - Graph of 12 Months Electric Usage & Demand

Figure 10 - Table of 12 Months Electric Usage & Demand

	Electric Billing Data for Egg Harbor Township											
Period Ending	Days in Period	Electric Usage (kWh)	Demand (kW)	Demand Cost	Total Electric Cost	TRC Estimated Usage?						
3/14/16	33	680	112	\$151	\$259	No						
4/12/16	29	4,200	113	\$168	\$808	No						
5/10/16	28	2,080	112	\$150	\$470	No						
6/10/16	31	1,280	111	\$158	\$360	No						
7/13/16	33	1,260	111	\$191	\$402	Yes						
8/12/16	30	200	111	\$182	\$225	No						
9/12/16	31	2,320	111	\$200	\$579	No						
10/12/16	30	3,560	112	\$212	\$784	No						
11/9/16	28	5,560	112	\$162	\$1,018	No						
12/9/16	30	5,120	112	\$174	\$963	No						
1/13/17	35	520	95	\$163	\$256	No						
2/9/17	27	480	111	\$168	\$252	No						
Totals	365	27,260	113.2	\$2,080	\$6,376	1						
Annual	365	27,260	113.2	\$2,080	\$6,376							





3.3 Benchmarking

This facility was benchmarked using *Portfolio Manager*, an online tool created and managed by the U.S. Environmental Protection Agency (EPA) through the ENERGY STAR™ program. Portfolio Manager analyzes your building's consumption data, cost information, and operational use details and then compares its performance against a national median for similar buildings of its type. Metrics provided by this analysis are Energy Use Intensity (EUI) and an ENERGY STAR Score for select building types.

Energy Use Intensity is a measure of a facility's energy consumption per square foot, and it is the standard metric for comparing buildings' energy performance. Comparing the EUI of a building with the national median EUI for that building type illustrates whether that building uses more or less energy than similar buildings of its type on a square foot basis. EUI is presented in terms of "site energy" and "source energy". Site energy is the amount of fuel and electricity consumed by a building as reflected in utility bills. Source energy includes fuel consumed to generate electricity consumed at the site, factoring in electric production and distribution losses for the region.

Figure 11 - Energy Use Intensity Comparison - Existing Conditions

Energy Use Intensity Comparison - Existing Conditions							
	Egg Harbor Township	National Median					
	Egg Harbor Township	Building Type: Rec./Entertainment/Parks					
Source Energy Use Intensity (kBtu/ft²)	292.1	96.8					
Site Energy Use Intensity (kBtu/ft²)	93.0	41.2					

Implementation of all recommended measures in this report would improve the building's estimated EUI significantly, as shown in the Table below:

Figure 12 - Energy Use Intensity Comparison - Following Installation of Recommended Measures

Energy Use Intensity Comparison - Following Installation of Recommended Measures							
	Egg Harbor Township	National Median					
	Egg Harbor Township	Building Type: Rec./Entertainment/Parks					
Source Energy Use Intensity (kBtu/ft²)	285.7	96.8					
Site Energy Use Intensity (kBtu/ft²)	91.0	41.2					

Many types of commercial buildings are also eligible to receive an ENERGY STAR™ score. This score is a percentile ranking from 1 to 100. It compares your building's energy performance to similar buildings nationwide. A score of 50 represents median energy performance, while a score of 75 means your building performs better than 75 percent of all similar buildings nationwide and may be eligible for ENERGY STAR® certification. Your building is not is one of the building categories that are eligible to receive a score.





3.4 Energy End-Use Breakdown

In order to provide a complete overview of energy consumption across building systems, an energy balance was performed at this facility. An energy balance utilizes standard practice engineering methods to evaluate all components of the various electric and fuel-fired systems found in a building to determine their proportional contribution to overall building energy usage. This chart of energy end uses highlights the relative contribution of each equipment category to total energy usage. This can help determine where the greatest benefits might be found from energy efficiency measures.

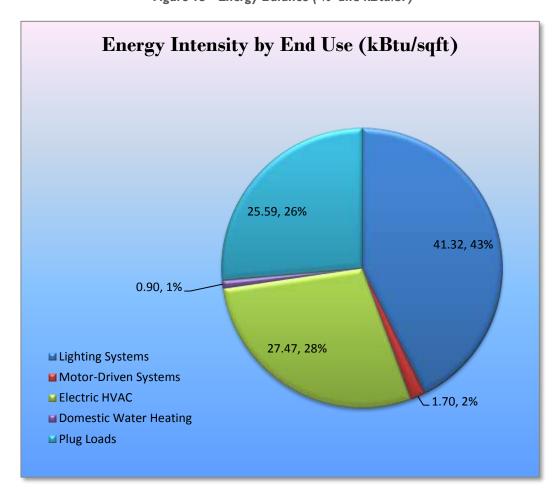


Figure 13 - Energy Balance (% and kBtu/SF)





ENERGY CONSERVATION MEASURES

Level of Analysis

The goal of this audit report is to identify potential energy efficiency opportunities, help prioritize specific measures for implementation, and provide information to the Egg Harbor Township regarding financial incentives for which they may qualify to implement the recommended measures. For this audit report, most measures have received only a preliminary analysis of feasibility which identifies expected ranges of savings and costs. This level of analysis is usually considered sufficient to demonstrate project costeffectiveness and help prioritize energy measures. Savings are based on the New Jersey Clean Energy Program Protocols to Measure Resource Savings dated June 29, 2016, approved by the New Jersey Board of Public Utilities. Further analysis or investigation may be required to calculate more precise savings based on specific circumstances. A higher level of investigation may be necessary to support any custom SmartStart or Pay for Performance, or Direct Install incentive applications. Financial incentives for the ECMs identified in this report have been calculated based the NJCEP prescriptive SmartStart program. Some measures and proposed upgrade projects may be eligible for higher incentives than those shown below through other NJCEP programs as described in Section 8.

The following sections describe the evaluated measures.

4.1 Recommended ECMs

The measures below have been evaluated by the auditor and are recommended for implementation at the facility.

Annual Annua Annual Simple CO₂e **Estimated Estimated Estimated Energy Cost** Electric Demand **Fuel** Payback Emissions **Energy Conservation Measure** Install Cost Incentive **Net Cost** Period Savings Savings Savings Savings Reduction (\$) (\$)* (\$) (kWh) (kW) (MMBtu) (\$) (yrs)** (lbs) 354 0.4 0.0 \$82.75 \$995.07 \$200.00 \$795.07 9.6 **Lighting Upgrades** 356 ECM 1 Retrofit Fixtures with LED Lamps 356 354 0.4 0.0 \$82.75 \$995.07 \$200.00 \$795.07 9.6 **HVAC System Improvements** 0.0 0.0 \$25.49 \$261.00 \$0.00 \$261.00 10.2 110 ECM 2 Install Pipe Insulation 109 0.0 0.0 \$25.49 \$261.00 \$0.00 \$261.00 10.2 110 130 0.0 0.0 \$30.37 \$43.02 \$0.00 \$43.02 1.4 131 ECM 3 Install Low-Flow Domestic Hot Water Devices 0.0 0.0 \$30.37 \$0.00 \$43.02 131

0.4

0.0

\$138.61

\$1,299.09

\$1.099.09

597

Figure 14 - Summary of Recommended ECMs

TOTALS

4.1.1 Lighting Upgrades

Recommended upgrades to existing lighting fixtures are summarized in Figure 15 below.

⁵⁹³ * - All incentives presented in this table are based on NJ Smart Start Building equipment incentives and assume proposed equipment meets minimum performance criteria for that program.

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).





Figure 15 - Summary of Lighting Upgrade ECMs

	Energy Conservation Measure		Peak Demand Savings (kW)		_	Estimated Install Cost (\$)	Estimated Incentive (\$)	Estimated Net Cost (\$)		CO ₂ e Emissions Reduction (lbs)
Lighting Upgrades			0.4	0.0	\$82.75	\$995.07	\$200.00	\$795.07	9.6	356
ECM 1	Retrofit Fixtures with LED Lamps	354	0.4	0.0	\$82.75	\$995.07	\$200.00	\$795.07	9.6	356

During lighting upgrade planning and design, we recommend a comprehensive approach that considers both the efficiency of the lighting fixtures and how they are controlled. Please see **Appendix A: Equipment Inventory & Recommendations** for a detailed list of the locations and recommended upgrades for each lighting measure.

ECM I: Retrofit Fixtures with LED Lamps

Summary of Measure Economics

Interior/ Exterior		Peak Demand Savings (kW)		Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)	Estimated Net Cost (\$)	Simple Payback Period (yrs)	CO ₂ e Emissions Reduction (lbs)
Interior	354	0.4	0.0	\$82.75	\$995.07	\$200.00	\$795.07	9.6	356
Exterior	0	0.0	0.0	\$0.00	\$0.00	\$0.00	\$0.00	0.0	0

Measure Description

We recommend retrofitting existing linear fluorescent T8 fixtures with LED lamps. Many LED tube lamps are direct replacements for existing fluorescent lamps and can be installed while leaving the fluorescent fixture ballast in place. LED bulbs can be used in existing fixtures as a direct replacement for most other lighting technologies. This measure saves energy by installing LEDs which use less power than other lighting technologies yet provide equivalent lighting output for the space.

Additional savings from lighting maintenance can be anticipated since LEDs have lifetimes which are more than twice that of a fluorescent tubes.

4.1.2 HVAC System Upgrades

Our recommendation for HVAC system improvement are summarized in Figure 16 below.

Figure 16 - Summary of HVAC System Improvement ECMs

	Energy Conservation Measure HVAC System Improvements Install Pipe Insulation	Annual Electric Savings (kWh)	Peak Demand Savings (kW)		_	Estimated Install Cost (\$)	Estimated Incentive (\$)	Estimated Net Cost (\$)		CO ₂ e Emissions Reduction (lbs)
	HVAC System Improvements	109	0.0	0.0	\$25.49	\$261.00	\$0.00	\$261.00	10.2	110
ECM 2	Install Pipe Insulation	109	0.0	0.0	\$25.49	\$261.00	\$0.00	\$261.00	10.2	110





ECM 2: Install Pipe Insulation

Summary of Measure Economics

	Peak Demand Savings (kW)		· ·	Estimated Install Cost (\$)		Estimated Net Cost (\$)	Simple Payback Period (yrs)	CO ₂ e Emissions Reduction (lbs)
109	0.0	0.0	\$25.49	\$261.00	\$0.00	\$261.00	10.2	110

Measure Description

We recommend installing insulation on domestic water heating system piping. Distribution system losses are dependent on heating water system temperature, the size of the distribution system, and the level of insulation of the piping. Significant energy savings can be achieved when insulation has not been well maintained. When the insulation is exposed to water, when the insulation has been removed from some areas of the pipe, or when valves have not been properly insulated system efficiency can be significantly reduced. This measure saves energy by reducing heat losses from the heating distribution system.

4.1.3 Domestic Hot Water Heating System Upgrades

Our recommendations for domestic water heating system improvements are summarized in Figure 17 below.

Figure 17 - Summary of Domestic Water Heating ECMs

	Energy Conservation Measure Domestic Water Heating Upgrade M 3 Install Low-Flow Domestic Hot Water Devices	Annual Electric Savings (kWh)	Peak Demand Savings (kW)		•	Estimated Install Cost (\$)	Estimated Incentive (\$)	Estimated Net Cost (\$)		CO ₂ e Emissions Reduction (lbs)
	Domestic Water Heating Upgrade	130	0.0	0.0	\$30.37	\$43.02	\$0.00	\$43.02	1.4	131
ECM 3	Install Low-Flow Domestic Hot Water Devices	130	0.0	0.0	\$30.37	\$43.02	\$0.00	\$43.02	1.4	131

Please see **Appendix A: Equipment Inventory & Recommendations** for more details on the facility's existing domestic hot water equipment and recommended system upgrades.





ECM 3: Install Low-Flow DHW Devices

Summary of Measure Economics

	Peak Demand Savings (kW)			Estimated Install Cost (\$)		Estimated Net Cost (\$)	Simple Payback Period (yrs)	CO ₂ e Emissions Reduction (Ibs)
130	0.0	0.0	\$30.37	\$43.02	\$0.00	\$43.02	1.4	131

Measure Description

We recommend installing low-flow domestic hot water devices to reduce overall hot water demand. Energy demand from domestic hot water heating systems can be reduced by reducing water usage in general. Faucet aerators can reduce hot water usage, relative to standard aerators, which saves energy.

Low-flow devices reduce the overall water flow from the fixture, while still adequate pressure for washing. This reduces the amount of water used per day resulting in energy and water savings.

4.2 ECMs Evaluated But Not Recommended

The measures below have been evaluated by the auditor but are not recommended for implementation at the facility. Reasons for exclusion can be found in each measure description section.

Figure 18 - Summary of Measures Evaluated, But Not Recommended

Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)		·	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)		CO ₂ e Emissions Reduction (Ibs)
Lighting Upgrades	6,117	0.0	0.0	\$1,430.66	\$59,805.44	\$390.00	\$59,415.44	41.5	6,160
Install LED Fixtures	6,117	0.0	0.0	\$1,430.66	\$59,805.44	\$390.00	\$59,415.44	41.5	6,160
TOTALS	6,117	0.0	0.0	\$1,430.66	\$59,805.44	\$390.00	\$59,415.44	41.5	6,160

^{* -} All incentives presented in this table are based on NJ Smart Start Building equipment incentives and assume proposed equipment meets minimum performance criteria for that program.

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).





Install LED Fixtures

Summary of Measure Economics

Interior/ Exterior		Peak Demand Savings (kW)		Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)	Estimated Net Cost (\$)	Simple Payback Period (yrs)	CO ₂ e Emissions Reduction (Ibs)
Interior	0	0.0	0.0	\$0.00	\$0.00	\$0.00	\$0.00	0.0	0
Exterior	6,117	0.0	0.0	\$1,430.66	\$59,805.44	\$390.00	\$59,415.44	41.5	6,160

Measure Description

We typically recommend replacing existing pole mounted stadium light fixtures containing metal halide lamps and ballasts with new high performance LED light fixtures when cost effective. This measure saves energy by installing LEDs which use less power than other technologies with a comparable light output.

Additional savings from lighting maintenance can be anticipated since LEDs have lifetimes which are much longer than traditional HID technology.

Please see **Appendix A: Equipment Inventory & Recommendations** for a detailed list of lighting fixture locations and proposed measures.

Reasons for not Recommending

The payback period associated with replacement of the exterior light fixtures exceeds the average life of the equipment, therefore, the project is not recommended on the basis of energy savings alone. However, this measure was evaluated to demonstrate the potential benefits available for upgrading to high efficiency equipment. Some of the other benefits may include improved quality of light, reliability of operations, and reduced maintenance costs. These additional factors may support justification for implementing this measure. Also, the cost associated with implementing LED exterior lighting upgrades continues to reduce as the technology continues to gain acceptance. This measure was evaluated based on facility staff's interest.





5 ENERGY EFFICIENT PRACTICES

In addition to the quantifiable savings estimated in Section 4, a facility's energy performance can also be improved through application of many low cost or no-cost energy efficiency strategies. By employing certain behavioral and operational changes and performing routine maintenance on building systems, equipment lifetime can be extended; occupant comfort, health and safety can be improved; and energy and O&M costs can be reduced. The recommendations below are provided as a framework for developing a whole building maintenance plan that is customized to your facility. Consult with qualified equipment specialists for details on proper maintenance and system operation.

Reduce Air Leakage

Air leakage, or infiltration, occurs when outside air enters a building uncontrollably through cracks and openings. Properly sealing such cracks and openings can significantly reduce heating and cooling costs, improve building durability, and create a healthier indoor environment. This includes caulking or installing weather stripping around leaky doors and windows allowing for better control of indoor air quality through controlled ventilation.

Develop a Lighting Maintenance Schedule

In addition to routine fixture cleaning, development of a maintenance schedule can both ensure maintenance is performed regularly and can reduce the overall cost of fixture re-lamping and re-ballasting. By re-lamping and re-ballasting fixtures in groups, lighting levels are better maintained and the number of site visits by a lighting technician or contractor can be minimized, decreasing the overall cost of maintenance.

Clean Evaporator/Condenser Coils on AC Systems

Dirty evaporators and condensers coils cause a restriction to air flow and restrict heat transfer. This results in increased evaporator and condenser fan load and a decrease in cooling system performance. Keeping the coils clean allows the fans and cooling system to operate more efficiently.

Clean and/or Replace HVAC Filters

Air filters work to reduce the amount of indoor air pollution and increase occupant comfort. Over time, filters become less and less effective as particulate buildup increases. In addition to health concerns related to clogged filters, filters that have reached saturation also restrict air flow through the facility's air conditioning or heat pump system, increasing the load on the distribution fans and decreasing occupant comfort levels. Filters should be checked monthly and cleaned or replaced when appropriate.

Perform Proper Water Heater Maintenance

At least once a year, drain a few gallons out of the water heater using the drain valve. If there is a lot of sediment or debris, then a full flush is recommended. Turn the temperature down and then completely drain the tank. Once a year check for any leaks or heavy corrosion on the pipes and valves. For gas water heaters, check the draft hood and make sure it is placed properly, with a few inches of air space between the tank and where it connects to the vent. Look for any corrosion or wear on the gas line and on the piping. If you noticed any black residue, soot or charred metal, this is a sign you may be having combustion issues and you should have the unit serviced by a professional. For electric water heaters, look for any signs of leaking such as rust streaks or residue around the upper and lower panels covering the electrical





components on the tank. For water heaters over three to four years old have a technician inspect the sacrificial anode annually.

Water Conservation

Installing low-flow faucets or faucet aerators, low-flow showerheads, and kitchen sink pre-rinse spray valves saves both energy and water. These devices save energy by reducing the overall amount of hot water used hence reducing the energy used to heat the water. The flow ratings for EPA WaterSense™ (http://www3.epa.gov/watersense/products) labeled devices are 1.5 gpm for bathroom faucets, 2.0 gpm for showerheads, and 1.28 gpm for pre-rinse spray valves.

Installing dual flush or low-flow toilets and low-flow or waterless urinals are additional ways to reduce the sites water use, however, these devices do not provide energy savings at the site level. Any reduction in water use does however ultimately reduce grid level electricity use since a significant amount of electricity is used to deliver water from reservoirs to end users. The EPA WaterSense™ ratings for urinals is 0.5 gallons per flush (gpf) and toilets that use as little as 1.28 gpf (this is lower than the current 1.6 gpf federal standard).

Refer to Section 4.1.3 for any low-flow ECM recommendations.





6 ON-SITE GENERATION MEASURES

On-site generation measure options include both renewable (e.g., solar, wind) and non-renewable (e.g., fuel cells) on-site technologies that generate power to meet all or a portion of the electric energy needs of a facility, often repurposing any waste heat where applicable. Also referred to as distributed generation, these systems contribute to Greenhouse Gas (GHG) emission reductions, demand reductions and reduced customer electricity purchases, resulting in the electric system reliability through improved transmission and distribution system utilization.

The State of New Jersey's Energy Master Plan (EMP) encourages new distributed generation of all forms and specifically focuses on expanding use of combined heat and power (CHP) by reducing financial, regulatory and technical barriers and identifying opportunities for new entries. The EMP also outlines a goal of 70% of the State's electrical needs to be met by renewable sources by 2050.

Preliminary screenings were performed to determine the potential that a generation project could provide a cost-effective solution for your facility. Before making a decision to implement, a feasibility study should be conducted that would take a detailed look at existing energy profiles, siting, interconnection, and the costs associated with the generation project including interconnection costs, departing load charges, and any additional special facilities charges.

6.1 Photovoltaic

Sunlight can be converted into electricity using photovoltaics (PV) modules. Modules are racked together into an array that produces direct current (DC) electricity. The DC current is converted to alternating current (AC) through an inverter. The inverter is interconnected to the facility's electrical distribution system. The amount of unobstructed area available determines how large of a solar array can be installed. The size of the array combined with the orientation, tilt, and shading elements determines the energy produced.

A preliminary screening based on the facility's electric demand, size and location of free area, and shading elements shows that the facility has a **Low** potential for installing a PV array.

In order to be cost-effective, a solar PV array needs certain minimum criteria, such as flat or south-facing rooftop or other unshaded space on which to place the PV panels. In our opinion, the facility does appear not meet these minimum criteria for cost-effective PV installation.

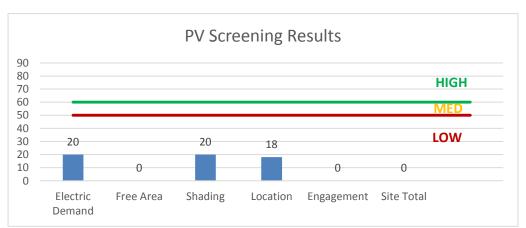


Figure 19 - Photovoltaic Screening





For more information on solar PV technology and commercial solar markets in New Jersey, or to find a qualified solar installer, who can provide a more detailed assessment of the specific costs and benefits of solar develop of the site, please visit the following links below:

- Basic Info on Solar PV in NJ: http://www.njcleanenergy.com/whysolar
- NJ Solar Market FAQs: http://www.njcleanenergy.com/renewable-energy/program-updates-and-background-information/solar-transition/solar-market-faqs
- Approved Solar Installers in the NJ Market: http://www.njcleanenergy.com/commercial-industrial/programs/nj-smartstart-buildings/tools-and-resources/tradeally/approved_vendorsearch/?id=60&start=1

6.2 Combined Heat and Power

Combined heat and power (CHP) is the on-site generation of electricity along with the recovery of heat energy, which is put to beneficial use. Common technologies for CHP include reciprocating engines, microturbines, fuel cells, backpressure steam turbines, and (at large facilities) gas turbines. Electric generation from a CHP system is typically interconnected to local power distribution systems. Heat is recovered from exhaust and ancillary cooling systems and interconnected to the existing hot water (or steam) distribution systems.

CHP systems are typically used to produce a portion of the electric power used onsite by a facility, with the balance of electric power needs supplied by grid purchases. The heat is used to supplement (or supplant) existing boilers for the purpose of space heating and/or domestic hot water heating. Waste heat can also be routed through absorption chillers for the purpose of space cooling. The key criteria used for screening, however, is the amount of time the system operates at full load and the facility's ability to use the recovered heat. Facilities with continuous use for large quantities of waste heat are the best candidates for CHP.

A preliminary screening based on heating and electrical demand, siting, and interconnection shows that the facility has a **Low** potential for installing a cost-effective CHP system.

Lack of gas service, low or infrequent thermal load, and lack of space near the existing boilers are the most significant factors contributing to no potential for CHP at the site. In our opinion, the facility does not appear to meet the minimum requirements for a cost-effective CHP installation.

For a list of qualified firms in New Jersey specializing in commercial CHP cost assessment and installation, go to: http://www.nicleanenergy.com/commercial-industrial/programs/ni-smartstart-buildings/tools-and-resources/tradeally/approved_vendorsearch/

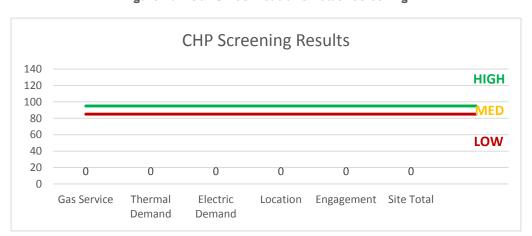


Figure 20 - Combined Heat and Power Screening





7 DEMAND RESPONSE

Demand Response (DR) is a program designed to reduce the electric load of commercial facilities when electric wholesale prices are high or when the reliability of the electric grid is threatened due to peak demand. Demand Response service providers (a.k.a. Curtailment Service Providers) are registered with PJM, the independent system operator (ISO) for mid-Atlantic state region that is charged with maintaining electric grid reliability.

By enabling grid operators to call upon Curtailment Service Providers and commercial facilities to reduce electric usage during times of peak demand, the grid is made more reliable and overall transmission costs are reduced for all ratepayers. Curtailment Service Providers provide regular payments to medium and large consumers of electric power for their participation in DR programs. Program participation is voluntary and participants receive payments whether or not their facility is called upon to curtail their electric usage.

Typically an electric customer needs to be capable of reducing their electric demand, within minutes, by at least 100 kW or more in order to participate in a DR program. Customers with a greater capability to quickly curtail their demand during peak hours will receive higher payments. Customers with back-up generators onsite may also receive additional DR payments for their generating capacity if they agree to run the generators for grid support when called upon. Eligible customers who have chosen to participate in a DR programs often find it to be a valuable source of revenue for their facility because the payments can significantly offset annual electric costs.

Participating customers can often quickly reduce their peak load through simple measures, such as temporarily raising temperature set points on thermostats, so that air conditioning units run less frequently, or agreeing to dim or shut off less critical lighting. This usually requires some level of building automation and controls capability to ensure rapid load reduction during a DR curtailment event. DR program participants may need to install smart meters or may need to also sub-meter larger energy-using equipment, such as chillers, in order to demonstrate compliance with DR program requirements.

DR does not include the reduction of electricity consumption based on normal operating practice or behavior. For example, if a company's normal schedule is to close for a holiday, the reduction of electricity due to this closure or scaled-back operation is not considered a demand response activity in most situations.

The first step toward participation in a DR program is to contact a Curtailment Service Provider. A list of these providers is available on PJM's website and it includes contact information for each company, as well as the states where they have active business (www.pjm.com/markets-and-operations/demand-response/csps.aspx). PJM also posts training materials that are developed for program members interested in specific rules and requirements regarding DR activity (www.pjm.com/training/trainingmaterial.aspx), along with a variety of other DR program information.

Curtailment Service Providers typically offer free assessments to determine a facility's eligibility to participate in a DR program. They will provide details regarding program rules and requirements for metering and controls, assess a facility's ability to temporarily reduce electric load, and provide details on payments to be expected for participation in the program. Providers usually offer multiple options for DR to larger facilities and may also install controls or remote monitoring equipment of their own to help ensure compliance with all terms and conditions of a DR contract.

In our opinion this building does not appear to be a good candidate for the demand response program.





8 Project Funding / Incentives

The NJCEP is able to provide the incentive programs described below, and other benefits to ratepayers, because of the Societal Benefits Charge (SBC) Fund. The SBC was created by the State of New Jersey's Electricity Restructuring Law (1999), which requires all customers of investor-owned electric and gas utilities to pay a surcharge on their monthly energy bills. As a customer of a state-regulated electric or gas utility and therefore a contributor to the fund your organization is eligible to participate in the LGEA program and also eligible to receive incentive payment for qualifying energy efficiency measures. Also available through the NJBPU are some alternative financing programs described later in this section. Please refer to Figure 21 for a list of the eligible programs identified for each recommended ECM.

Combined Pay For Large SmartStart SmartStart Performance Energy **Energy Conservation Measure Direct Install** Prescriptive Custom Existing Users Power and **Buildings** Program Fuel Cell ECM 1 Retrofit Fixtures with LED Lamps Χ Х ECM 2 Install Pipe Insulation Install Low-Flow Domestic Hot Water Devices ECM 3

Figure 21 - ECM Incentive Program Eligibility

SmartStart (SS) is generally well-suited for implementation of individual measures or small group of measures. It provides flexibility to install measures at your own pace using in-house staff or a preferred contractor. Direct Install (DI) caters to small to mid-size facilities that can bundle multiple ECMs together. This can greatly simplify participation and may lead to higher incentive amounts, but requires the use of pre-approved contractors. The Pay for Performance (P4P) program is a "whole-building" energy improvement program designed for larger facilities. It requires implementation of multiple measures meeting minimum savings thresholds, as well as use of pre-approved consultants. The Large Energy Users Program (LEUP) is available to New Jersey's largest energy users giving them flexibility to install as little or as many measures, in a single facility or several facilities, with incentives capped based on the entity's annual energy consumption. LEUP applicants can use in-house staff or a preferred contractor.

Generally, the incentive values provided throughout the report assume the SS program is utilized because it provides a consistent basis for comparison of available incentives for various measures, though in many cases incentive amounts may be higher through participation in other programs.

Brief descriptions of all relevant financing and incentive programs are located in the sections below. Further information, including most current program availability, requirements, and incentive levels can be found at: www.njcleanenergy.com/ci

8.1 SmartStart

Overview

The SmartStart (SS) program offers incentives for installing prescriptive and custom energy efficiency measures at your facility. Routinely the program adds, removes or modifies incentives from year to year for various energy efficiency equipment based on market trends and new technologies.

Equipment with Prescriptive Incentives Currently Available:

Electric Chillers Electric Unitary HVAC





Gas Cooling
Gas Heating
Gas Water Heating
Ground Source Heat Pumps
Lighting
Lighting Controls
Refrigeration Doors
Refrigeration Controls
Refrigerator/Freezer Motors
Food Service Equipment
Variable Frequency Drives

Most equipment sizes and types are served by this program. This program provides an effective mechanism for securing incentives for energy efficiency measures installed individually or as part of a package of energy upgrades.

Incentives

The SS prescriptive incentive program provides fixed incentives for specific energy efficiency measures, whereas the custom SS program provides incentives for more unique or specialized technologies or systems that are not addressed through prescriptive incentive offerings for specific devices.

Since your facility is an existing building, only the Retrofit incentives have been applied in this report. Custom Measure incentives are calculated at \$0.16/kWh and \$1.60/therm based on estimated annual savings, capped at 50% of the total installed incremental project cost, or a project cost buy down to a one year payback (whichever is less. Program incentives are capped at \$500,000 per electric account and \$500,000 per natural gas account, per fiscal year.

How to Participate

To participate in the SmartStart program you will need to submit an application for the specific equipment to be installed. Many applications are designed as rebates, although others require application approval prior to installation. Applicants may work with a contractor of their choosing and can also utilize internal personnel, which provides added flexibility to the program. Using internal personnel also helps improve the economics of the ECM by reducing the labor cost that is included in the tables in this report.

Detailed program descriptions, instructions for applying and applications can be found at: www.njcleanenergy.com/SSB

8.2 Direct Install

Overview

Direct Install (DI) is a turnkey program available to existing small to medium-sized facilities with a peak electric demand that does not exceed 200 kW for any recent 12-month period. You will work directly with a pre-approved contractor who will perform a free energy assessment at your facility, identify specific eligible measures, and provide a clear scope of work for installation of selected measures. Energy efficiency measures may include lighting and lighting controls, refrigeration, HVAC, motors, variable speed drives and controls.

Incentives

The program pays up to **70%** of the total installed cost of eligible measures, up to \$125,000 per project. Direct Install participants will also be held to a fiscal year cap of \$250,000 per entity.





How to Participate

To participate in the DI program you will need to contact the participating contractor who the region of the state where your facility is located. A complete list of DI program partners is provided on the DI website linked below. The contractor will be paid the measure incentives directly by the program which will pass on to you in the form of reduced material and implementation costs. This means up to 70% of eligible costs are covered by the program, subject to program caps and eligibility, while the remaining 30% of the cost is paid to the contractor by the customer.

Since DI offers a free assessment of eligible measures, DI is also available to small businesses and other commercial facilities too that may not be eligible for the more detailed facility audits provided by LGEA.

Detailed program descriptions and applications can be found at: www.njcleanenergy.com/DI

8.3 Energy Savings Improvement Program

The Energy Savings Improvement Program (ESIP) is an alternate method for New Jersey's government agencies to finance the implementation of energy conservation measures. An ESIP is a type of "performance contract", whereby school districts, counties, municipalities, housing authorities and other public and state entities enter in to contracts to help finance building energy upgrades. This is done in a manner that ensures that annual payments are lower than the savings projected from the ECMs, ensuring that ESIP projects are cash flow positive in year one, and every year thereafter. ESIP provides government agencies in New Jersey with a flexible tool to improve and reduce energy usage with minimal expenditure of new financial resources. NJCEP incentive programs can be leveraged to help further reduce the total project cost of eligible measures.

This LGEA report is the first step to participating in ESIP. Next, you will need to select an approach for implementing the desired ECMs:

- (1) Use an Energy Services Company or "ESCO";
- (2) Use independent engineers and other specialists, or your own qualified staff, to provide and manage the requirements of the program through bonds or lease obligations;
- (3) Use a hybrid approach of the two options described above where the ESCO is utilized for some services and independent engineers, or other specialists or qualified staff, are used to deliver other requirements of the program.

After adopting a resolution with a chosen implementation approach, the development of the Energy Savings Plan (ESP) can begin. The ESP demonstrates that the total project costs of the ECMs are offset by the energy savings over the financing term, not to exceed 15 years. The verified savings will then be used to pay for the financing.

The ESIP approach may not be appropriate for all energy conservation and energy efficiency improvements. Entities should carefully consider all alternatives to develop an approach that best meets their needs. A detailed program descriptions and application can be found at: www.njcleanenergy.com/ESIP

Please note that ESIP is a program delivered directly by the NJBPU and is not an NJCEP incentive program. As mentioned above, you may utilize NJCEP incentive programs to help further reduce costs when developing the ESP. You should refer to the ESIP guidelines at the link above for further information and quidance on next steps.





9 ENERGY PURCHASING AND PROCUREMENT STRATEGIES

9.1 Retail Electric Supply Options

In 1999, New Jersey State Legislature passed the Electric Discount & Energy Competition Act (EDECA) to restructure the electric power industry in New Jersey. This law deregulated the retail electric markets, allowing all consumers to shop for service from competitive electric suppliers. The intent was to create a more competitive market for electric power supply in New Jersey. As a result, utilities were allowed to charge Cost of Service and customers were given the ability to choose a third party (i.e. non-utility) energy supplier.

Energy deregulation in New Jersey has increased energy buyers' options by separating the function of electricity distribution from that of electricity supply. So, though you may choose a different company from which to buy your electric power, responsibility for your facility's interconnection to the grid and repair to local power distribution will still reside with the traditional utility company serving your region.

If your facility is not purchasing electricity from a third party supplier, consider shopping for a reduced rate from third party electric suppliers. If your facility is purchasing electricity from a third party supplier, review and compare prices at the end of the current contract or every couple years.

A list of third party electric suppliers, who are licensed by the state to provide service in New Jersey, can be found online at: www.state.nj.us/bpu/commercial/shopping.html.

9.2 Retail Natural Gas Supply Options

The natural gas market in New Jersey has also been deregulated. Most customers that remain with the utility for natural gas service pay rates that are market-based and that fluctuate on a monthly basis. The utility provides basic gas supply service (BGSS) to customers who choose not to buy from a Third Party Supplier for natural gas commodity.

A customer's decision about whether to buy natural gas from a retail supplier is typically dependent upon whether a customer seeks budget certainty and/or longer-term rate stability. Customers can secure longer-term fixed prices by signing up for service through a third party retail natural gas supplier. Many larger natural gas customers may seek the assistance of a professional consultant to assist in their procurement process.

If your facility is not purchasing natural gas from a third party supplier, consider shopping for a reduced rate from third party natural gas suppliers. If your facility is purchasing natural gas from a third party supplier, review and compare prices at the end of the current contract or every couple years.

A list of third party natural gas suppliers, who are licensed by the state to provide service in New Jersey, can be found online at: www.state.nj.us/bpu/commercial/shopping.html.





Appendix A: Equipment Inventory & Recommendations

Lighting Inventory & Recommendations

Ligiting inv	Existing C	onditions	113			Proposed Condition	18						Energy Impact	& Financial A	nalysis				
Location	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Parking Lot	2	Metal Halide: (1) 100W Lamp	None	128	4,000	Fixture Replacement	No	2	LED - Fixtures: Other	None	35	4,000	0.00	744	0.0	\$174.01	\$564.48	\$10.00	3.19
Parking Lot	4	Metal Halide: (1) 150W Lamp	None	190	4,000	Fixture Replacement	No	4	LED - Fixtures: Other	None	65	4,000	-0.21	-1,175	0.0	-\$274.86	\$1,128.96	\$20.00	-4.03
Storage	2	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	114	50	Relamp	No	2	LED - Linear Tubes: (4) 4' Lamps	Wall Switch	58	50	0.09	6	0.0	\$1.48	\$190.27	\$40.00	101.53
Men's Restroom	2	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	114	1,500	Relamp	No	2	LED - Linear Tubes: (4) 4' Lamps	Wall Switch	58	1,500	0.09	190	0.0	\$44.40	\$190.27	\$40.00	3.38
Women's Restroom	2	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	114	1,500	Relamp	No	2	LED - Linear Tubes: (4) 4' Lamps	Wall Switch	58	1,500	0.09	190	0.0	\$44.40	\$190.27	\$40.00	3.38
Storage	2	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	114	50	Relamp	No	2	LED - Linear Tubes: (4) 4' Lamps	Wall Switch	58	50	0.09	6	0.0	\$1.48	\$190.27	\$40.00	101.53
Attic	4	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	62	50	Relamp	No	4	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	50	0.11	7	0.0	\$1.74	\$234.00	\$40.00	111.22
Sports Field	22	Metal Halide: (1) 1500W Lamp	None	1,610	166	Fixture Replacement	No	22	LED - Fixtures: Other	None	900	166	-16.11	-3,723	0.0	-\$870.76	\$44,000.00	\$110.00	-50.40
Sports Field	32	Metal Halide: (1) 100W Lamp	None	128	166	Fixture Replacement	No	32	LED - Fixtures: Other	None	35	166	-0.91	-211	0.0	-\$49.26	\$9,031.68	\$160.00	-180.12
Sports Field	18	Metal Halide: (1) 100W Lamp	None	128	166	Fixture Replacement	No	18	LED - Fixtures: Other	None	35	166	-0.51	-118	0.0	-\$27.71	\$5,080.32	\$90.00	-180.12
New Restroom Bldg	4	LED - Fix tures: Outdoor Wall-Mounted Area Fix ture	None	12	4,000	None	No	4	LED - Fixtures: Outdoor Wall-Mounted Area Fixture	None	12	4,000	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Women's Restroom	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	1,500	None	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	1,500	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Mechanical Room	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	50	None	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	50	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Men's Restroom	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	1,500	None	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	1,500	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00





Motor Inventory & Recommendations

	Ocation Served Quantity Motor Application Motor Efficiency Con								Conditions			Energy Impact	& Financial A	nalysis				
Location	· · · · · · · · · · · · · · · · · · ·		Motor Application			VFD Control?	Annual Operating Hours	Install High Efficiency Motors?	Full Load Efficiency	Install VFDs?	Number of VFDs	Total Peak kW Savings	Total Annual	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Shed	Irrigation System	1	Other	5.0	90.0%	No	100	No	90.0%	No		0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Attic	Fumace	1	Supply Fan	0.3	60.0%	No	800	No	60.0%	No		0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00

Electric HVAC Inventory & Recommendations

	-	Existing (Conditions			Proposed	Condition	s					Energy Impac	t & Financial A	nalysis				
Location	Area(s)/System(s) Served	System Quantity		Capacity per Unit				System Tyne	Capacity per Unit	Mode	Heating Mode Efficiency (COP)	Install Dual Enthalpy Economizer?	Total Peak	Total Annual kWh Savings	MMRtu	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Attic	Building #1	1	Electric Forced Air Furnace		47.78	No						No	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Outdoor	Building #1	1	Split-System AC	3.50		No						No	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00

Pipe Insulation Recommendations

		Recommenda	ation Inputs	Energy Impac	t & Financial A	nalysis				
Location	Area(s)/System(s) Affected	Length of Uninsulated Pipe (ft)	Pipe Diameter (in)	Total Peak kW Savings	Total Annual kWh Savings	MMBtu	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Attic	Domestic Hot Water	60	1.25	0.00	109	0.0	\$25.49	\$261.00	\$0.00	10.24

DHW Inventory & Recommendations

		Existing (Conditions	Proposed	Condition	s				Energy Impac	t & Financial A	nalysis				
Location	Area(s)/System(s) Served	System Quantity	System Lyne	Replace?	System Quantity	System Tyne	Fuel Type	System Efficiency	Efficiency Units		Total Annual kWh Savings	MMRtu	Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years
Attic	Building #1	1	Storage Tank Water Heater (≤ 50 Gal)	No						0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Mechanical Room	Building #2	1	Storage Tank Water Heater (≤ 50 Gal)	No						0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00





Low-Flow Device Recommendations

	Recomme	edation Inputs			Energy Impact	t & Financial Ar	nalysis				
Location	Device Quantity	Device Type	Existing Flow Rate (gpm)	Proposed Flow Rate (gpm)	Total Peak	Total Annual kWh Savings	MMRtu	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Restrooms	6	Faucet Aerator (Lavatory)	2.20	1.00	0.00	130	0.0	\$30.37	\$43.02	\$0.00	1.42

Plug Load Inventory

	Existing Conditions		
		Energy	ENERGY
Location	Quantity	Equipment Description Rate	STAR
		(W)	Qualified?
Misc Entertainment	1	Performance Equipment 100,000.	0



