





Local Government Energy Audit Report

DPW Plant 2, Well 11 July 9, 2019

Prepared for:

Borough of Berlin New Freedon-Watsontown Road Berlin, NJ 08009 Prepared by:

TRC Energy Services 900 Route 9 North Woodbridge, NJ 07095

Disclaimer

The goal of this audit report is to identify potential energy efficiency opportunities, help prioritize specific measures for implementation, and provide information about financial incentives that may be available. Most energy conservation measures have received preliminary analysis of feasibility that identifies expected ranges of savings and costs. This level of analysis is usually considered sufficient to establish a basis for further discussion and to help prioritize energy measures.

TRC Energy Services (TRC) reviewed the energy conservation measures and estimates of energy savings were reviewed for technical accuracy. Actual, achieved energy savings depend on behavioral factors and other uncontrollable variables and, therefore, estimates of final energy savings are not guaranteed. TRC and the New Jersey Board of Public Utilities (NJBPU) shall in no event be liable should the actual energy savings vary.

TRC bases estimated installation costs on our experience at similar facilities, pricing from local contractors and vendors, and/or cost estimates from RS Means. We encourage the owner of the facility is encouraged to independently confirm these cost estimates and to obtain multiple estimates when considering measure installations. Actual installation costs can vary widely based on individual measures and conditions. TRC and NJBPU do not guarantee installed cost estimates and shall in no event be held liable should actual installed costs vary from estimates.

New Jersey's Clean Energy Program (NJCEP) incentive values provided in this report are estimates based on program information available at the time of the report. Incentive levels are not guaranteed. The NJBPU reserves the right to extend, modify, or terminate programs without prior notice. Please review all available program incentives and eligibility requirements prior to selecting and installing any energy conservation measures.

The customer and their respective contractor(s) are responsible to implement energy conservation measures in complete conformance with all applicable local, state and federal requirements.

Copyright ©2019 TRC Energy Services. All rights reserved.

Reproduction or distribution of the whole, or any part of the contents of this document without written permission of TRC is prohibited. Neither TRC nor any of its employees makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any data, information, method, product or process disclosed in this document, or represents that its use will not infringe upon any privately-owned rights, including but not limited to, patents, trademarks or copyrights.





Table of Contents

1	Exec	Executive Summary1				
	1.1	Planning Your Project	4			
	Pic	k Your Installation Approach	4			
	Mo	ore Options from Around the State	6			
2	Exist	ing Conditions	7			
	2.1	Site Overview	7			
	2.2	Building Occupancy				
	2.3	Building Envelope				
	2.4	Lighting Systems				
	2.5	Heating Systems				
	2.6	Domestic Hot Water				
	2.7	Water-Using Systems	10			
	2.8	Process Equipment	10			
3	Ener	gy Use and Costs	11			
	3.1	Electricity	13			
	3.2	Natural Gas				
	3.3	Benchmarking				
		icking Your Energy Performance				
4	Ener	gy Conservation Measures	1/			
	4.1	Lighting	19			
	EC	M 1: Install LED Fixtures	19			
	EC	M 2: Retrofit Fluorescent Fixtures with LED Lamps and Drivers	19			
	EC	M 3: Retrofit Fixtures with LED Lamps	20			
	4.2	HVAC	20			
	EC	M 4: Install Programmable Thermostats	20			
5		gy Efficient Best Practices				
		ergy Tracking with ENERGY STAR® Portfolio Manager®				
		ndow Treatments/Coverings				
		otor Maintenance				
		ater Heater Maintenance				
	Wa	ater Conservation	22			
	Pro	ocurement Strategies	22			
6	On-si	ite Generation	23			
	6.1	Solar Photovoltaic	23			
	6.2	Combined Heat and Power	25			
7	Proje	ect Funding and Incentives	26			
	7.1	SmartStart				
	7.1	Direct Install				
	7.2	Energy Savings Improvement Program				
		=::-:0, -:::-0-::				






7.4	SREC Registration Program	30
8 Ene	rgy Purchasing and Procurement Strategies	31
8.1	Retail Electric Supply Options	31
8.2	Retail Natural Gas Supply Options	31
Append	ix A: Equipment Inventory & Recommendations	A -1
Append	ix B: ENERGY STAR® Statement of Energy Performance	B-1
Annend	ix C: Glossarv	C-1





1 EXECUTIVE SUMMARY

The New Jersey Board of Public Utilities (NJBPU) has sponsored this Local Government Energy Audit (LGEA) report for DPW Plant 2, Well 11. This report provides you with information about your facility's energy use, identifies energy conservation measures (ECMs) that can reduce your energy use, and provides information and assistance to help make changes in your facility. TRC Energy Services (TRC) conducted this study as part of a comprehensive effort to assist New Jersey school districts and local governments in controlling their energy costs and help protect our environment by reducing statewide energy consumption.

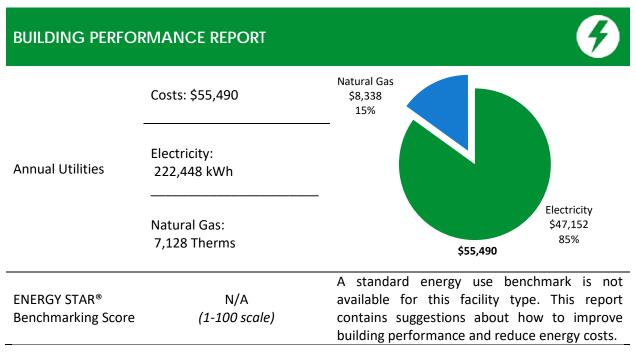

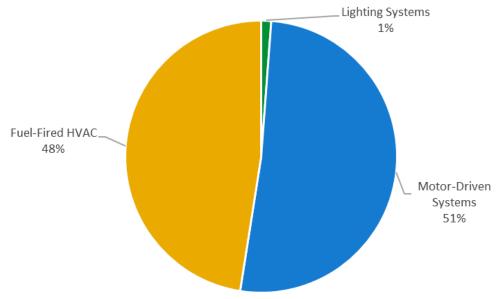


Figure 1 - Energy Use by System






POTENTIAL IMPROVEMENTS



This energy audit considered a range of potential energy improvements in your building. Costs and savings will vary between improvements. Presented below are two potential scopes of work for your consideration.


Scenario 1: Full Package (all evaluated measures)

Installation Cost	\$4,95	1
Potential Rebates & Incentive	es ¹ \$62	.6
Annual Cost Savings	\$79	9
Annual Energy Savings	Electricity: 3,398 kWh Natural Gas: 67 Therms	
Greenhouse Gas Emission Sav	vings 2 Tor	15
Simple Payback	5.4 Year	rs
Site Energy Savings (all utilitie	es) 19	%

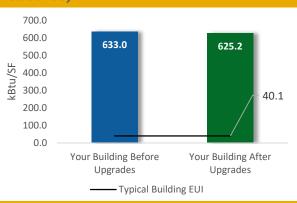

Scenario 2: Cost Effective Package²

Installation Cost	\$4,951	
Potential Rebates & Incentives	s \$626	
Annual Cost Savings	\$799	
Annual Energy Savings	Electricity: 3,398 kWh	
Annual Energy Savings	Natural Gas: 67 Therms	
Greenhouse Gas Emission Sav	vings 2 Tons	
Simple Payback	5.4 Years	
Site Energy Savings (all utilities	es) 1%	

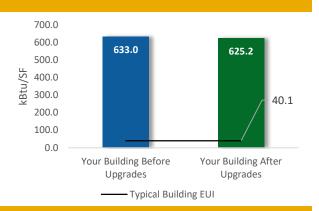

On-site Generation Potential

Photovoltaic	None
Combined Heat and Power	None

¹ Incentives are based on current SmartStart Prescriptive incentives. Other program incentives may apply.

² A cost-effective measure is defined as one where the simple payback does not exceed two-thirds of the expected proposed equipment useful life. Simple payback is based on the net measure cost after potential incentives.





#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Savings	Lifetime Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)		CO ₂ e Emissions Reduction (lbs)
Lighting Upgrades			1.4	0	\$692	\$10,377	\$4,621	\$626	\$3,995	5.8	3,276
ECM 1	Install LED Fixtures	2,707	0.4	0	\$574	\$8,606	\$2,898	\$300	\$2,598	4.5	2,726
ECM 2 Retrofit Fluorescent Fixtures with LED Lamps and Drivers		306	0.5	0	\$64	\$955	\$839	\$140	\$699	11.0	297
ECM 3 Retrofit Fixtures with LED Lamps		261	0.4	0	\$54	\$816	\$885	\$186	\$699	12.8	254
HVAC System Improvements		124	0.0	7	\$107	\$1,177	\$330	\$0	\$330	3.1	933
ECM 4 Install Programmable Thermostats		124	0.0	7	\$107	\$1,177	\$330	\$0	\$330	3.1	933
TOTALS		3,398	1.4	7	\$799	\$11,555	\$4,951	\$626	\$4,325	5.4	4,209

^{* -} All incentives presented in this table are based on NJ SmartStart equipment incentives and assume proposed equipment meets minimum performance criteria for that program.

Figure 2 – Evaluated Energy Improvements

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).





1.1 Planning Your Project

Careful planning makes for a successful energy project. When considering this scope of work, you will have some decisions to make, such as:

- How will the project be funded and/or financed?
- Is it best to pursue individual ECMs, groups of ECMs, or use a comprehensive approach where all ECMs are installed together?
- Are there other facility improvements that should happen at the same time?

Pick Your Installation Approach

New Jersey's Clean Energy Programs give you the flexibility to do a little or a lot. Rebates, incentives, and financing are available to help reduce both your installation costs and your energy bills. If you are planning to take advantage of these programs, make sure to review incentive program guidelines before proceeding. This is important because in most cases you will need to submit applications for the incentives before purchasing materials or starting installation.

The potential ECMs identified for this building likely qualify for multiple incentive and funding programs. Based on current program rules and requirements, your measures are likely to qualify for the following programs:

	Energy Conservation Measure	SmartStart	Direct Install	Pay For Performance
ECM 1	Install LED Fixtures	X	X	
ECM 2	Retrofit Fluorescent Fixtures with LED Lamps and Drivers	X	X	
ECM 3	Retrofit Fixtures with LED Lamps	Х	Х	
ECM 4	Install Programmable Thermostats	Х	X	

Figure 3 – Funding Options







New Jersey's Clean Energy Programs At-A-Glance

	SmartStart Flexibility to install at your own pace	Direct Install Turnkey installation	Pay for Performance Whole building upgrades
Who should use it?	Buildings installing individual measures or small group of measures.	Small to mid-size facilities that can bundle multiple measures together. Average peak demand should be below 200 kW. Not suitable for significant building shell issues.	Mid to large size facilities looking to implement as many measures as possible at one time. Peak demand should be over 200 kW.
How does it work?	Use in-house staff or your preferred contractor.	Pre-approved contractors pass savings along to you via reduced material and labor costs.	Whole-building approach to energy upgrades designed to reduce energy use by at least 15%. The more you save, the higher the incentives.
What are the Incentives?	Fixed incentives for specific energy efficiency measures.	Incentives pay up to 70% of eligible costs, up to \$125,000 per project. You pay the remaining 30% directly to the contractor.	Up to 25% of installation cost, calculated based on level of energy savings per square foot.
How do I participate?	Submit an application for the specific equipment to be installed.	Contact a participating contractor in your region.	Contact a pre-qualified Partner to develop your Energy Reduction Plan and set your energy savings targets.

Take the next step by visiting **www.njcleanenergy.com** for program details, applications, and to contact a qualified contractor.





Individual Measures with SmartStart

For facilities wishing to pursue only selected individual measures (or planning to phase implementation of selected measures over multiple years), incentives are available through the SmartStart program. To participate, you can use internal resources or an outside firm or contractor to perform the final design of the ECM(s) and install the equipment. Program pre-approval is required for some SmartStart incentives, so only after receiving pre-approval should you proceed with ECM installation.

Turnkey Installation with Direct Install

The Direct Install program provides turnkey installation of multiple measures through an authorized network of participating contractors. This program can provide substantially higher incentives than SmartStart, up to 70% of the cost of selected measures. Direct Install contractors will assess and verify individual measure eligibility and, in most cases, they perform the installation work. The Direct Install program is available to sites with an average peak demand of less than 200 kW.

Whole Building Approach with Pay for Performance

Pay for Performance can be a good option for medium to large sized facilities to achieve deep energy savings. Pay for Performance allows you to install as many measures as possible under a single project as well as address measures that may not qualify for other programs. Many facilities pursuing an Energy Savings Improvement Program (ESIP) loan also use this program. Pay for Performance works for larger customers with a peak demand over 200 kW. The minimum installed scope of work must include at least two unique measures resulting in at least 15% energy savings, where lighting cannot make up the majority of the savings.

More Options from Around the State

Financing and Planning Support with the Energy Savings Improvement Program (ESIP)

For larger facilities with limited capital availability to implement ECMs, project financing may be available through the ESIP. Supported directly by the NJBPU, ESIP provides government agencies with project development, design, and implementation support services, as well as, attractive financing for implementing ECMs. You have already taken the first step as an LGEA customer, because this report is required to participate in ESIP.

Resiliency with Return on Investment through Combined Heat & Power (CHP)

The CHP program provides incentives for combined heat and power (aka cogeneration) and waste heat to power projects. Combined heat and power systems generate power on-site and recover heat from the generation system to meet on-site thermal loads. Waste heat to power systems use waste heat to generate power. You will work with a qualified developer who will design a system that meets your building's heating and cooling needs.

Ongoing Electric Savings with Demand Response

The Demand Response Energy Aggregator program reduces electric loads at commercial facilities when wholesale electricity prices are high or when the reliability of the electric grid is threatened due to peak power demand. By enabling commercial facilities to reduce their electric demand during times of peak demand, the grid is made more reliable and overall transmission costs are reduced for all ratepayers. Curtailment service providers provide regular payments to medium and large consumers of electric power for their participation in demand response (DR) programs. Program participation is voluntary, and facilities receive payments regardless of whether they are called upon to curtail their load during times of peak demand.





2 EXISTING CONDITIONS

The New Jersey Board of Public Utilities (NJBPU) has sponsored this Local Government Energy Audit (LGEA) Report for DPW Plant 2, Well 11. This report provides information on how your facility uses energy, identifies energy conservation measures (ECMs) that can reduce your energy use, and provides information and assistance to help you implement the ECMs. This report also contains valuable information on financial incentives from New Jersey's Clean Energy Program (NJCEP) for implementing ECMs.

TRC conducted this study as part of a comprehensive effort to assist New Jersey educational and local government facilities in controlling energy costs and protecting our environment by offering a wide range of energy management options and advice.

2.1 Site Overview

On September 11, 2018, TRC performed an energy audit at DPW Plant 2, Well 11 located in Berlin, New Jersey. TRC met with Fred to review the facility operations and help focus our investigation on specific energy-using systems.

DPW Plant 2 is a two-story, 2,125 square foot building built in 1974 with Well 11 located in the same premise. Spaces include process rooms, control room, and restroom. Well 11 is a 200 square foot, single-story structure.

2.2 Building Occupancy

The facility is operational 24 hours a day, 7 days a week, year round. The Borough of Berlin staff visits the building as needed for maintenance and routine checks.

Building Name	Weekday/Weekend	Operating Schedule
DPW Plant 2	Weekday	12:00:00 AM - 12:00AM
DPVV Platit 2	Weekend	12:00:00 AM - 12:00AM
Well 11	Weekday	12:00:00 AM - 12:00AM
weii 11	Weekend	12:00:00 AM - 12:00AM

Figure 4 - Building Occupancy Schedule





2.3 Building Envelope

DPW Plant 2 and Well 11 building walls are concrete block over structural steel with a brick facade. The roof is flat and most likely covered with black EPDM membrane. There was no access to the roof but based on the viewable portion is anticipated to be in good condition.

The windows are single pane and in fair condition. Exterior doors are made of aluminum and are in good condition.



Building envelope



Windows

2.4 Lighting Systems

The primary interior lighting system uses 4-foot and 8-foot T8 and T12 linear fluorescent lamps. The fixtures are either 2 lamps or 4 lamps. The T8 fixtures have electronic ballasts and T12 fluorescent lamps use magnetic ballasts.

Additionally, there are also 60-Watt and 75-Watt incandescent lamp fixtures in smaller areas such as the restroom, lime room, and Well 11. All interior lighting in the facility is controlled using wall switches.

Exterior lights in the facility include 250-Watt metal halide fixtures and are controlled by photocells.



Incandescent lamps



 $Exterior\ Metal\ Halide\ lamp\ fixture$





2.5 Heating Systems

DPW Plant 2 is heated using seven gas-fired, warm air unit heaters with capacity of 28 MBh and an efficiency of 80%. These units are in fair condition and within the useful life of the equipment. Temperature is controlled and maintained using a manual thermostat.

Well 11 is heated using one electric resistant heater with heating capacity of 2.2kW also controlled by a manual thermostat and is in good condition.



Warm Air Unit heater



Electric Resistance Heater



Manual Thermostat

2.6 Domestic Hot Water

Hot water is produced with a 30 gallon, 30 MBh gas-fired storage water heater with a 80% efficiency. The water heater serves the restroom and faucet and is in good condition.



Domestic Hot Water Heater





2.7 Water-Using Systems

There is one restroom in the facility with faucet flow rates are at 2.2 gallons per minute (gpm).

2.8 Process Equipment

The DPW Plant 2 has two 50 hp constant speed, and two 75 hp VFD equipped water supply pumps at the facility. The 75 hp pumps are high service pumps and are operated in a lead/lag arrangement. The 50 hp pumps are backwash pumps that are used infrequently or on an as needed basis. The water treatment process consists of a lime mixer constant speed motor of fractional horse power.

Well 11 has a 125 hp process pump that is also equipped with a VFD. All pumps are controlled by the central SCADA system located at the DPW Office.



DPW plant 2 Backwash Pumps



DPW plant 2 High Service Pumps



DPW plant 2 Water Treatment Equipment



Well 11 – 125 hp pump






3 ENERGY USE AND COSTS

Twelve months of utility billing data are used to develop annual energy consumption and cost data. This information creates a profile of the annual energy consumption and energy costs.

Utility Summary								
Fuel	Usage	Cost						
Electricity	222,448 kWh	\$47,152						
Natural Gas	7,128 Therms	\$8,338						
Total	\$55,490							

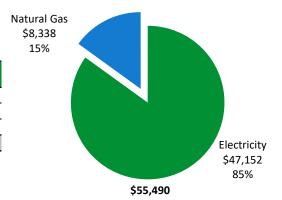

An energy balance identifies and quantifies energy use in your various building systems. This can highlight areas with the most potential for improvement. This energy balance was developed using calculated energy use for each of the end uses noted in the figure.

The energy auditor collects information regarding equipment operating hours, capacity, efficiency, and other operational parameters from facility staff, drawings, and on-site observations. This information is used as the inputs to calculate the existing conditions energy use for the site. The calculated energy use is then compared to the historical energy use and the initial inputs are revised, as necessary, to balance the calculated energy use to the historical energy use.





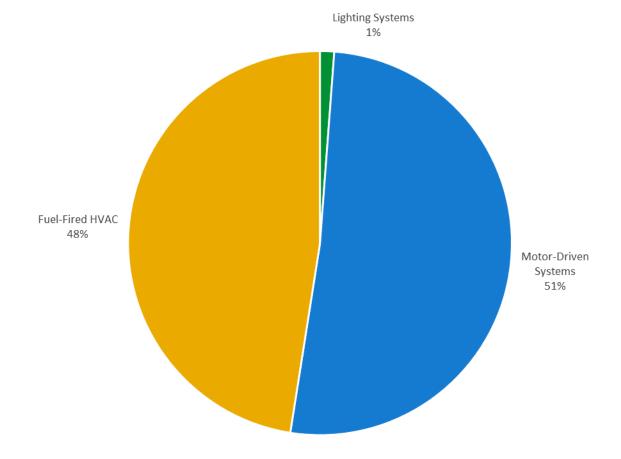



Figure 5 - Energy Balance





3.1 Electricity

Atlantic City Electric delivers electricity under rate class Monthly General Service Secondary, with electric production provided by NextEra Energy Services DC, LLC, a third-party supplier.

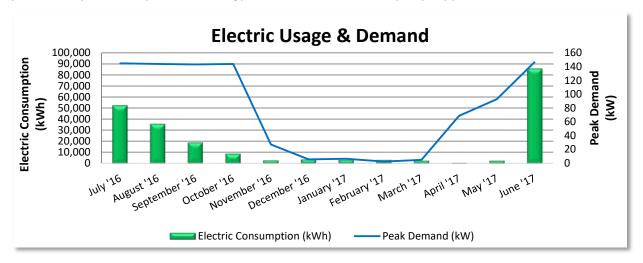

Electric Billing Data							
Period Ending	Days in Period	Electric Usage (kWh)	Demand (kW)	Demand Cost	Total Electric Cost		
8/12/16	30	52,814	145		\$9,271		
9/14/16	33	36,034	144		\$6,436		
10/14/16	30	19,253	143		\$3,602		
11/11/16	28	9,036	144		\$1,791		
12/13/16	32	3,024	27		\$8,040		
1/16/17	34	3,902	6		\$814		
2/11/17	26	3,447	6		\$658		
3/13/17	30	3,472	2		\$685		
4/12/17	30	2,748	5		\$629		
5/15/17	33	686	69		\$302		
6/14/17	30	2,785	93		\$784		
7/14/17	30	85,856	146		\$14,272		
Totals	366	223,057	146	\$0	\$47,281		
Annual	365	222,448	146	\$0	\$47,152		

Notes:


- Peak demand of 146 kW occurred in June 2017.
- The average electric cost over the past 12 months was \$0.212/kWh, which is the blended rate that includes energy supply, distribution, demand, and other charges. This report uses this blended rate to estimate energy cost savings.
- The data represents combined energy use for DPW Plant 2 as well as Well 11.





3.2 Natural Gas

South Jersey Gas delivers natural gas under rate class General Services.

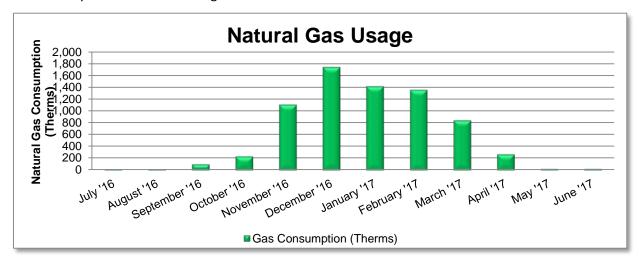

Gas Billing Data								
Period Ending	Days in Period	Natural Gas Usage (Therms)	Natural Gas Cost					
8/12/16	30	17	\$75					
9/14/16	33	17	\$75					
10/14/16	30	102	\$163					
11/11/16	28	235	\$289					
12/13/16	32	1,108	\$1,218					
1/16/17	34	1,741	\$2,000					
2/11/17	26	1,415	\$1,612					
3/13/17	30	1,357	\$1,487					
4/12/17	30	842	\$940					
5/15/17	33	269	\$334					
6/14/17	30	24	\$82					
7/14/17	30	23	\$85					
Totals	366	7,148	\$8,361					
Annual	365	7,128	\$8,338					

Notes:

- The average gas cost for the past 12 months is \$1.170/therm, which is the blended rate used throughout the analysis.
- The data represents combined natural gas use for DPW Plant 2 as well as Well 11.





3.3 Benchmarking

Your building was benchmarked using the United States Environmental Protection Agency's (EPA) *Portfolio Manager®* software. Benchmarking compares your building's energy use to that of similar buildings across the county, while neutralizing variations due to location, occupancy and operating hours. Some building types can be scored with a 1-100 ranking of a building's energy performance relative to the national building market. A score of 50 represents the national average and a score of 100 is best.

This ENERGY STAR® benchmarking score provides a comprehensive snapshot of your building's energy performance. It assesses the building's physical assets, operations, and occupant behavior, which is compiled into a quick and easy-to-understand score.

Benchmarking Score

N/A

Due to its unique characteristics, this building type is not able to receive a benchmarking score. This report contains suggestions about how to improve building performance and reduce energy costs.

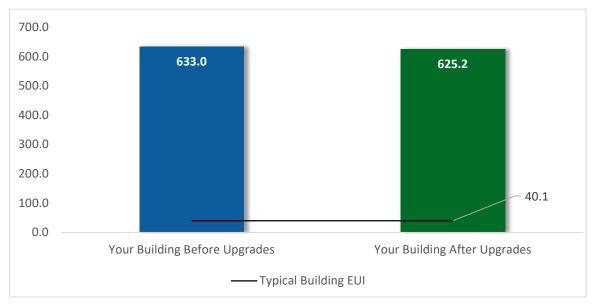


Figure 6 - Energy Use Intensity Comparison

Energy use intensity (EUI) measures energy consumption per square foot and is the standard metric for comparing buildings' energy performance. A lower EUI means better performance and less energy consumed. A number of factors can cause a building to vary from the "typical" energy usage. Local weather conditions, building age and insulation levels, equipment efficiency, daily occupancy hours, changes in occupancy throughout the year, equipment operating hours, and occupant behavior all contribute to a building's energy use and the benchmarking score.

For wastewater treatment plants the energy use intensity is the total source energy use of the property divided by the average influent flow (in gallons per day).





Tracking Your Energy Performance

Keeping track of your energy use on a monthly basis is one of the best ways to keep energy costs in check. Update your utility information in Portfolio Manager® regularly, so that you can keep track of your building's performance.

We have created a Portfolio Manager® account for your facility and we have already entered the monthly utility data shown above for you. Account login information for your account will be sent via email.

Free online training is available to help you use ENERGY STAR® Portfolio Manager® to track your building's performance at: https://www.energystar.gov/buildings/training.

For more information on ENERGY STAR® and Portfolio Manager®, visit their website³.

LGEA Report - Borough of Berlin DPW Plant 2, Well 11

³ https://www.energystar.gov/buildings/facility-owners-and-managers/existing-buildings/earn-recognition/energy-star-certification/how-app-1





4 ENERGY CONSERVATION MEASURES

The goal of this audit report is to identify and evaluate potential energy efficiency improvements, provide information about the cost effectiveness of those improvements, and recognize potential financial incentives from NJBPU. Most energy conservation measures have received preliminary analysis of feasibility which identifies expected ranges of savings and costs. This level of analysis is typically sufficient to demonstrate project cost-effectiveness and help prioritize energy measures.

Calculations of energy use and savings are based on the current version of the *New Jersey's Clean Energy Program Protocols to Measure Resource Savings*, which is approved by the NJBPU. Further analysis or investigation may be required to calculate more precise savings based on specific circumstances.

Operation and maintenance costs for the proposed new equipment will generally be lower than the current costs for the existing equipment—especially if the existing equipment is at or past its normal useful life. We have conservatively assumed there to be no impact on overall maintenance costs over the life of the equipment.

Financial incentives are based on the current NJCEP prescriptive SmartStart program. A higher level of investigation may be necessary to support any SmartStart Custom, Pay for Performance, or Direct Install incentive applications. Some measures and proposed upgrades may be eligible for higher incentives than those shown below through other NJCEP programs described in a following section of this report.

For a detailed list of the locations and recommended energy conservation measures for all inventoried equipment, see **Appendix A: Equipment Inventory & Recommendations.**





#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)		Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)		CO ₂ e Emissions Reduction (lbs)
Lightin	g Upgrades	3,274	1.4	0	\$692	\$4,621	\$626	\$3,995	5.8	3,276
ECM 1	Install LED Fixtures	2,707	0.4	0	\$574	\$2,898	\$300	\$2,598	4.5	2,726
ECM 2	Retrofit Fluorescent Fixtures with LED Lamps and Drivers	306	0.5	0	\$64	\$839	\$140	\$699	11.0	297
ECM 3	Retrofit Fixtures with LED Lamps	261	0.4	0	\$54	\$885	\$186	\$699	12.8	254
HVAC S	System Improvements	124	0.0	7	\$107	\$330	\$0	\$330	3.1	933
ECM 4	Install Programmable Thermostats	124	0.0	7	\$107	\$330	\$0	\$330	3.1	933
	TOTALS	3,398	1.4	7	\$799	\$4,951	\$626	\$4,325	5.4	4,209

^{* -} All incentives presented in this table are based on NJ SmartStart equipment incentives and assume proposed equipment meets minimum performance criteria for that program.

Figure 7 – All Evaluated ECMs

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)		Annual Energy Cost Savings (\$)		Estimated Incentive (\$)*	Estimated Net Cost (\$)		CO ₂ e Emissions Reduction (lbs)
Lightin	g Upgrades	3,274	1.4	0	\$692	\$4,621	\$626	\$3,995	5.8	3,276
ECM 1	Install LED Fixtures	2,707	0.4	0	\$574	\$2,898	\$300	\$2,598	4.5	2,726
ECM 2	Retrofit Fluorescent Fixtures with LED Lamps and Drivers	306	0.5	0	\$64	\$839	\$140	\$699	11.0	297
ECM 3	Retrofit Fixtures with LED Lamps	261	0.4	0	\$54	\$885	\$186	\$699	12.8	254
HVAC S	System Improvements	124	0.0	7	\$107	\$330	\$0	\$330	3.1	933
ECM 4	Install Programmable Thermostats	124	0.0	7	\$107	\$330	\$0	\$330	3.1	933
	TOTALS	3,398	1.4	7	\$799	\$4,951	\$626	\$4,325	5.4	4,209

^{* -} All incentives presented in this table are based on NJ SmartStart equipment incentives and assume proposed equipment meets minimum performance criteria for that program.

Figure 8 – Cost Effective ECMs

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).





4.1 Lighting

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)		Estimated Incentive (\$)*	Estimated Net Cost (\$)		Emissions Reduction
Lighting	Upgrades	3,274	1.4	0	\$692	\$4,621	\$626	\$3,995	5.8	3,276
ECM 1	Install LED Fixtures	2,707	0.4	0	\$574	\$2,898	\$300	\$2,598	4.5	2,726
FCM 2	Retrofit Fluorescent Fixtures with LED Lamps and Drivers	306	0.5	0	\$64	\$839	\$140	\$699	11.0	297
ECM 3	Retrofit Fixtures with LED Lamps	261	0.4	0	\$54	\$885	\$186	\$699	12.8	254

When considering lighting upgrades, we suggest using a comprehensive design approach that simultaneously upgrades lighting fixtures and controls to maximize energy savings and improve occupant lighting. Comprehensive design will also consider appropriate lighting levels for different space types to make sure that the right amount of light is delivered where needed. If conversion to LED light sources are proposed, we suggest converting all of a specific lighting type (e.g., linear fluorescent) to LED lamps to minimize the number of lamp types in use at the facility, which should help reduce future maintenance costs.

ECM 1: Install LED Fixtures

Replace existing exterior fixtures containing HID lamps with new LED light fixtures. This measure saves energy by installing LEDs which use less power than other technologies with a comparable light output.

In some cases, HID fixtures can be retrofit with screw-based LED lamps. Replacing an existing HID fixture with a new LED fixture will generally provide better overall lighting optics; however, replacing the HID lamp with a LED screw-in lamp is typically a less expensive retrofit. We recommend you work with your lighting contractor to determine which retrofit solution is best suited to your needs and will be compatible with the existing fixture(s).

Maintenance savings may also be achieved since LED lamps last longer than other light sources and therefore do not need to be replaced as often.

Affected building areas: exterior fixtures.

ECM 2: Retrofit Fluorescent Fixtures with LED Lamps and Drivers

Retrofit fluorescent fixtures by removing the fluorescent tubes and ballasts and replacing them with LED tubes and LED drivers (if necessary), which are designed to be used in retrofitted fluorescent fixtures.

The measure uses the existing fixture housing but replaces the electric components with more efficient lighting technology which use less power than other lighting technologies but provides equivalent lighting output. Maintenance savings may also be achieved since LED tubes last longer than fluorescent tubes and therefore do not need to be replaced as often.

Affected building areas: all areas with fluorescent fixtures with T12 tubes.





ECM 3: Retrofit Fixtures with LED Lamps

Replace fluorescent or incandescent lamps with LED lamps. Many LED tubes are direct replacements for existing fluorescent tubes and can be installed while leaving the fluorescent fixture ballast in place. LED lamps can be used in existing fixtures as a direct replacement for most other lighting technologies.

This measure saves energy by installing LEDs which use less power than other lighting technologies yet provide equivalent lighting output for the space. Maintenance savings may also be available, as longer-lasting LEDs lamps will not need to be replaced as often as the existing lamps.

Affected building areas: all areas with fluorescent fixtures with T8 tubes or incandescent lamps.

4.2 HVAC

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Savings		Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)		Net Cost		CO₂e Emissions Reduction (lbs)
HVAC S	ystem Improvements	124	0.0	7	\$107	\$330	\$0	\$330	3.1	933
ECM 4	Install Programmable Thermostats	124	0.0	7	\$107	\$330	\$0	\$330	3.1	933

ECM 4: Install Programmable Thermostats

Replace manual thermostats with programmable thermostats which provide energy savings by reducing heating and cooling energy usage when a room is unoccupied. Manual thermostats are generally adjusted to a single heating and cooling setpoint and left at that setting regardless of occupancy and they provide the same level of heating and cooling regardless of whether the space is being used. Programmable thermostats can maintain different temperature settings for different times of day and for different days of the week. By reducing heating temperature setpoints and raising cooling temperature setpoints when spaces are unoccupied, the operation of the HVAC equipment is reduced while maintaining comfortable space temperatures for building usage.





5 ENERGY EFFICIENT BEST PRACTICES

A whole building maintenance plan will extend equipment life; improve occupant comfort, health, and safety; and reduce energy and maintenance costs. You may already be doing some of these things— see our list below for potential additions to your maintenance plan. Be sure to consult with qualified equipment specialists for details on proper maintenance and system operation.

Energy Tracking with ENERGY STAR® Portfolio Manager®



You've heard it before - you can't manage what you don't measure. ENERGY STAR® Portfolio Manager® is an online tool that you can use to measure and track energy and water consumption, as well as greenhouse gas emissions⁴. Your account has already been established. Now you can continue to keep tabs on your energy performance every month.

Window Treatments/Coverings

Use high-reflectivity films or cover windows with shades or shutters to reduce solar heat gain and reduce the load on cooling and heating systems. Older, single pane windows and east or west-facing windows are especially prone to solar heat gain. In addition, use shades or shutters at night during cold weather to reduce heat loss.

Motor Maintenance

Motors have many moving parts. As these parts degrade over time, the efficiency of the motor is reduced. Routine maintenance prevents damage to motor components. Routine maintenance should include cleaning surfaces and ventilation openings on motors to prevent overheating, lubricating moving parts to reduce friction, inspecting belts and pulleys for wear and to ensure they are at proper alignment and tension, and cleaning and lubricating bearings. Consult a licensed technician to assess these and other motor maintenance strategies.

Water Heater Maintenance

Preventative maintenance can extend the life of the system, maintain energy efficiency, and ensure safe operation. At least once a year, follow manufacturer instructions to drain a few gallons out of the water heater using the drain valve. If there is a lot of sediment or debris, then a full flush is recommended. Turn the temperature down and then completely drain the tank. Annual checks should include checks for:

- Leaks or heavy corrosion on the pipes and valves.
- Corrosion or wear on the gas line and on the piping. If you noticed any black residue, soot, or charred metal, this is a sign you may be having combustion issues and you should have the unit serviced by a professional.

⁴ https://www.energystar.gov/buildings/facility-owners-and-managers/existing-buildings/use-portfolio-manager





- For electric water heaters, look for signs of leaking such as rust streaks or residue around the upper and lower panels covering the electrical components on the tank.
- For water heaters more than three years old, have a technician inspect the sacrificial anode annually.

Water Conservation



Installing dual flush or low-flow toilets and low-flow/waterless urinals are ways to reduce water use. The EPA WaterSense™ ratings for urinals is 0.5 gallons per flush (gpf) and for flush valve toilets is 1.28 gpf (this is lower than the current 1.6 gpf federal standard).

For more information regarding water conservation go to the EPA's WaterSense™ website⁵ or download a copy of EPA's "WaterSense™ at Work: Best Management

Practices for Commercial and Institutional Facilities" to get ideas for creating a water management plan and best practices for a wide range of water using systems.

Water conservation devices that do not reduce hot water consumption will not provide energy savings at the site level, but they may significantly affect your water and sewer usage costs. Any reduction in water use does however ultimately reduce grid-level electricity use since a significant amount of electricity is used to deliver water from reservoirs to end users.

If the facility has detached buildings with a master water meter for the entire campus, check for unnatural wet areas in the lawn or water seeping in the foundation at water pipe penetrations through the foundation. Periodically check overnight meter readings when the facility is unoccupied, and there is no other scheduled water usage.

Manage irrigation systems to use water more effectively outside the building. Adjust spray patterns so that water lands on intended lawns and plantings and not on pavement and walls. Consider installing an evapotranspiration irrigation controller that will prevent over-watering.

Procurement Strategies

Purchasing efficient products reduces energy costs without compromising quality. Consider modifying your procurement policies and language to require ENERGY STAR® or WaterSense™ products where available.

⁵ https://www.epa.gov/watersense

⁶ https://www.epa.gov/watersense/watersense-work-0





6 ON-SITE GENERATION

You don't have to look far in New Jersey to see one of the thousands of solar electric systems providing clean power to homes, businesses, schools, and government buildings. On-site generation includes both renewable (e.g., solar, wind) and non-renewable (e.g., fuel cells) technologies that generate power to meet all or a portion of the facility's electric energy needs. Also referred to as distributed generation, these systems contribute to greenhouse gas (GHG) emission reductions, demand reductions and reduced customer electricity purchases reduction, which results in improved electric grid reliability through better use of transmission and distribution systems.

Preliminary screenings were performed to determine if an on-site generation measure could be a cost-effective solution for your facility. Before deciding to install an on-site generation system, we recommend conducting a feasibility study to analyze existing energy profiles, siting, interconnection, and the costs associated with the generation project including interconnection costs, departing load charges, and any additional special facilities charges.

6.1 Solar Photovoltaic

Photovoltaic (PV) panels convert sunlight into electricity. Individual panels are combined into an array that produces direct current (DC) electricity. The DC current is converted to alternating current (AC) through an inverter. The inverter is then connected to the building's electrical distribution system.

This facility appears to not meet the minimum criteria for a cost-effective solar PV installation. To be cost-effective, a solar PV array needs certain minimum criteria, such as flat or south-facing rooftop or other unshaded space on which to place the PV panels.

The graphic below displays the results of the PV potential screening conducted as a part of this audit. The position of each slider indicates the potential (potential increases to the right) that each factor contributes to the overall site potential.

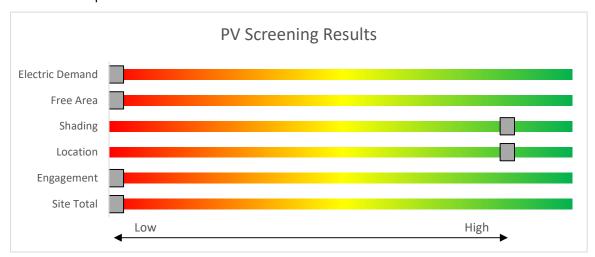


Figure 9 - Photovoltaic Screening





Solar Renewable Energy Certificate (SREC) Registration Program (SRP)

Rebates are not available for solar projects, but owners of solar projects MUST register their projects in the SREC Registration Program before starting construction. Once your PV system is up and running, you periodically earn credits, which can then be sold on the open market for up to 15 years.

If you are considering installing solar photovoltaics on your building, visit www.njcleanenergy.com/srec for more information about the SREC Registration Program.

Get more information about solar power in New Jersey or find a qualified solar installer who can help you decide if solar is right for your building:

- Basic Info on Solar PV in NJ: www.njcleanenergy.com/whysolar
- **NJ Solar Market FAQs**: www.njcleanenergy.com/renewable-energy/program-updates-and-background-information/solar-transition/solar-market-faqs
- Approved Solar Installers in the NJ Market: www.njcleanenergy.com/commercial-industrial/programs/nj-smartstart-buildings/tools-and-resources/tradeally/approved vendorsearch/?id=60&start=1





6.2 Combined Heat and Power

Combined heat and power (CHP) generates electricity at the facility and puts waste heat energy to good use. Common types of CHP systems are reciprocating engines, microturbines, fuel cells, backpressure steam turbines, and (at large facilities) gas turbines.

CHP systems typically produce a portion of the electric power used on-site, with the balance of electric power needs supplied by the local utility company. The heat is used to supplement (or replace) existing boilers and provide space heating and/or domestic hot water heating. Waste heat can also be routed through absorption chillers for space cooling.

The key criteria used for screening is the amount of time that the CHP system would operate at full load and the facility's ability to use the recovered heat. Facilities with a continuous need for large quantities of waste heat are the best candidates for CHP.

A preliminary screening based on heating and electrical demand, siting, and interconnection shows that the facility has no potential for installing a cost-effective CHP system.

The lack of gas service, low or infrequent thermal load, and lack of space for siting the equipment are the most significant factors contributing to the lack of CHP potential.

The graphic below displays the results of the CHP potential screening conducted as a part of this audit. The position of each slider indicates the potential (potential increases to the right) that each factor contributes to the overall site potential.

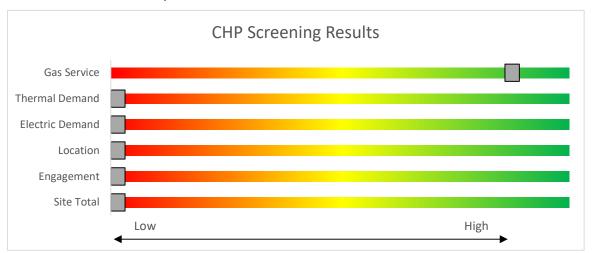


Figure 10 - Combined Heat and Power Screening

Find a qualified firm that specializes in commercial CHP cost assessment and installation: http://www.njcleanenergy.com/commercial-industrial/programs/nj-smartstart-buildings/tools-and-resources/tradeally/approved vendorsearch/.





7 Project Funding and Incentives

Ready to improve your building's performance? Pick the program that works best for you. Incentive programs that may apply to this facility are identified in the Executive Summary. This section provides an overview of currently available New Jersey's Clean Energy Programs.

	SmartStart Flexibility to install at your own pace	Direct Install Turnkey installation	Pay for Performance Whole building upgrades
Who should use it?	Buildings installing individual measures or small group of measures.	Small to mid-size facilities that can bundle multiple measures together.	Mid to large size facilities looking to implement as many measures as possible at one time.
		Average peak demand should be below 200 kW.	Peak demand should be over 200 kW.
		Not suitable for significant building shell issues.	
How does it work?	Use in-house staff or your preferred contractor.	Pre-approved contractors pass savings along to you via reduced material and labor costs.	Whole-building approach to energy upgrades designed to reduce energy use by at least 15%. The more you save, the higher the incentives.
What are the Incentives?	Fixed incentives for specific energy efficiency measures.	Incentives pay up to 70% of eligible costs, up to \$125,000 per project.	Up to 25% of installation cost, calculated based on level of energy savings per
		You pay the remaining 30% directly to the contractor.	square foot.
How do I participate?	Submit an application for the specific equipment to be installed.	Contact a participating contractor in your region.	Contact a pre-qualified Partner to develop your Energy Reduction Plan and set your energy savings targets.

Take the next step by visiting **www.njcleanenergy.com** for program details, applications, and to contact a qualified contractor.





7.1 SmartStart



SmartStart offers incentives for installing prescriptive and custom energy efficiency measures at your facility. This program provides an effective mechanism for securing incentives for energy efficiency measures installed individually or as part of a package of energy upgrades. This program serves most common equipment types and sizes.

SmartStart routinely adds, removes, or modifies incentives from year-to-year for various energy-efficient equipment based on market trends and new technologies.

Equipment with Prescriptive Incentives Currently Available:

Electric Chillers
Electric Unitary HVAC
Gas Cooling
Gas Heating
Gas Water Heating
Ground Source Heat Pumps
Lighting

Lighting Controls
Refrigeration Doors
Refrigeration Controls
Refrigerator/Freezer Motors
Food Service Equipment
Variable Frequency Drives

Incentives

The SmartStart Prescriptive program provides fixed incentives for specific energy efficiency measures. Prescriptive incentives vary by equipment type.

SmartStart Custom provides incentives for more unique or specialized technologies or systems that are not addressed through prescriptive incentives. Custom incentives are calculated at \$0.16/kWh and \$1.60/therm based on estimated annual savings. Incentives are capped at 50% of the total installed incremental project cost, or a project cost buy down to a one-year payback (whichever is less). Program incentives are capped at \$500,000 per electric account and \$500,000 per natural gas account, per fiscal year.

How to Participate

Submit an application for the specific equipment to be installed. Many applications are designed as rebates, although others require application approval prior to installation. You can work with your preferred contractor or use internal staff to install measures.

Visit <u>www.njcleanenergy.com/SSB</u> for a detailed program description, instructions for applying, and applications.





7.2 Direct Install



Direct Install is a turnkey program available to existing small to medium-sized facilities with an average peak electric demand that does not exceed 200 kW over the recent 12-month period. You work directly with a preapproved contractor who will perform a free energy assessment at your facility, identify specific eligible measures, and provide a clear scope of work for

installation of selected measures. Energy efficiency measures may include lighting and lighting controls, refrigeration, HVAC, motors, variable speed drives and controls.

Incentives

The program pays up to 70% of the total installed cost of eligible measures, up to \$125,000 per project. Each entity is limited to incentives up to \$250,000 per fiscal year.

How to Participate

To participate in Direct Install, you will need to contact the participating contractor assigned to the region of the state where your facility is located. A complete list of Direct Install program partners is provided on the Direct Install website linked below. The contractor will be paid the measure incentives directly by the program, which will pass on to you in the form of reduced material and implementation costs. This means up to 70% of eligible costs are covered by the program, subject to program caps and eligibility, while the remaining 30% of the cost is paid to the contractor by the customer.

Detailed program descriptions and applications can be found at: www.njcleanenergy.com/DI.





7.3 Energy Savings Improvement Program

The Energy Savings Improvement Program (ESIP) serves New Jersey's government agencies by financing energy projects. An ESIP is a type of performance contract, whereby school districts, counties, municipalities, housing authorities and other public and state entities enter in to contracts to help finance building energy upgrades. Annual payments are lower than the savings projected from the ECMs, ensuring that ESIP projects are cash flow positive for the life of the contract.

ESIP provides government agencies in New Jersey with a flexible tool to improve and reduce energy usage with minimal expenditure of new financial resources. NJCEP incentive programs described above can also be used to help further reduce the total project cost of eligible measures.

How to Participate

This LGEA report is the first step to participating in ESIP. Next, you will need to select an approach for implementing the desired ECMs:

- (1) Use an energy services company or "ESCO."
- (2) Use independent engineers and other specialists, or your own qualified staff, to provide and manage the requirements of the program through bonds or lease obligations.
- (3) Use a hybrid approach of the two options described above where the ESCO is used for some services and independent engineers, or other specialists or qualified staff, are used to deliver other requirements of the program.

After adopting a resolution with a chosen implementation approach, the development of the energy savings plan (ESP) can begin. The ESP demonstrates that the total project costs of the ECMs are offset by the energy savings over the financing term, not to exceed 15 years. The verified savings will then be used to pay for the financing.

The ESIP approach may not be appropriate for all energy conservation and energy efficiency improvements. Carefully consider all alternatives to develop an approach that best meets your needs. A detailed program description and application can be found at: www.njcleanenergy.com/ESIP.

ESIP is a program delivered directly by the NJBPU and is not an NJCEP incentive program. As mentioned above, you can use NJCEP incentive programs to help further reduce costs when developing the energy savings plan. Refer to the ESIP guidelines at the link above for further information and guidance on next steps.





7.4 SREC Registration Program

The SREC (Solar Renewable Energy Certificate) Registration Program (SRP) is used to register the intent to install solar projects in New Jersey. Rebates are not available for solar projects, but owners of solar projects *must* register their projects prior to the start of construction to establish the project's eligibility to earn SRECs. Registration of the intent to participate in New Jersey's solar marketplace provides market participants with information about the pipeline of anticipated new solar capacity and insight into future SREC pricing.

After the registration is accepted, construction is complete, and final paperwork has been submitted and is deemed complete, the project is issued a New Jersey certification number, which enables it to generate New Jersey SRECs. SRECs are generated once the solar project has been authorized to be energized by the Electric Distribution Company (EDC).

Each time a solar installation generates 1,000 kilowatt-hours (kWh) of electricity, an SREC is earned. Solar project owners report the energy production to the SREC Tracking System. This reporting allows SRECs to be placed in the customer's electronic account. SRECs can then be sold on the SREC Tracking System, providing revenue for the first 15 years of the project's life.

Electricity suppliers, the primary purchasers of SRECs, are required to pay a Solar Alternative Compliance Payment (SACP) if they do not meet the requirements of New Jersey's Solar Renewable Portfolio Standard. Purchasing SRECs can help them meet those requirements. As SRECs are traded in a competitive market, the price may vary significantly. The actual price of an SREC during a trading period fluctuates depending on supply and demand.

Information about the SRP can be found at: www.njcleanenergy.com/srec.





8 ENERGY PURCHASING AND PROCUREMENT STRATEGIES

8.1 Retail Electric Supply Options

Energy deregulation in New Jersey has increased energy buyers' options by separating the function of electricity distribution from that of electricity supply. So, though you may choose a different company from which to buy your electric power, responsibility for your facility's interconnection to the grid and repair to local power distribution will still reside with the traditional utility company serving your region.

If your facility is not purchasing electricity from a third-party supplier, consider shopping for a reduced rate from third-party electric suppliers. If your facility already buys electricity from a third-party supplier, review and compare prices at the end of each contract year.

A list of licensed third-party electric suppliers is available at the NJBPU website⁷.

8.2 Retail Natural Gas Supply Options

The natural gas market in New Jersey is also deregulated. Most customers that remain with the utility for natural gas service pay rates that are market-based and that fluctuate monthly. The utility provides basic gas supply service (BGSS) to customers who choose not to buy from a third-party supplier for natural gas commodity.

A customer's decision about whether to buy natural gas from a retail supplier typically depends on whether a customer prefers budget certainty and/or longer-term rate stability. Customers can secure longer-term fixed prices by signing up for service through a third-party retail natural gas supplier. Many larger natural gas customers may seek the assistance of a professional consultant to assist in their procurement process.

If your facility does not already purchase natural gas from a third-party supplier, consider shopping for a reduced rate from third-party natural gas suppliers. If your facility already purchases natural gas from a third-party supplier, review and compare prices at the end of each contract year.

A list of licensed third-party natural gas suppliers is available at the NJBPU website⁸.

⁷ www.state.nj.us/bpu/commercial/shopping.html.

⁸ www.state.nj.us/bpu/commercial/shopping.html





APPENDIX A: EQUIPMENT INVENTORY & RECOMMENDATIONS

Lighting Inventory & Recommendations

	Existin	g Conditions					Prop	osed Conditio	ns						Energy In	npact & F	inancial A	Analysis			
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add	Fixture Quantit Y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentive s	Simple Payback w/ Incentives in Years
DPW Plant 2 Pump room	8	Linear Fluorescent - T8: 8' T8 (59W) - 2L	Wall Switch	S	110	520	3	Relamp	No	8	LED - Linear Tubes: (2) 8' Lamps	Wall Switch	72	520	0.2	117	0	\$24	\$708	\$160	22.5
DPW Plant 2 Control room	4	Linear Fluorescent - T12: 4' T12 (40W) - 4L	Wall Switch	S	176	520	2	Relamp & Reballast	No	4	LED - Linear Tubes: (4) 4' Lamps	Wall Switch	58	520	0.3	182	0	\$38	\$473	\$80	10.4
DPW Plant 2 Restroom	1	Incandes cent: Screw-in 1 lamp	Wall Switch	S	75	520	3	Relamp	No	1	LED Screw-In Lamps: Screw-in 1 lamp	Wall Switch	11	520	0.0	25	0	\$5	\$17	\$1	3.2
DPW Plant 2 Electrical	2	Linear Fluorescent - T12: 4' T12 (40W) - 4L	Wall Switch	s	176	520	2	Relamp & Reballast	No	2	LED - Linear Tubes: (4) 4' Lamps	Wall Switch	58	520	0.2	91	0	\$19	\$237	\$40	10.4
DPW Plant 2 Electrical	1	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	s	114	520	3	Relamp	No	1	LED - Linear Tubes: (4) 4' Lamps	Wall Switch	58	520	0.0	22	0	\$4	\$73	\$20	11.8
DPW Plant 2 Lime room	4	Incandescent: Screw-in 1 lamp	Wall Switch	s	60	520	3	Relamp	No	4	LED Screw-In Lamps: Screw-in 1 lamp	Wall Switch	9	520	0.1	78	0	\$16	\$69	\$4	4.0
DPW Plant 2 Sodium hypo room	1	Incandescent: Screw-in 1 lamp	Wall Switch	S	60	520	3	Relamp	No	1	LED Screw-In Lamps: Screw-in 1 lamp	Wall Switch	9	520	0.0	20	0	\$4	\$17	\$1	4.0
Well 11 room	1	Linear Fluorescent - T12: 8' T12 (75W) - 2L	Wall Switch	S	158	520	2	Relamp & Reballast	No	1	LED - Linear Tubes: (2) 8' Lamps	Wall Switch	72	520	0.1	33	0	\$7	\$129	\$20	15.8
Well 11 - Exterior	3	Metal Halide: (1) 250W Lamp	Wall Switch		295	4,380	1	Fixture Replacement	No	3	LED - Fixtures: Outdoor Wall- Mounted Area Fixture	Wall Switch	89	4,380	0.4	2,707	0	\$574	\$2,898	\$300	4.5





Motor Inventory & Recommendations

	-	Existin	g Conditions						Prop	osed Co	nditions		Energy Im	pact & Fina	ancial Anal	lysis			
Location	Area(s)/System(s) Served	Motor Quantity	Motor Application		Full Load Efficiency		Remaining Useful Life	Operating	ECM#		Efficiency		Total Peak kW Savings	Total Annual	Total Annual MMBtu Savings		Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
DPW Plant 2	DPW Plant 2	2	Water Supply Pump	75.0	94.1%	Yes	w	1,100		No	94.1%	No	0.0	0	0	\$0	\$0	\$0	0.0
DPW Plant 2	DPW Plant 2	2	Water Supply Pump	50.0	93.0%	No	W	1,100		No	93.0%	No	0.0	0	0	\$0	\$0	\$0	0.0
DPW Plant 2	Lime mixer	1	Process Pump	0.5	60.0%	No	w	2,000		No	60.0%	No	0.0	0	0	\$0	\$0	\$0	0.0
Well 11	Well 11	1	Other	125.0	95.4%	Yes	В	1,350		No	95.4%	No	0.0	0	0	\$0	\$0	\$0	0.0

Electric HVAC Inventory & Recommendations

	-	Existin	g Conditions				Prop	osed Co	ndition	S					Energy Im	pact & Fina	ancial Ana	lysis			
Location	Area(s)/System(s) Served	System Quantity	System Type	Cooling Capacity per Unit (Tons)	Heating Capacity per Unit (MBh)	Remaining Useful Life	ECM#	Install High Efficiency System?	System Quantity	System Type	Cooling Capacity per Unit (Tons)	Heating Capacity per Unit (MBh)	Cooling Mode Efficiency (SEER/EER)	Heating Mode Efficiency (COP)		Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Well 11	Well 11	1	Electric Resistance Heat		7.50	w		No							0.0	0	0	\$0	\$0	\$0	0.0

Fuel Heating Inventory & Recommendations

		Existin	g Conditions			Prop	osed Co	ndition	S				Energy Im	pact & Fin	ancial Ana	ysis			
Location	, ,, ,	System Quantity	System Type		Remaining Useful Life	ECM#	Install High Efficiency System?	System Quantity	System Type	Output Capacity per Unit (MBh)	Heating Efficiency	Heating Efficiency Units		Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost		Simple Payback w/ Incentives in Years
DPW 2	DPW2	7	Warm Air Unit Heater	28.00	w		No						0.0	0	0	\$0	\$0	\$0	0.0

Programmable Thermostat Recommendations

		Reco	mmendat	tion Inputs			Energy Im	pact & Fina	ancial Ana	lysis			
Location	Area(s)/System(s) Affected	ECM#	Thermostat	Cooling Capacity of Controlled System (Tons)	Electric Heating Capacity of Controlled System (kBtu/hr)	Output Heating Capacity of Controlled System (MBh)		Total Annual	NANADtu	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
DPW 2	DPW 2	4	1.00	1.00	1.00	28.00	0.0	124	7	\$107	\$330	\$0	3.1





DHW Inventory & Recommendations

		Existin	g Conditions		Prop	osed Co	ndition	ıs			Energy Im	pact & Fin	ancial Ana	ysis			
Location	Area(s)/System(s) Served	System Quantity	System Type	Remaining Useful Life	ECM#	Replace?	System Quantity	System Type	Fuel Type	System Efficiency		Total Annual kWh Savings	MMRtu	Total Annual Energy Cost Savings			Simple Payback w/ Incentives in Years
DPW Plant 2	DPW Plant 2	1	Storage Tank Water Heater (≤50 Gal)	W		No					0.0	0	0	\$0	\$0	\$0	0.0

Plug Load Inventory


· iag zoaa iiitoiitoi				
	Existin	g Conditions		
Location	Quantity	Equipment Description	Energy Rate (W)	ENERGY STAR Qualified ?
Well 11	1	Desktop	145.0	Yes





APPENDIX B: ENERGY STAR® STATEMENT OF ENERGY PERFORMANCE

EUI is presented in terms of *site energy* and *source energy*. Site energy is the amount of fuel and electricity consumed by a building as reflected in utility bills. Source energy includes fuel consumed to generate electricity consumed at the site, factoring in electric production and distribution losses for the region.

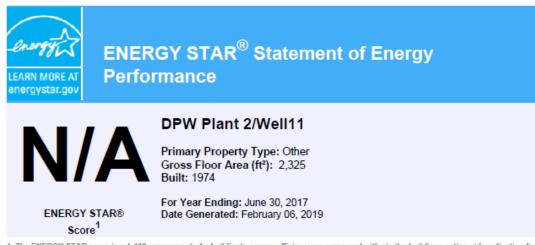

1. The ENERGY STAR score is a 1-100 assessment of a building's energy efficiency as compared with similar buildings nationwide, adjusting for climate and business activity.

Property & Contact Information				
Property Address DPW Plant 2/Well11 New Freedom-Watsontown Road Berlin, New Jersey 08010	Property Owner BERLIN BOROUGH 59 SOUTH WHITE HO BERLIN, NJ 08009	ORSE PIKE	Primary Contact Michael Kwasizur 59 SO White Horse Pike BERLIN, NJ 08009 856-767-7777 mkwasizur@berlinnj.org	
Property ID: 6682460				
Energy Consumption and Energy Us	se Intensity (EUI)			
Site EUI Annual Energy by Fue 610.7 kBtu/ft² Annual Energy by Fue Natural Gas (kBtu) Electric - Grid (kBtu) Source EUI 1,172.2 kBtu/ft²	714,516 (50%)	National Median Source EUI (kBtú/ft²) % Diff from National Median Source EUI Annual Emissions		46.5 89.3 1213% 109
Signature & Stamp of Verifying	g Professional			
(Name) verify tha	t the above information	is true and correct to	the best of my knowledge) <u>.</u>
Signature: Licensed Professional ()	Date:	Profession	nal Engineer Stamp	

(if applicable)

LGEA Report – Borough of Berlin DPW Plant 2, Well 11





APPENDIX C: GLOSSARY

TERM	DEFINITION		
Blended Rate	Used to calculate fiscal savings associated with measures. The blended rate is calculated by dividing the amount of your bill by the total energy use. For example, if your bill is \$22,217.22, and you used 266,400 kilowatt-hours, your blended rate is 8.3 cents per kilowatt-hour.		
Btu	British thermal unit: a unit of energy equal to the amount of heat required to increase the temperature of one pound of water by one-degree Fahrenheit.		
СНР	Combined heat and power. Also referred to as cogeneration.		
СОР	Coefficient of performance: a measure of efficiency in terms of useful energy delivered divided by total energy input.		
Demand Response	Demand response reduces or shifts electricity usage at or among participating buildings/sites during peak energy use periods in response to time-based rates or other forms of financial incentives.		
DCV	Demand control ventilation: a control strategy to limit the amount of outside air introduced to the conditioned space based on actual occupancy need.		
US DOE	United States Department of Energy		
EC Motor	Electronically commutated motor		
ЕСМ	Energy conservation measure		
EER	Energy efficiency ratio: a measure of efficiency in terms of cooling energy provided divided by electric input.		
EUI	Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance.		
Energy Efficiency	Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service.		
ENERGY STAR®	ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA.		
EPA	United States Environmental Protection Agency		
Generation	The process of generating electric power from sources of primary energy (e.g., natura gas, the sun, oil).		
GHG	Greenhouse gases: gases that are transparent to solar (short-wave) radiation but opaque to long-wave (infrared) radiation, thus preventing long-wave radiant energy from leaving Earth's atmosphere. The net effect is a trapping of absorbed radiation and a tendency to warm the planet's surface.		
gpf	Gallons per flush		
·			





gpm	Gallon per minute
HID	High intensity discharge: high-output lighting lamps such as high-pressure sodium, metal halide, and mercury vapor.
hp	Horsepower
HPS	High-pressure sodium: a type of HID lamp.
HSPF	Heating seasonal performance factor: a measure of efficiency typically applied to heat pumps. Heating energy provided divided by seasonal energy input.
HVAC	Heating, ventilating, and air conditioning
IHP 2014	US DOE Integral Horsepower rule. The current ruling regarding required electric motor efficiency.
IPLV	Integrated part load value: a measure of the part load efficiency usually applied to chillers.
kBtu	One thousand British thermal units
kW	Kilowatt: equal to 1,000 Watts.
kWh	Kilowatt-hour: 1,000 Watts of power expended over one hour.
LED	Light emitting diode: a high-efficiency source of light with a long lamp life.
LGEA	Local Government Energy Audit
Load	The total power a building or system is using at any given time.
Measure	A single activity, or installation of a single type of equipment, that is implemented in a building system to reduce total energy consumption.
МН	Metal halide: a type of HID lamp.
MBh	Thousand Btu per hour
MBtu	One thousand British thermal units
MMBtu	One million British thermal units
MV	Mercury Vapor: a type of HID lamp.
NJBPU	New Jersey Board of Public Utilities
NJCEP	New Jersey's Clean Energy Program: NJCEP is a statewide program that offers financial incentives, programs and services for New Jersey residents, business owners and local governments to help them save energy, money and the environment.
psig	Pounds per square inch gauge
Plug Load	Refers to the amount of power used in a space by products that are powered by means of an ordinary AC plug.
PV	Photovoltaic: refers to an electronic device capable of converting incident light directly into electricity (direct current).





SEER	Seasonal energy efficiency ratio: a measure of efficiency in terms of annual cooling energy provided divided by total electric input.
SEP	Statement of energy performance: a summary document from the ENERGY STAR® Portfolio Manager®.
Simple Payback	The amount of time needed to recoup the funds expended in an investment or to reach the break-even point between investment and savings.
SREC	Solar renewable energy credit: a credit you can earn from the state for energy produced from a photovoltaic array.
T5, T8, T12	A reference to a linear lamp diameter. The number represents increments of $1/8^{\text{th}}$ of an inch.
Temperature Setpoint	The temperature at which a temperature regulating device (thermostat, for example) has been set.
therm	100,000 Btu. Typically used as a measure of natural gas consumption.
tons	A unit of cooling capacity equal to 12,000 Btu/hr.
Turnkey	Provision of a complete product or service that is ready for immediate use.
VAV	Variable air volume
VFD	Variable frequency drive: a controller used to vary the speed of an electric motor.
WaterSense™	The symbol for water efficiency. The WaterSense™ program is managed by the EPA.
Watt (W)	Unit of power commonly used to measure electricity use.



