

Local Government Energy Audit: Energy Audit Report





Copyright ©2017 TRC Energy Services. All rights reserved.

Reproduction or distribution of the whole, or any part of the contents of this document without written permission of TRC is prohibited. Neither TRC nor any of its employees makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any data, information, method, product or process disclosed in this document, or represents that its use will not infringe upon any privately-owned rights, including but not limited to, patents, trademarks or copyrights.

Childs Kirk Memorial Park

I Biscayne Road

Egg Harbor Township, NJ 08234

Egg Harbor Township

March 1, 2018

Draft Report by:

TRC Energy Services

Disclaimer

The intent of this energy analysis report is to identify energy savings opportunities and recommend upgrades to the facility's energy using equipment and systems. Approximate saving are included in this report to help make decisions about reducing energy use at the facility. This report, however, is not intended to serve as a detailed engineering design document. Further design and analysis may be necessary in order to implement some of the measures recommended in this report.

The energy conservation measures and estimates of energy savings have been reviewed for technical accuracy. However, estimates of final energy savings are not guaranteed, because final savings may depend on behavioral factors and other uncontrollable variables. TRC Energy Services and New Jersey Board of Public Utilities (NJBPU) shall in no event be liable should the actual energy savings vary.

Estimated installation costs are based on TRC's experience at similar facilities, pricing from local contractors and vendors, and/or cost estimates from *RS Means*. The owner of the facility is encouraged to independently confirm these cost estimates and to obtain multiple estimates when considering measure installations. Since actual installed costs can vary widely for certain measures and conditions, TRC and NJBPU do not guarantee installed cost estimates and shall in no event be held liable should actual installed costs vary from estimates.

New Jersey's Clean Energy Program (NJCEP) incentive values provided in this report are estimates based on program information available at the time of the report. Incentive levels are not guaranteed. The NJBPU reserves the right to extend, modify, or terminate programs without prior notice. The owner of the facility should review available program incentives and eligibility requirements prior to selecting and installing any energy conservation measures.





Table of Contents

1	Execu	tive Summary	6
	1.1	Facility Summary	
	1.2	Your Cost Reduction Opportunities	6
	Ene	rgy Conservation Measures	6
		rgy Efficient Practices	
	On-	Site Generation Measures	
	1.3	Implementation Planning	
2	Facilit	y Information and Existing Conditions	10
	2.1	Project Contacts	10
	2.2	General Site Information	10
	2.3	Building Occupancy	10
	2.4	Building Envelope	10
	2.5	On-Site Generation	
	2.6	Energy-Using Systems	11
	Ligh	ting System	11
	Elec	tric HVAC	11
		nestic Hot Water Heating System	
		d Service Equipment	
		rigerationding Plug Loadding Plug Load	
2	2.7	Water-Using Systems	
3	Site	nergy Use and Costs	14
	3.1	Total Cost of Energy	
	3.2	Electricity Usage	
	3.3	Benchmarking	
	3.4	Energy End-Use Breakdown	
4	Energ	y Conservation Measures	18
	4.1	Recommended ECMs	18
	4.1.1	Lighting Upgrades	18
	ECM	11: Retrofit Fixtures with LED Lamps	19
	4.1.2	Food Service Equipment & Refrigeration Measures	19
	ECM	1 2: Replace Refrigeration Equipment	20
	4.2	ECMs Evaluated But Not Recommended	20
	Inst	all LED Fixtures	21
		all Occupancy Sensor Lighting Controls	
5	Energ	y Efficient Practices	23
	Perf	form Proper Lighting Maintenance	23
		elop a Lighting Maintenance Schedule	
	Perf	form Proper Water Heater Maintenance	23





	Wate	r Conservation	23
6	On-Site	Generation Measures	25
	6.1	Photovoltaic	25
	6.2	Combined Heat and Power	26
7	Deman	d Response	28
8		Funding / Incentives	
	8.1	SmartStart	29
	8.2	Direct Install	30
	8.3	Energy Savings Improvement Program	31
	8.4	Demand Response Energy Aggregator	32
9	Energy	Purchasing and Procurement Strategies	33
	9.1	Retail Electric Supply Options	33
	9.2	Retail Natural Gas Supply Options	33

Appendix A: Equipment Inventory & Recommendations





Table of Figures

Figure 1 – Previous 12 Month Utility Costs	6
Figure 2 – Potential Post-Implementation Costs	7
Figure 3 – Summary of Energy Reduction Opportunities	7
Figure 4 – Project Contacts	10
Figure 5 - Building Schedule	10
Figure 6 - Utility Summary	14
Figure 7 - Energy Cost Breakdown	14
Figure 8 - Graph of 12 Months Electric Usage & Demand	15
Figure 9 - Table of 12 Months Electric Usage & Demand	15
Figure 10 - Energy Use Intensity Comparison — Existing Conditions	16
Figure 11 - Energy Use Intensity Comparison — Following Installation of Recommended Measures	16
Figure 12 - Energy Balance (% and kBtu/SF)	17
Figure 13 – Summary of Recommended ECMs	18
Figure 14 – Summary of Lighting Upgrade ECMs	19
Figure 15 - Summary of Food Service Equipment & Refrigeration ECMs	19
Figure 16 – Summary of Measures Evaluated, But Not Recommended	20
Figure 17 - Photovoltaic Screening	25
Figure 18 - Combined Heat and Power Screening	26
Figure 19 - ECM Incentive Program Eligibility	29





I EXECUTIVE SUMMARY

The New Jersey Board of Public Utilities (NJBPU) has sponsored this Local Government Energy Audit (LGEA) Report for Egg Harbor Township.

The goal of an LGEA report is to provide you with information on how your facility uses energy, identify energy conservation measures (ECMs) that can reduce your energy use, and provide information and assistance to help facilities implement ECMs. The LGEA report also contains valuable information on financial incentives from New Jersey's Clean Energy Program (NJCEP) for implementing ECMs.

This study was conducted by TRC Energy Services, as part of a comprehensive effort to assist New Jersey local governments in controlling energy costs and protecting our environment by offering a wide range of energy management options and advice.

I.I Facility Summary

Egg Harbor Township Childs Kirk Park has a 3,400 square foot building that includes concessions, restrooms and team meeting rooms. The park is closed down about 4 months out of the year in the winter and the space is said to be minimally heated during this time. The park itself has sports field lighting. The park is used for recreational purposes by the community which include many baseball fields that have seasonal use. The park is generally open between 8AM and 9PM every day of the week with varying use. A thorough description of the facility and our observations are located in Section 2.

1.2 Your Cost Reduction Opportunities

Energy Conservation Measures

TRC Energy Services recommends 2 measures which together represent an opportunity for Egg Harbor Township to reduce annual energy costs by roughly \$826 and annual greenhouse gas emissions by 3,946 lbs CO₂e. We estimate that if all measures were implemented as recommended, the project would pay for itself in roughly 7.1 years. The breakdown of existing and potential utility costs after project implementation are illustrated in Figure 1 and Figure 2, respectively. Together these measures represent an opportunity to reduce Egg Harbor Township's annual energy costs by 13%.




Figure 1 - Previous 12 Month Utility Costs





Figure 2 – Potential Post-Implementation Costs (Total Project Measures with 85 year payback)

Figure 3 – Potential Post-Implementation Costs (High Priority Measures with 7.1 year payback)



A detailed description of Egg Harbor Township's existing energy use can be found in Section 3 "Site Energy Use and Costs".

Estimates of the total cost, energy savings, and financial incentives for the proposed energy efficient upgrades are summarized below in Figure 4. . A brief description of each category can be found below and a description of savings opportunities can be found in Section 4, "Energy Conservation Measures".

Figure 4 – Summary of Energy Reduction Opportunities

	Energy Conservation Measure	Recommend?	Annual Electric Savings (kWh)	Peak Demand Savings (kW)		Energy Cost	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)		CO₂e Emissions Reduction (lbs)
	Lighting Upgrades		4,365	1.2	0.0	\$920.14	\$104,025.00	\$750.00	\$103,275.00	112.2	4,395
	Install LED Fixtures	No	1,775	0.0	0.0	\$374.17	\$100,000.00	\$250.00	\$99,750.00	266.6	1,787
ECM 1	Retrofit Fix tures with LED Lamps	Yes	2,590	1.2	0.0	\$545.97	\$4,025.00	\$500.00	\$3,525.00	6.5	2,608
	Lighting Control Measures		289	0.2	0.0	\$61.01	\$1,350.00	\$175.00	\$1,175.00	19.3	291
	Install Occupancy Sensor Lighting Controls	No	289	0.2	0.0	\$61.01	\$1,350.00	\$175.00	\$1,175.00	19.3	291
Food Service Equipment & Refrigeration Measures			1,328	0.2	0.0	\$279.99	\$2,300.00	\$0.00	\$2,300.00	8.2	1,338
ECM 2	Replace Refrigeration Equipment	Yes	1,328	0.2	0.0	\$279.99	\$2,300.00	\$0.00	\$2,300.00	8.2	1,338
	TOTALS (High Priority Measures)				0.0	\$825.96	\$6,325.00	\$500.00	\$5,825.00	7.1	3,946

^{* -} All incentives presented in this table are based on NJ Smart Start Building equipment incentives and assume proposed equipment meets minimum performance criteria for that program.

Lighting Upgrades generally involve the replacement of existing lighting components such as lamps and ballasts (or the entire fixture) with higher efficiency lighting components. These measure save energy by reducing the power used by the lighting components due to improved electrical efficiency.

Lighting Controls measures generally involve the installation of automated controls to turn off lights or reduce light output when not needed. Automated control reduces reliance on occupant behavior for adjusting lights. These measures save energy by reducing the amount of time lights are on.

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).





Food Service Equipment & Refrigeration measures generally involve improvements in the efficiency of cooking, food service, dishwashing, and food storage equipment. These measures may include more efficient convection ovens, steamers, ice machines, or refrigeration. These measures save energy by reducing the energy usage with more energy efficient equipment.

Energy Efficient Practices

TRC Energy Services also identified 4 low cost or no cost energy efficient practices. A facility's energy performance can be significantly improved by employing certain behavioral or operational adjustments and by performing better routine maintenance on building systems. These practices can extend equipment lifetime, improve occupant comfort, provide better health and safety, as well as reduce annual energy and O&M costs. Potential opportunities identified at Egg Harbor Township include:

- Perform Proper Lighting Maintenance
- Develop a Lighting Maintenance Schedule
- Perform Proper Water Heater Maintenance
- Water Conservation

For details on these Energy Efficient Practices, please refer to section 5.

On-Site Generation Measures

TRC Energy Services evaluated the potential for installing on-Site generation for Egg Harbor Township. Based on the configuration of the site and its loads there is a low potential for installing any PV and combined heat and power self-generation measures.

For details on our evaluation and on-site generation potential, please refer to section 6.

1.3 Implementation Planning

To realize the energy savings from the ECMs listed in this report, a project implementation plan must be developed. Available capital must be considered and decisions need to be made whether it is best to pursue individual ECMs separately, groups of ECMs, or a comprehensive approach where all ECMs are implemented together, possibly in conjunction with other facility upgrades or improvements.

Rebates, incentives, and financing are available from NJCEP, as well as other sources, to help reduce the costs associated with the implementation of energy efficiency projects. Prior to implementing any measure, please review the relevant incentive program guidelines before proceeding. This is important because in most cases you will need to submit applications for the incentives prior to purchasing materials or commencing with installation.

The ECMs outlined in this report may qualify under the following program(s):

- SmartStart (SS)
- Direct Install (DI)

For facilities wanting to pursue only selected individual measures (or planning to phase implementation of selected measures over multiple years), incentives are available through the SmartStart program. To participate in this program you may utilize internal resources, or an outside firm or contractor, to do the final design of the ECM(s) and do the installation. Program pre-approval is required for some SS incentives, so only after receiving pre-approval should you proceed with ECM installation. The incentive estimates





listed above in Figure 4 are based on the SS program. More details on this program and others are available in Section 8.

This facility may also qualify for the Direct Install program which can provide turnkey installation of multiple measures, through an authorized network of participating contractors. This program can provide substantially higher incentives that SmartStart, up to 70% of the cost of selected measures, although measure eligibility will have to be assessed and be verified by the designated DI contractor and, in most cases, they will perform the installation work.

For larger facilities with limited capital availability to implement ECMs, project financing may be available through the Energy Savings Improvement Program (ESIP). Supported directly by the NJBPU, ESIP provides government agencies with project development, design, and implementation support services, as well as, attractive financing for implementing ECMs. An LGEA report (or other approved energy audit) is required for participation in ESIP. Please refer to Section 8.3 for additional information on the ESIP Program.

The Demand Response Energy Aggregator is a (non-NJCEP) program designed to reduce electric loads at commercial facilities, when wholesale electricity prices are high or when the reliability of the electric grid is threatened due to peak power demand. Demand Response (DR) service providers (a.k.a. Curtailment Service Providers) are registered with PJM, the independent system operator (ISO) for mid-Atlantic state region that is charged with maintaining electric grid reliability. By enabling grid operators to call upon commercial facilities to reduce their electric usage during times of peak demand, the grid is made more reliable and overall transmission costs are reduced for all ratepayers. Curtailment Service Providers provide regular payments to medium and large consumers of electric power for their participation in DR programs. Program participation is voluntary and facilities receive payments whether or not they are called upon to curtail their load during times of peak demand. Refer to Section 7 for additional information on this program.

Additional information on relevant incentive programs is located in Section 8. You may also check the following website for more details: www.njcleanenergy.com/ci





2 FACILITY INFORMATION AND EXISTING CONDITIONS

2.1 Project Contacts

Figure 5 - Project Contacts

Name	Role	E-Mail	Phone #					
Customer								
Matthew von der Hayden	Deputy Administrator	MVonDerHayden@ehtgov.org	609-926-4044					
Sam Gioconda	Division Manager, Buildings & Grounds	sgioconda@ehtgov.org	609-926-3838					
TRC Energy Services								
Aimee Lalonde	Auditor	Alalonde@trcsolutions.com	732-855-0033					

2.2 General Site Information

On September 29, 2017, TRC Energy Services performed an energy audit at Egg Harbor Township located in Egg Harbor Township, NJ. TRC Energy Services' team met with Matt & Sam to review the facility operations and help focus our investigation on specific energy-using systems.

Egg Harbor Township Childs Kirk Park has a 3,400 square foot building that includes concessions, restrooms and team meeting rooms. The park is closed down about 4 months out of the year in the winter and the space is said to be minimally heated during this time. The park itself has sports field lighting. The park is used for recreational purposes by the community which include six (6) baseball fields that have seasonal use. The building was constructed in 2009 and is in good condition.

2.3 Building Occupancy

The park is generally open between 8AM and 9PM every day of the week with varying use. The typical schedule is presented in the table below.

Figure 6 - Building Schedule

Building Name	Weekday/Weekend	Operating Schedule			
Childs Kirk Memorial Park	Weekday	8 AM to 9 PM			
Childs Kirk Memorial Park	Weekend	11 AM to 6 PM			

2.4 Building Envelope

The building at Childs Kirk Park is constructed of concrete block, and structural steel with a stone facade. The building has pitched roofs and appears to be in good condition. The buildings have double pane windows which are in good condition and show little sign of excessive infiltration. The exterior doors are constructed of aluminum and in good condition.

2.5 On-Site Generation

Egg Harbor Township Childs Kirk Park does not have any on-site electric generation capacity.





2.6 Energy-Using Systems

Lighting System

Lighting in the building is provided by linear 32 Watt fluorescent T8 lamp surface mounted wrap fixtures with electronic ballasts. These are manually controlled by wall switches. There are also exterior building mounted high pressure sodium lamp fixtures which are on a timeclock.



The field lights are tall pole mounted stadium style lighting that include 1500 Watt metal halide lamps and ballasts. These were of interest by the facility, however due to their low usage – are not cost effective to be upgraded to LED technology.



Please see **Appendix A: Equipment Inventory & Recommendations** for an inventory of the facility's lighting equipment.

Electric HVAC

There is a through the wall air conditioner that is of standard efficiency and fair condition. This serves the trophy room and has minimal use. We recommend replacing with a high efficiency energy star unit of the same capacity once it reaches the end of its useful life. In the meantime, we recommend cleaning the filter as part of general good maintenance practice. There are wall mounted electric cabinet heaters that are in fair condition. They serve the trophy room and only meet the heating space temperature set point of 50 degrees in the winter.







Please see **Appendix A: Equipment Inventory & Recommendations** for an inventory of the facility's electric HVAC equipment.

Domestic Hot Water Heating System

The domestic hot water heating system for the building consists of an electric storage tank water heater with an input rating of 30 kW. The water heater has a 30 gallon storage tank and is in good condition.



Please see **Appendix A: Equipment Inventory & Recommendations** for an inventory of the facility's domestic hot water equipment.

Food Service Equipment

The building has an all-electric kitchen that is used as a concession stand for the park. This includes two (2) electric ovens and other general café equipment which are provided in the plug load section of this report. There is also an under the counter dishwashing machine that is minimally used.







Please see **Appendix A: Equipment Inventory & Recommendations** for an inventory of the facility's food service and laundry equipment.

Refrigeration

The building has a large number of refrigeration equipment. These vary in condition, efficiency and percent utilized. We recommend replacing these with high efficiency energy star equipment as they reach the end of their useful life. We also recommend practicing refrigeration equipment management. There were several units that were on and only partially filled. Consolidating the contents and taking a unit offline when the opportunity presents itself is a no-cost way to reduce your electrical consumption.



There is a freezer chest that is in poor condition and low efficiency. There is an opportunity for energy savings by replacing this unit.

Please see **Appendix A: Equipment Inventory & Recommendations** for an inventory of the facility's refrigeration equipment.

Building Plug Load

The building plug loads include general café equipment.

Please see **Appendix A: Equipment Inventory & Recommendations** for an inventory of the facility's plug load equipment.

2.7 Water-Using Systems

There are restrooms at this facility and the sinks within them are all currently fit with low flow aerators.





3 SITE ENERGY USE AND COSTS

Utility data for Electricity was analyzed to identify opportunities for savings. In addition, data for Electricity was evaluated to determine the annual energy performance metrics for the building in energy cost per square foot and energy usage per square foot. These metrics are an estimate of the relative energy efficiency of this building. There are a number of factors that could cause the energy use of this building to vary from the "typical" energy usage profile for facilities with similar characteristics. Local weather conditions, building age and insulation levels, equipment efficiency, daily occupancy hours, changes in occupancy throughout the year, equipment operating hours, and energy efficient behavior of occupants all contribute to benchmarking scores. Please refer to the Benchmarking section within Section 3.3 for additional information.

3.1 Total Cost of Energy

The following energy consumption and cost data is based on the last 12-month period of utility billing data that was provided for each utility. A profile of the annual energy consumption and energy cost of the facility was developed from this information.

Figure 7 - Utility Summary

Utility Summary for Egg Harbor Township								
Fuel	Usage	Cost						
Electricity	31,115 kWh	\$6,559						
Total	\$6,559							

The current annual energy cost for this facility is \$6,559 as shown in the chart below.

Electric \$6,559 100% \$6,559

Figure 8 - Energy Cost Breakdown





3.2 Electricity Usage

Electricity is provided by Atlantic City Electric. The average electric cost over the past 12 months was \$0.211/kWh, which is the blended rate that includes energy supply, distribution, and other charges. This rate is used throughout the analyses in this report to assess energy costs and savings. The facility pays electric demand charges. The monthly electricity consumption and peak demand are shown in the chart below.

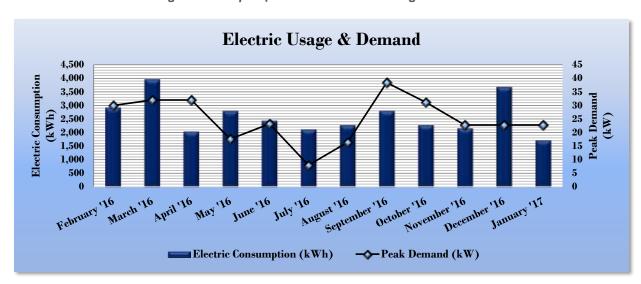


Figure 9 - Graph of 12 Months Electric Usage & Demand

Figure 10 - Table of 12 Months Electric Usage & Demand

	Electric Billing Data for Egg Harbor Township											
Period Ending	Days in Period	Electric Usage (kWh)	Demand (kW)	Demand Cost	Total Electric Cost							
3/14/16	34	2,920	30	\$128	\$654							
4/12/16	29	3,960	32	\$151	\$862							
5/10/16	28	2,040	32	\$124	\$492							
6/10/16	31	2,800	18	\$82	\$567							
7/13/16	33	2,440	23	\$116	\$525							
8/12/16	30	2,120	8	\$32	\$388							
9/12/16	31	2,280	16	\$71	\$460							
10/12/16	30	2,800	38	\$155	\$631							
11/9/16	28	2,280	31	\$100	\$486							
12/9/16	30	2,160	23	\$74	\$440							
1/13/17	35	3,680	23	\$90	\$709							
2/9/17	27	1,720	23	\$72	\$363							
Totals	366	31,200	38.4	\$1,195	\$6,577							
Annual	365	31,115	38.4	\$1,192	\$6,559							





3.3 Benchmarking

This facility was benchmarked using *Portfolio Manager*, an online tool created and managed by the U.S. Environmental Protection Agency (EPA) through the ENERGY STAR™ program. Portfolio Manager analyzes your building's consumption data, cost information, and operational use details and then compares its performance against a national median for similar buildings of its type. Metrics provided by this analysis are Energy Use Intensity (EUI) and an ENERGY STAR Score for select building types.

Energy Use Intensity is a measure of a facility's energy consumption per square foot, and it is the standard metric for comparing buildings' energy performance. Comparing the EUI of a building with the national median EUI for that building type illustrates whether that building uses more or less energy than similar buildings of its type on a square foot basis. EUI is presented in terms of "site energy" and "source energy". Site energy is the amount of fuel and electricity consumed by a building as reflected in utility bills. Source energy includes fuel consumed to generate electricity consumed at the site, factoring in electric production and distribution losses for the region.

Figure 11 - Energy Use Intensity Comparison - Existing Conditions

Energy Use Intensity Comparison - Existing Conditions									
	Egg Harbor Township	National Median							
	Egg Harbor Township	Building Type: Rec./Entertainment/Parks							
Source Energy Use Intensity (kBtu/ft²)	98.0	96.8							
Site Energy Use Intensity (kBtu/ft²)	31.2	41.2							

Implementation of all recommended measures in this report would improve the building's estimated EUI significantly, as shown in the Table below:

Figure 12 - Energy Use Intensity Comparison - Following Installation of Recommended Measures

Energy Use Intensity Comparison - Following Installation of Recommended Measures									
	Egg Harbor Township	National Median							
	Egg Harbor Township	Building Type: Rec./Entertainment/Parks							
Source Energy Use Intensity (kBtu/ft²)	85.7	96.8							
Site Energy Use Intensity (kBtu/ft²)	27.3	41.2							

Many types of commercial buildings are also eligible to receive an ENERGY STAR™ score. This score is a percentile ranking from 1 to 100. It compares your building's energy performance to similar buildings nationwide. A score of 50 represents median energy performance, while a score of 75 means your building performs better than 75 percent of all similar buildings nationwide and may be eligible for ENERGY STAR® certification. Your building is not is one of the building categories that are eligible to receive a score.





3.4 Energy End-Use Breakdown

In order to provide a complete overview of energy consumption across building systems, an energy balance was performed at this facility. An energy balance utilizes standard practice engineering methods to evaluate all components of the various electric and fuel-fired systems found in a building to determine their proportional contribution to overall building energy usage. This chart of energy end uses highlights the relative contribution of each equipment category to total energy usage. This can help determine where the greatest benefits might be found from energy efficiency measures.

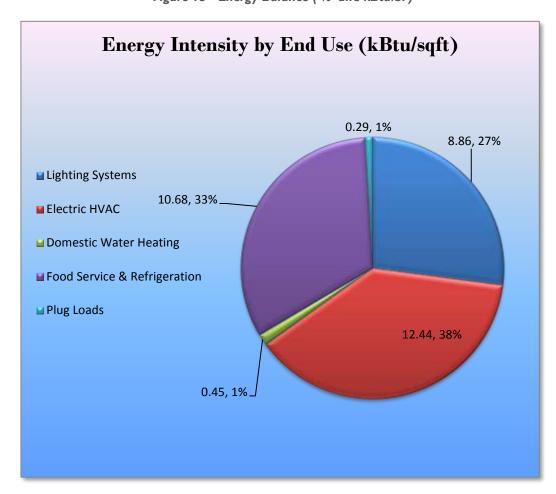


Figure 13 - Energy Balance (% and kBtu/SF)





4 ENERGY CONSERVATION MEASURES

Level of Analysis

The goal of this audit report is to identify potential energy efficiency opportunities, help prioritize specific measures for implementation, and provide information to the Egg Harbor Township regarding financial incentives for which they may qualify to implement the recommended measures. For this audit report, most measures have received only a preliminary analysis of feasibility which identifies expected ranges of savings and costs. This level of analysis is usually considered sufficient to demonstrate project cost-effectiveness and help prioritize energy measures. Savings are based on the New Jersey Clean Energy Program Protocols to Measure Resource Savings dated May 31, 2016, approved by the New Jersey Board of Public Utilities. Further analysis or investigation may be required to calculate more precise savings based on specific circumstances. A higher level of investigation may be necessary to support any custom SmartStart or Pay for Performance, or Direct Install incentive applications. Financial incentives for the ECMs identified in this report have been calculated based the NJCEP prescriptive SmartStart program. Some measures and proposed upgrade projects may be eligible for higher incentives than those shown below through other NJCEP programs as described in Section 8.

The following sections describe the evaluated measures.

4.1 Recommended ECMs

The measures below have been evaluated by the auditor and are recommended for implementation at the facility.

Figure 14 - Summary of Recommended ECMs

Energy Conservation Measure	Recommend?	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	•	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)		CO ₂ e Emissions Reduction (Ibs)
Lighting Upgrades		4,365	1.2	0.0	\$920.14	\$104,025.00	\$750.00	\$103,275.00	112.2	4,395
ECM 1 Retrofit Fixtures with LED Lamps	Yes	2,590	1.2	0.0	\$545.97	\$4,025.00	\$500.00	\$3,525.00	6.5	2,608
Food Service Equipment & Refrigeration Measures		1,328	0.2	0.0	\$279.99	\$2,300.00	\$0.00	\$2,300.00	8.2	1,338
ECM 2 Replace Refrigeration Equipment	Yes	1,328	0.2	0.0	\$279.99	\$2,300.00	\$0.00	\$2,300.00	8.2	1,338
TOTALS (High Priority Measures)			1.3	0.0	\$825.96	\$6,325.00	\$500.00	\$5,825.00	7.1	3,946

^{* -} All incentives presented in this table are based on NJ Smart Start Building equipment incentives and assume proposed equipment meets minimum performance criteria for that program.

4.1.1 Lighting Upgrades

Recommended upgrades to existing lighting fixtures are summarized in Figure 15 below.

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).





Figure 15 - Summary of Lighting Upgrade ECMs

	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)		_	Estimated Install Cost (\$)	Estimated Incentive (\$)	Estimated Net Cost (\$)		CO ₂ e Emissions Reduction (lbs)
Lighting Upgrades		1,289	1.2	0.0	\$271.75	\$2,925.00	\$500.00	\$2,425.00	8.9	1,298
ECM 1	Retrofit Fixtures with LED Lamps	1,289	1.2	0.0	\$271.75	\$2,925.00	\$500.00	\$2,425.00	8.9	1,298

During lighting upgrade planning and design, we recommend a comprehensive approach that considers both the efficiency of the lighting fixtures and how they are controlled. Please see **Appendix A: Equipment Inventory & Recommendations** for a detailed list of the locations and recommended upgrades for each lighting measure.

ECM I: Retrofit Fixtures with LED Lamps

Summary of Measure Economics

Interior/ Exterior		Peak Demand Savings (kW)		Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)	Estimated Net Cost (\$)	Simple Payback Period (yrs)	CO₂e Emissions Reduction (lbs)
Interior	1,289	1.2	0.0	\$271.75	\$2,925.00	\$500.00	\$2,425.00	8.9	1,298
Exterior	1,301	0.3	0.0	\$274.22	\$1,100.00	\$0.00	\$1,100.00	4.0	1,310

Measure Description

We recommend retrofitting existing linear fluorescent T8 fixtures with LED lamps. This measure also recommends retrofitting existing exterior HID wall pack fixtures with LEDs. Many LED tube lamps are direct replacements for existing fluorescent lamps and can be installed while leaving the fluorescent fixture ballast in place. LED bulbs can be used in existing fixtures as a direct replacement for most other lighting technologies. This measure saves energy by installing LEDs which use less power than other lighting technologies yet provide equivalent lighting output for the space.

Additional savings from lighting maintenance can be anticipated since LEDs have lifetimes which are more than twice that of a fluorescent tubes.

4.1.2 Food Service Equipment & Refrigeration Measures

Food service and refrigeration measures recommendations are summarized in Figure 16 below.

Figure 16 - Summary of Food Service Equipment & Refrigeration ECMs

	Energy Conservation Measure Food Service Equipment & Refrigeration Measures C.M. 2. Replace Refrigeration Equipment		Peak Demand Savings (kW)		_	Estimated Install Cost (\$)	Estimated Incentive (\$)	Estimated Net Cost (\$)		CO ₂ e Emissions Reduction (lbs)
	Food Service Equipment & Refrigeration Measures		0.2	0.0	\$279.99	\$2,300.00	\$0.00	\$2,300.00	8.2	1,338
ECM 2	Replace Refrigeration Equipment	1,328	0.2	0.0	\$279.99	\$2,300.00	\$0.00	\$2,300.00	8.2	1,338





Please see **Appendix A: Equipment Inventory & Recommendations** for more details on existing food service and refrigeration and our recommended measures for this category.

ECM 2: Replace Refrigeration Equipment

Summary of Measure Economics

	Peak Demand Savings (kW)			Estimated Install Cost (\$)		Estimated Net Cost (\$)	Simple Payback Period (yrs)	CO₂e Emissions Reduction (lbs)
1,328	0.2	0.0	\$279.99	\$2,300.00	\$0.00	\$2,300.00	8.2	1,338

Measure Description

We recommend replacing an existing freezer chest with new Energy Star™ high efficiency equipment. There have been many improvements in refrigeration system equipment, operation, and insulation. The energy savings associated with this measure come from reduced energy usage, due to more efficient technology, and reduced run times.

4.2 ECMs Evaluated But Not Recommended

The measures below have been evaluated by the auditor but are not recommended for implementation at the facility. Reasons for exclusion can be found in each measure description section.

Figure 17 – Summary of Measures Evaluated, But Not Recommended

Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	·	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)	Simple Payback Period (yrs)**	CO ₂ e Emissions Reduction (lbs)
Lighting Upgrades	1,775	0.0	0.0	\$374.17	\$100,000.00	\$250.00	\$99,750.00	266.6	1,787
Install LED Fixtures	1,775	0.0	0.0	\$374.17	\$100,000.00	\$250.00	\$99,750.00	266.6	1,787
Lighting Control Measures	289	0.2	0.0	\$61.01	\$1,350.00	\$175.00	\$1,175.00	19.3	291
Install Occupancy Sensor Lighting Controls	289	0.2	0.0	\$61.01	\$1,350.00	\$175.00	\$1,175.00	19.3	291
TOTALS	2,064	0.2	0.0	\$435.18	\$101,350.00	\$425.00	\$100,925.00	231.9	2,079

^{* -} All incentives presented in this table are based on NJ Smart Start Building equipment incentives and assume proposed equipment meets minimum performance criteria for that program.

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).





Install LED Fixtures

Summary of Measure Economics

Interior/ Exterior		Peak Demand Savings (kW)		Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)	Estimated Net Cost (\$)	Simple Payback Period (yrs)	CO ₂ e Emissions Reduction (lbs)
Interior	0	0.0	0.0	\$0.00	\$0.00	\$0.00	\$0.00	0.0	0
Exterior	1,775	0.0	0.0	\$374.17	\$100,000.00	\$250.00	\$99,750.00	266.6	1,787

Measure Description

We recommend replacing existing pole mounted stadium light fixtures containing metal halide lamps and ballasts with new high performance LED light fixtures. This measure saves energy by installing LEDs which use less power than other technologies with a comparable light output.

Additional savings from lighting maintenance can be anticipated since LEDs have lifetimes which are much longer than traditional HID technology.

Please see **Appendix A: Equipment Inventory & Recommendations** for a detailed list of lighting fixture locations and proposed measures.

Reasons for not Recommending

The payback period associated with replacement of the exterior light fixtures exceeds the average life of the equipment, therefore, the project is not recommended on the basis of energy savings alone. However, this measure was evaluated to demonstrate the potential benefits available for upgrading to high efficiency equipment. Some of the other benefits may include improved quality of light, reliability of operations, and reduced maintenance costs. These additional factors may support justification for implementing this measure. Also, the cost associated with implementing LED exterior lighting upgrades continues to reduce as the technology continues to gain acceptance. This measure was evaluated based on facility staff's interest.

Install Occupancy Sensor Lighting Controls

Summary of Measure Economics

	Peak Demand Savings (kW)			Estimated Install Cost (\$)	Estimated Incentive (\$)	Estimated Net Cost (\$)	Simple Payback Period (yrs)	CO₂e Emissions Reduction (lbs)
289	0.2	0.0	\$61.01	\$1,350.00	\$175.00	\$1,175.00	19.3	291

Measure Description

We recommend installing occupancy sensors to control lighting fixtures that are currently controlled by manual switches in all rooms. Lighting sensors detect occupancy using ultrasonic and/or infrared sensors. For most spaces, we recommend lighting controls use dual technology sensors, which can eliminate the





possibility of any lights turning off unexpectedly. Lighting systems are enabled when an occupant is detected. Fixtures are automatically turned off after an area has been vacant for a preset period. Some controls also provide dimming options and all modern occupancy controls can be easily over-ridden by room occupants to allow them to manually turn fixtures on or off, as desired. Energy savings results from only operating lighting systems when they are required.

Occupancy sensors may be mounted on the wall at existing switch locations, mounted on the ceiling, or in remote locations. In general, wall switch replacement sensors are recommended for single occupant offices and other small rooms. Ceiling-mounted or remote mounted sensors are used in locations without local switching or where wall switches are not in the line-of-sight of the main work area and in large spaces. We recommend a comprehensive approach to lighting design that upgrades both the lighting fixtures and the controls together for maximum energy savings and improved lighting for occupants.

Please see **Appendix A: Equipment Inventory & Recommendations** for a detailed list of lighting fixture locations and proposed measures.

Reasons for not Recommending

This measure is cost prohibitive and is not recommended on the basis of energy savings alone because the poor payback period. However, this measure was at least evaluated to demonstrate the potential savings.





5 ENERGY EFFICIENT PRACTICES

In addition to the quantifiable savings estimated in Section 4, a facility's energy performance can also be improved through application of many low cost or no-cost energy efficiency strategies. By employing certain behavioral and operational changes and performing routine maintenance on building systems, equipment lifetime can be extended; occupant comfort, health and safety can be improved; and energy and O&M costs can be reduced. The recommendations below are provided as a framework for developing a whole building maintenance plan that is customized to your facility. Consult with qualified equipment specialists for details on proper maintenance and system operation.

Perform Proper Lighting Maintenance

In order to sustain optimal lighting levels, lighting fixtures should undergo routine maintenance. Light levels decrease over time due to lamp aging, lamp and ballast failure, and buildup of dirt and dust on lamps, fixtures and reflective surfaces. Together, these factors can reduce total illumination by 20% - 60% or more, while operating fixtures continue drawing full power. To limit this reduction, lamps, reflectors and diffusers should be thoroughly cleaned of dirt, dust, oil, and smoke film buildup approximately every 6 – 12 months.

Develop a Lighting Maintenance Schedule

In addition to routine fixture cleaning, development of a maintenance schedule can both ensure maintenance is performed regularly and can reduce the overall cost of fixture re-lamping and re-ballasting. By re-lamping and re-ballasting fixtures in groups, lighting levels are better maintained and the number of site visits by a lighting technician or contractor can be minimized, decreasing the overall cost of maintenance.

Perform Proper Water Heater Maintenance

At least once a year, drain a few gallons out of the water heater using the drain valve. If there is a lot of sediment or debris, then a full flush is recommended. Turn the temperature down and then completely drain the tank. Once a year check for any leaks or heavy corrosion on the pipes and valves. For gas water heaters, check the draft hood and make sure it is placed properly, with a few inches of air space between the tank and where it connects to the vent. Look for any corrosion or wear on the gas line and on the piping. If you noticed any black residue, soot or charred metal, this is a sign you may be having combustion issues and you should have the unit serviced by a professional. For electric water heaters, look for any signs of leaking such as rust streaks or residue around the upper and lower panels covering the electrical components on the tank. For water heaters over three to four years old have a technician inspect the sacrificial anode annually.

Water Conservation

Installing low-flow faucets or faucet aerators, low-flow showerheads, and kitchen sink pre-rinse spray valves saves both energy and water. These devices save energy by reducing the overall amount of hot water used hence reducing the energy used to heat the water. The flow ratings for EPA WaterSense™ (http://www3.epa.gov/watersense/products) labeled devices are 1.5 gpm for bathroom faucets, 2.0 gpm for showerheads, and 1.28 gpm for pre-rinse spray valves.

Installing dual flush or low-flow toilets and low-flow or waterless urinals are additional ways to reduce the sites water use, however, these devices do not provide energy savings at the site level. Any reduction in water use does however ultimately reduce grid level electricity use since a significant amount of electricity





is used to deliver water from reservoirs to end users. The EPA WaterSense™ ratings for urinals is 0.5 gallons per flush (gpf) and toilets that use as little as 1.28 gpf (this is lower than the current 1.6 gpf federal standard).

Refer to Section **Error! Reference source not found.** for any low-flow ECM recommendations.





6 ON-SITE GENERATION MEASURES

On-Site Generation measure options include both renewable (e.g., solar, wind) and non-renewable (e.g., fuel cells) on-site technologies that generate power to meet all or a portion of the electric energy needs of a facility, often repurposing any waste heat where applicable. Also referred to as distributed generation, these systems contribute to Greenhouse Gas (GHG) emission reductions, demand reductions and reduced customer electricity purchases, resulting in the electric system reliability through improved transmission and distribution system utilization.

The State of New Jersey's Energy Master Plan (EMP) encourages new distributed generation of all forms and specifically focuses on expanding use of combined heat and power (CHP) by reducing financial, regulatory and technical barriers and identifying opportunities for new entries. The EMP also outlines a goal of 70% of the State's electrical needs to be met by renewable sources by 2050.

Preliminary screenings were performed to determine the potential that a generation project could provide a cost-effective solution for your facility. Before making a decision to implement, a feasibility study should be conducted that would take a detailed look at existing energy profiles, siting, interconnection, and the costs associated with the generation project including interconnection costs, departing load charges, and any additional special facilities charges.

6.1 Photovoltaic

Sunlight can be converted into electricity using photovoltaics (PV) modules. Modules are racked together into an array that produces direct current (DC) electricity. The DC current is converted to alternating current (AC) through an inverter. The inverter is interconnected to the facility's electrical distribution system. The amount of unobstructed area available determines how large of a solar array can be installed. The size of the array combined with the orientation, tilt, and shading elements determines the energy produced.

A preliminary screening based on the facility's electric demand, size and location of free area, and shading elements shows that the facility has a Low potential for installing a PV array.

In order to be cost-effective, a solar PV array needs certain minimum criteria, such as flat or south-facing rooftop or other unshaded space on which to place the PV panels. In our opinion, the facility does appear not meet these minimum criteria for cost-effective PV installation.

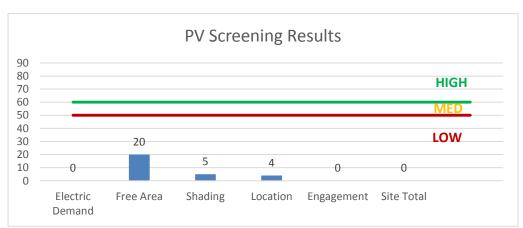


Figure 18 - Photovoltaic Screening





For more information on solar PV technology and commercial solar markets in New Jersey, or to find a qualified solar installer, who can provide a more detailed assessment of the specific costs and benefits of solar develop of the site, please visit the following links below:

- Basic Info on Solar PV in NJ: http://www.njcleanenergy.com/whysolar
- NJ Solar Market FAQs: http://www.njcleanenergy.com/renewable-energy/program-updates-and-background-information/solar-transition/solar-market-faqs
- Approved Solar Installers in the NJ Market: http://www.njcleanenergy.com/commercial-industrial/programs/nj-smartstart-buildings/tools-and-resources/tradeally/approved_vendorsearch/?id=60&start=1

6.2 Combined Heat and Power

Combined heat and power (CHP) is the on-site generation of electricity along with the recovery of heat energy, which is put to beneficial use. Common technologies for CHP include reciprocating engines, microturbines, fuel cells, backpressure steam turbines, and (at large facilities) gas turbines. Electric generation from a CHP system is typically interconnected to local power distribution systems. Heat is recovered from exhaust and ancillary cooling systems and interconnected to the existing hot water (or steam) distribution systems.

CHP systems are typically used to produce a portion of the electric power used onsite by a facility, with the balance of electric power needs supplied by grid purchases. The heat is used to supplement (or supplant) existing boilers for the purpose of space heating and/or domestic hot water heating. Waste heat can also be routed through absorption chillers for the purpose of space cooling. The key criteria used for screening, however, is the amount of time the system operates at full load and the facility's ability to use the recovered heat. Facilities with continuous use for large quantities of waste heat are the best candidates for CHP.

A preliminary screening based on heating and electrical demand, siting, and interconnection shows that the facility has a Low potential for installing a cost-effective CHP system.

Lack of gas service therefore provides that there is no potential for CHP at the site.

For a list of qualified firms in New Jersey specializing in commercial CHP cost assessment and installation, go to: http://www.nicleanenergy.com/commercial-industrial/programs/ni-smartstart-buildings/tools-and-resources/tradeally/approved_vendorsearch/

CHP Screening Results 140 HIGH 120 100 MED 80 60 LOW 40 12 20 0 0 0 0 0 Gas Service Thermal Electric Location Engagement Site Total Demand Demand

Figure 19 - Combined Heat and Power Screening





Please see Section **Error! Reference source not found.** for additional information in the Combined Heat Power and Fuel Cell Program.





7 DEMAND RESPONSE

Demand Response (DR) is a program designed to reduce the electric load of commercial facilities when electric wholesale prices are high or when the reliability of the electric grid is threatened due to peak demand. Demand Response service providers (a.k.a. Curtailment Service Providers) are registered with PJM, the independent system operator (ISO) for mid-Atlantic state region that is charged with maintaining electric grid reliability.

By enabling grid operators to call upon Curtailment Service Providers and commercial facilities to reduce electric usage during times of peak demand, the grid is made more reliable and overall transmission costs are reduced for all ratepayers. Curtailment Service Providers provide regular payments to medium and large consumers of electric power for their participation in DR programs. Program participation is voluntary and participants receive payments whether or not their facility is called upon to curtail their electric usage.

Typically an electric customer needs to be capable of reducing their electric demand, within minutes, by at least 100 kW or more in order to participate in a DR program. Customers with a greater capability to quickly curtail their demand during peak hours will receive higher payments. Customers with back-up generators onsite may also receive additional DR payments for their generating capacity if they agree to run the generators for grid support when called upon. Eligible customers who have chosen to participate in a DR programs often find it to be a valuable source of revenue for their facility because the payments can significantly offset annual electric costs.

Participating customers can often quickly reduce their peak load through simple measures, such as temporarily raising temperature set points on thermostats, so that air conditioning units run less frequently, or agreeing to dim or shut off less critical lighting. This usually requires some level of building automation and controls capability to ensure rapid load reduction during a DR curtailment event. DR program participants may need to install smart meters or may need to also sub-meter larger energy-using equipment, such as chillers, in order to demonstrate compliance with DR program requirements.

DR does not include the reduction of electricity consumption based on normal operating practice or behavior. For example, if a company's normal schedule is to close for a holiday, the reduction of electricity due to this closure or scaled-back operation is not considered a demand response activity in most situations.

The first step toward participation in a DR program is to contact a Curtailment Service Provider. A list of these providers is available on PJM's website and it includes contact information for each company, as well as the states where they have active business (www.pjm.com/markets-and-operations/demand-response/csps.aspx). PJM also posts training materials that are developed for program members interested in specific rules and requirements regarding DR activity (www.pjm.com/training/trainingmaterial.aspx), along with a variety of other DR program information.

Curtailment Service Providers typically offer free assessments to determine a facility's eligibility to participate in a DR program. They will provide details regarding program rules and requirements for metering and controls, assess a facility's ability to temporarily reduce electric load, and provide details on payments to be expected for participation in the program. Providers usually offer multiple options for DR to larger facilities and may also install controls or remote monitoring equipment of their own to help ensure compliance with all terms and conditions of a DR contract.





8 Project Funding / Incentives

The NJCEP is able to provide the incentive programs described below, and other benefits to ratepayers, because of the Societal Benefits Charge (SBC) Fund. The SBC was created by the State of New Jersey's Electricity Restructuring Law (1999), which requires all customers of investor-owned electric and gas utilities to pay a surcharge on their monthly energy bills. As a customer of a state-regulated electric or gas utility and therefore a contributor to the fund your organization is eligible to participate in the LGEA program and also eligible to receive incentive payment for qualifying energy efficiency measures. Also available through the NJBPU are some alternative financing programs described later in this section. Please refer to Figure 20 for a list of the eligible programs identified for each recommended ECM.

Combined Pay For Large SmartStart SmartStart Performance Energy **Energy Conservation Measure** Direct Install Prescriptive Custom Existing Users Power and **Buildings** Program Fuel Cell ECM 1 Retrofit Fixtures with LED Lamps

Х

Figure 20 - ECM Incentive Program Eligibility

SmartStart (SS) is generally well-suited for implementation of individual measures or small group of measures. It provides flexibility to install measures at your own pace using in-house staff or a preferred contractor. Direct Install (DI) caters to small to mid-size facilities that can bundle multiple ECMs together. This can greatly simplify participation and may lead to higher incentive amounts, but requires the use of pre-approved contractors. The Pay for Performance (P4P) program is a "whole-building" energy improvement program designed for larger facilities. It requires implementation of multiple measures meeting minimum savings thresholds, as well as use of pre-approved consultants. The Large Energy Users Program (LEUP) is available to New Jersey's largest energy users giving them flexibility to install as little or as many measures, in a single facility or several facilities, with incentives capped based on the entity's annual energy consumption. LEUP applicants can use in-house staff or a preferred contractor.

Generally, the incentive values provided throughout the report assume the SS program is utilized because it provides a consistent basis for comparison of available incentives for various measures, though in many cases incentive amounts may be higher through participation in other programs.

Brief descriptions of all relevant financing and incentive programs are located in the sections below. Further information, including most current program availability, requirements, and incentive levels can be found at: www.njcleanenergy.com/ci

8.1 SmartStart

Overview

ECM 2

Replace Refrigeration Equipment

The SmartStart (SS) program offers incentives for installing prescriptive and custom energy efficiency measures at your facility. Routinely the program adds, removes or modifies incentives from year to year for various energy efficiency equipment based on market trends and new technologies.

Equipment with Prescriptive Incentives Currently Available:

Electric Chillers
Electric Unitary HVAC
Gas Cooling





Gas Heating
Gas Water Heating
Ground Source Heat Pumps
Lighting
Lighting Controls
Refrigeration Doors
Refrigeration Controls
Refrigerator/Freezer Motors
Food Service Equipment
Variable Frequency Drives

Most equipment sizes and types are served by this program. This program provides an effective mechanism for securing incentives for energy efficiency measures installed individually or as part of a package of energy upgrades.

Incentives

The SS prescriptive incentive program provides fixed incentives for specific energy efficiency measures, whereas the custom SS program provides incentives for more unique or specialized technologies or systems that are not addressed through prescriptive incentive offerings for specific devices.

Since your facility is an existing building, only the Retrofit incentives have been applied in this report. Custom Measure incentives are calculated at \$0.16/kWh and \$1.60/therm based on estimated annual savings, capped at 50% of the total installed incremental project cost, or a project cost buy down to a one year payback (whichever is less. Program incentives are capped at \$500,000 per electric account and \$500,000 per natural gas account, per fiscal year.

How to Participate

To participate in the SmartStart program you will need to submit an application for the specific equipment to be installed. Many applications are designed as rebates, although others require application approval prior to installation. Applicants may work with a contractor of their choosing and can also utilize internal personnel, which provides added flexibility to the program. Using internal personnel also helps improve the economics of the ECM by reducing the labor cost that is included in the tables in this report.

Detailed program descriptions, instructions for applying and applications can be found at: www.njcleanenergy.com/SSB

8.2 Direct Install

Overview

Direct Install (DI) is a turnkey program available to existing small to medium-sized facilities with a peak electric demand that does not exceed 200 kW for any recent 12-month period. You will work directly with a pre-approved contractor who will perform a free energy assessment at your facility, identify specific eligible measures, and provide a clear scope of work for installation of selected measures. Energy efficiency measures may include lighting and lighting controls, refrigeration, HVAC, motors, variable speed drives and controls.

Incentives

The program pays up to **70%** of the total installed cost of eligible measures, up to \$125,000 per project. Direct Install participants will also be held to a fiscal year cap of \$250,000 per entity.





How to Participate

To participate in the DI program you will need to contact the participating contractor who the region of the state where your facility is located. A complete list of DI program partners is provided on the DI website linked below. The contractor will be paid the measure incentives directly by the program which will pass on to you in the form of reduced material and implementation costs. This means up to 70% of eligible costs are covered by the program, subject to program caps and eligibility, while the remaining 30% of the cost is paid to the contractor by the customer.

Since DI offers a free assessment of eligible measures, DI is also available to small businesses and other commercial facilities too that may not be eligible for the more detailed facility audits provided by LGEA.

Detailed program descriptions and applications can be found at: www.njcleanenergy.com/DI

8.3 Energy Savings Improvement Program

The Energy Savings Improvement Program (ESIP) is an alternate method for New Jersey's government agencies to finance the implementation of energy conservation measures. An ESIP is a type of "performance contract", whereby school districts, counties, municipalities, housing authorities and other public and state entities enter in to contracts to help finance building energy upgrades. This is done in a manner that ensures that annual payments are lower than the savings projected from the ECMs, ensuring that ESIP projects are cash flow positive in year one, and every year thereafter. ESIP provides government agencies in New Jersey with a flexible tool to improve and reduce energy usage with minimal expenditure of new financial resources. NJCEP incentive programs can be leveraged to help further reduce the total project cost of eligible measures.

This LGEA report is the first step to participating in ESIP. Next, you will need to select an approach for implementing the desired ECMs:

- Use an Energy Services Company or "ESCO";
- (2) Use independent engineers and other specialists, or your own qualified staff, to provide and manage the requirements of the program through bonds or lease obligations;
- (3) Use a hybrid approach of the two options described above where the ESCO is utilized for some services and independent engineers, or other specialists or qualified staff, are used to deliver other requirements of the program.

After adopting a resolution with a chosen implementation approach, the development of the Energy Savings Plan (ESP) can begin. The ESP demonstrates that the total project costs of the ECMs are offset by the energy savings over the financing term, not to exceed 15 years. The verified savings will then be used to pay for the financing.

The ESIP approach may not be appropriate for all energy conservation and energy efficiency improvements. Entities should carefully consider all alternatives to develop an approach that best meets their needs. A detailed program descriptions and application can be found at: www.njcleanenergy.com/ESIP

Please note that ESIP is a program delivered directly by the NJBPU and is not an NJCEP incentive program. As mentioned above, you may utilize NJCEP incentive programs to help further reduce costs when developing the ESP. You should refer to the ESIP guidelines at the link above for further information and quidance on next steps.





8.4 Demand Response Energy Aggregator

The first step toward participation in a Demand Response (DR) program is to contact a Curtailment Service Provider. A list of these providers is available on PJM's website and it includes contact information for each company, as well as the states where they have active business (www.pjm.com/markets-and-operations/demand-response/csps.aspx). PJM also posts training materials that are developed for program members interested in specific rules and requirements regarding DR activity (www.pjm.com/training/trainingmaterial.aspx), along with a variety of other program information.

Curtailment Service Providers typically offer free assessments to determine a facility's eligibility to participate in a DR program. They will provide details regarding the program rules and requirements for metering and controls, a facility's ability to temporarily reduce electric load, as well as the payments involved in participating in the program. Also, these providers usually offer multiple options for DR to larger facilities and may also install controls or remote monitoring equipment to help ensure compliance of all terms and conditions of a DR contract.

See Section 7 for additional information.





9 ENERGY PURCHASING AND PROCUREMENT STRATEGIES

9.1 Retail Electric Supply Options

In 1999, New Jersey State Legislature passed the Electric Discount & Energy Competition Act (EDECA) to restructure the electric power industry in New Jersey. This law deregulated the retail electric markets, allowing all consumers to shop for service from competitive electric suppliers. The intent was to create a more competitive market for electric power supply in New Jersey. As a result, utilities were allowed to charge Cost of Service and customers were given the ability to choose a third party (i.e. non-utility) energy supplier.

Energy deregulation in New Jersey has increased energy buyers' options by separating the function of electricity distribution from that of electricity supply. So, though you may choose a different company from which to buy your electric power, responsibility for your facility's interconnection to the grid and repair to local power distribution will still reside with the traditional utility company serving your region.

If your facility is not purchasing electricity from a third party supplier, consider shopping for a reduced rate from third party electric suppliers. If your facility is purchasing electricity from a third party supplier, review and compare prices at the end of the current contract or every couple years.

A list of third party electric suppliers, who are licensed by the state to provide service in New Jersey, can be found online at: www.state.nj.us/bpu/commercial/shopping.html.

9.2 Retail Natural Gas Supply Options

The natural gas market in New Jersey has also been deregulated. Most customers that remain with the utility for natural gas service pay rates that are market-based and that fluctuate on a monthly basis. The utility provides basic gas supply service (BGSS) to customers who choose not to buy from a Third Party Supplier for natural gas commodity.

A customer's decision about whether to buy natural gas from a retail supplier is typically dependent upon whether a customer seeks budget certainty and/or longer-term rate stability. Customers can secure longer-term fixed prices by signing up for service through a third party retail natural gas supplier. Many larger natural gas customers may seek the assistance of a professional consultant to assist in their procurement process.

If your facility is not purchasing natural gas from a third party supplier, consider shopping for a reduced rate from third party natural gas suppliers. If your facility is purchasing natural gas from a third party supplier, review and compare prices at the end of the current contract or every couple years.

A list of third party natural gas suppliers, who are licensed by the state to provide service in New Jersey, can be found online at: www.state.nj.us/bpu/commercial/shopping.html.





Appendix A: Equipment Inventory & Recommendations

Lighting Inventory & Recommendations

	Existing C	onditions	<u></u>			Proposed Condition	ıs						Energy Impact	& Financial A	nalysis				
Location	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Field Lights	6	Metal Halide: (1) 1500W Lamp	None	1,610	50	Fixture Replacement	No	6	LED - Fixtures: Other	None	900	50	-4.39	-305	0.0	-\$64.32	\$12,000.00	\$30.00	-186.11
Field Lights	12	Metal Halide: (1) 1500W Lamp	None	1,610	50	Fixture Replacement	No	12	LED - Fixtures: Other	None	900	50	-8.79	-610	0.0	-\$128.63	\$24,000.00	\$60.00	-186.11
Field Lights	16	Metal Halide: (1) 1500W Lamp	None	1,610	50	Fixture Replacement	No	16	LED - Fixtures: Other	None	900	50	-11.72	-814	0.0	-\$171.51	\$32,000.00	\$80.00	-186.11
Field Lights	6	Metal Halide: (1) 1500W Lamp	None	1,610	50	Fixture Replacement	No	6	LED - Fixtures: Other	None	900	50	-4.39	-305	0.0	-\$64.32	\$12,000.00	\$30.00	-186.11
Field Lights	6	Metal Halide: (1) 1500W Lamp	None	1,610	50	Fixture Replacement	No	6	LED - Fixtures: Other	None	900	50	-4.39	-305	0.0	-\$64.32	\$12,000.00	\$30.00	-186.11
Field Lights	4	Metal Halide: (1) 1500W Lamp	None	1,610	50	Fixture Replacement	No	4	LED - Fixtures: Other	None	900	50	-2.93	-203	0.0	-\$42.88	\$8,000.00	\$20.00	-186.11
Building Mounted	11	High-Pressure Sodium: (1) 50W Lamp	None	66	3,285	LED Retrofit	No	11	LED Screw-In Lamps: LED Retrofit Kit	None	30	3,285	-0.27	-1,225	0.0	-\$258.23	\$1,100.00	\$0.00	-4.26
Restroom	10	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	62	1,027	Relamp	Yes	10	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	719	0.34	484	0.0	\$102.01	\$855.00	\$135.00	7.06
Storage	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	62	100	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	100	0.03	4	0.0	\$0.79	\$58.50	\$10.00	61.70
Restroom	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	62	1,027	Relamp	Yes	6	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	719	0.20	290	0.0	\$61.21	\$621.00	\$95.00	8.59
Garage	8	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	62	500	Relamp	No	8	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	500	0.21	149	0.0	\$31.44	\$468.00	\$80.00	12.34
Trophy Room	8	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	62	1,027	Relamp	Yes	8	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	719	0.27	387	0.0	\$81.61	\$738.00	\$115.00	7.63
Storage	4	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	62	100	Relamp	Yes	4	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	70	0.14	19	0.0	\$3.97	\$504.00	\$75.00	107.97
Concessions	8	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	62	1,027	Relamp	Yes	8	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	719	0.27	387	0.0	\$81.61	\$738.00	\$115.00	7.63
Storage	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	62	100	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	100	0.05	7	0.0	\$1.57	\$117.00	\$20.00	61.70
Mechanical Room	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	62	500	Relamp	No	3	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	500	0.08	56	0.0	\$11.79	\$175.50	\$30.00	12.34





Electric HVAC Inventory & Recommendations

	•	Existing (Conditions			Proposed	Condition	s					Energy Impact	& Financial A	nalysis				
Location	Area(s)/System(s) Served	System Quantity	System Tyne		Capacity per Unit			System Type	Capacity per Unit	Cooling Mode Efficiency (SEER/EER)	Heating Mode Efficiency (COP)	Install Dual Enthalpy Economizer?		Total Annual	MMRfu	Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years
Through Wall	Trophy Room	1	Window AC	1.50		No						No	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Cabinet Heaters	Trophy Room	2	Electric Resistance Heat		25.00	No						No	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00

DHW Inventory & Recommendations

		Existing (Conditions	Proposed	Condition	s				Energy Impact	& Financial A	nalysis				
Location	Area(s)/System(s) Served	System Quantity	System Tyne	Renlace?	System Quantity	System Tyne	Fuel Type	System Efficiency	•	Total Peak kW Savings	Total Annual	MMRtu	Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years
Mechanical Room	Park Building	1	Storage Tank Water Heater (≤ 50 Gal)	No						0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00





Commercial Refrigerator/Freezer Inventory & Recommendations

	Existing (Conditions		Proposed Condi	Energy Impact	t & Financial Ar	nalysis				
Location	Quantity	Refrigerator/ Freezer Type	ENERGY STAR Qualified?	Install ENERGY STAR Equipment?	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Concessions	1	Stand-Up Refrigerator, Solid Door (16 - 30 cu. ft.)	Yes	No	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Concessions	1	Stand-Up Refrigerator, Solid Door (16 - 30 cu. ft.)	Yes	No	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Concessions	1	Stand-Up Refrigerator, Solid Door (16 - 30 cu. ft.)	Yes	No	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Concessions	1	Stand-Up Refrigerator, Glass Door (16 - 30 cu. ft.)	Yes	No	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Concessions	2	Stand-Up Freezer, Solid Door (16 - 30 cu. ft.)	No	No	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Concessions	2	Stand-Up Refrigerator, Solid Door (16 - 30 cu. ft.)	No	No	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00
Concessions	1	Freezer Chest	No	Yes	0.15	1,328	0.0	\$279.99	\$2,300.00	\$0.00	8.21

Cooking Equipment Inventory & Recommendations

	Existing Con	ditions		Proposed Conditions	Energy Impact	t & Financial Ar	nalysis				
Location	Quantity	Equipment Type	High Efficiency Equipement?	,	Total Peak kW Savings	Total Annual	MMRtu	Total Annual Energy Cost Savings		T otal Incentives	Simple Payback w/ Incentives in Years
Concessions	2	Electric Convection Oven (Half Size)	Yes	No	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00

Dishwasher Inventory & Recommendations

	Existing Cor	ditions				Proposed Conditions	Energy Impact	& Financial A	nalysis				
Location	Quantity	Dishwasher Type	Water Heater Fuel Type	Booster Heater Fuel Type	ENERGY STAR Qualified?	Install ENERGY STAR Equipment?	Total Peak kW Savings	Total Annual	I MMRfu	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Payback w/ Incentives in Years
Concessions	1	Under Counter (Low Temp)	Electric	N/A	Yes	No	0.00	0	0.0	\$0.00	\$0.00	\$0.00	0.00





Plug Load Inventory

	Existing Conditions			
Location	Quantity	Equipment Description	Energy Rate (W)	ENERGY STAR Qualified?
Park Building	1	Microwave	1,500.0	
Park Building	1	Coffee Maker	1,200.0	
Park Building	1	Fans	100.0	
Park Building	1	Food Heaters	1,000.0	_



